

Definition of the Flexible Image Transport System (**FITS***FITS*)

The **FITS***FITS* Standard

Version 4.0: updated 2016 July 22 by the IAUFWG

Document Original document publication date: 2016 July 22
Language-edited document publication date: 2018 August xx

FITS*FITS* Working Group ¹
Commission 5: Documentation and Astronomical Data ²
International Astronomical Union
<http://fits.gsfc.nasa.gov/iaufwg/>

¹ to be absorbed in Data Representation Working Group under new Commission B2

² now Commission B2 Data and Documentation

DRAFT

Contents

List of Tables

DRAFT

DRAFT

1. Introduction

An archival format must be utterly portable and self-describing, on the assumption that, apart from the transcription device, neither the software nor the hardware that wrote the data will be available when the data are read. ‘Preserving Scientific Data on our Physical Universe,’ p. 60. Steering Committee for the Study on the Long-Term Retention of Selected Scientific and Technical Records of the Federal Government, [US] National Research Council, National Academy Press 1995.

This document, hereafter referred to as the ‘**standardStandard**’, describes the Flexible Image Transport System (**FITSFITS**), which is the standard archival data format for astronomical data sets. Although **FITSFITS** was originally designed for transporting image data on magnetic tape (which accounts for the ‘I’ and ‘T’ in the name), the capabilities of the **FITSFITS** format have expanded to accommodate **more complex more-complex** data structures. The role of **FITSFITS** has also grown from simply a way to transport data between different analysis software systems into the preferred format for data in astronomical archives, as well as the on-line analysis format used by many software packages.

This standard is intended as a formal codification of the **FITSformatFITS format**, which has been endorsed by the International Astronomical Union (IAU) for the interchange of astronomical data (?). It is fully consistent with all actions and endorsements of the IAU **FITSFITS** Working Group (IAUFWG), which was appointed by Commission 5 of the IAU to oversee further development of the **FITSFITS** format. In particular, this standard defines the organization and content of the header and data units for all standard **FITSFITS** data structures: the primary array, the **random groups random-groups** structure, the image extension, the **ASCII table ASCII-table** extension, and the **binary table binary-table** extension. It also specifies minimum structural requirements and general principles governing the creation of new extensions. For headers, it specifies the proper syntax for keyword records and defines required and reserved keywords. For data, it specifies **character and numeric value character-and numeric-value** representations and the ordering of contents within the byte stream.

One important feature of the **FITSFITS** format is that its structure, down to the bit level, is completely specified in documents (such as this standard), many of which have been published in refereed scientific journals. Given these documents, which are readily available in hard copy form in libraries around the world as well as in electronic form on the Internet, future researchers should be able to decode the stream of bytes in any **FITSFITS** format data file. In contrast, many other current data formats are only implicitly defined by the software that reads and writes the files. If that software is not continually maintained so that it can be run on future computer systems, then the information encoded in those data files could be lost.

1.1. Brief history of **FITSFITS**

The **FITSFITS** format evolved out of the recognition that a standard format was needed for transferring astronomical images from one research institution to another. The first prototype developments of a universal interchange format that would eventu-

ally lead to the definition of the **FITSFITS** format began in 1976 between Don Wells at KPNO and Ron Harten at the Netherlands Foundation for Research in Astronomy (NFRA). This need for an image interchange format was raised at a meeting of the Astronomy section of the U.S. National Science Foundation in January 1979, which led to the formation of a task force to work on the problem. Most of the technical details of the first basic **FITSFITS** agreement (with files consisting of only a primary header followed by a data array) were subsequently developed by Don Wells and Eric Greisen (NRAO) in March 1979. After further refinements, and successful image interchange tests between observatories that used widely different types of computer systems, the first papers that defined the **FITSFITS** format were published in 1981 (?). The **FITSFITS** format quickly became the **de facto de facto** standard for data interchange within the astronomical community (mostly on **9-track nine-track** magnetic tape at that time), and was officially endorsed by the IAU in 1982 (?). Most national and international astronomical projects and organizations subsequently adopted the **FITSFITS** format for distribution and archiving of their scientific data products. Some of the highlights in the developmental history of **FITSFITS** are shown in Table ??.

1.2. Version history of this document

The fundamental definition of the **FITSFITS** format was originally contained in a series of published papers (????). As **FITSFITS** became more widely used, the need for a single document to unambiguously define the requirements of the **FITSFITS** format became apparent. In 1990, the NASA Science Office of Standards and Technology (NOST) at the Goddard Space Flight Center provided funding for a technical panel to develop the first version of this **standard Standard** document. As shown in Table ??, the NOST panel produced several draft versions, culminating in the first NOST standard document, NOST 100-1.0, in 1993. Although this document was developed under a NASA accreditation process, it was subsequently formally approved by the IAUFWG, which is the international control authority for the **FITSFITS** format. The small update to the **standard Standard** in 1995 (NOST 100-1.1) added a recommendation on the physical units of header keyword values.

The NOST technical panel was convened a second time to make further updates and clarifications to the **standardStandard**, resulting in the NOST 100-2.0 version **that , which** was approved by the IAUFWG in 1999 and published in 2001 (?). In 2005, the IAUFWG formally approved the variable-length array convention in binary tables, and a short time later approved support for the 64-bit integers data type. New versions of the **standard Standard** were released to reflect both of these changes (**versions IAUFWG Versions IAUFWG 2.1 and IAUFWG 2.1b**).

In early 2007 the IAUFWG appointed its own technical panel to consider further modifications and updates to the **standardStandard**. The changes proposed by this panel, which were ultimately approved in 2008 by the IAUFWG after a formal public review process, are shown in the **Version 3.0 version** of the document, published in ?.

Since 2006 a Registry for **FITS** conventions submitted by the community was established under the care of the IAUFWG at http://fits.gsfc.nasa.gov/fits_registry.html. The Registry was intended as a repository of documentation of usages, which, although not endorsed as part of the **FITS** Standard,

Table 1: Significant milestones in the development of *FITSFITS*.

Date	Milestone	Section
1979	Initial <i>FITSFITS</i> Agreement and first interchange of files	
1981	Published original (single HDU) definition (?)	
1981	Published random groups random-groups definition (?)	Sect. ??
1982	Formally endorsed by the IAU (?)	
1988	Defined rules for multiple extensions (?)	
1988	IAU <i>FITSFITS</i> Working Group (IAUFWG) established	
1988	Extended to include ASCII table ASCII-table extensions (?)	Sect. ??
1988	Formal IAU approval of ASCII tables (?)	Sect. ??
1990	Extended to include IEEE floating-point data (?)	Sect. ??
1994	Extended to multiple IMAGEarray IMAGE-array extensions (?)	Sect. ??
1995	Extended to binary table binary-table extensions (?)	Sect. ??
1997	Adopted 4-digit year four-digit-year date format (?)	Sect. ??
2002	Adopted proposals for world coordinate world-coordinate systems (?)	Sect. ??
2002	Adopted proposals for celestial coordinates (?)	Sect. ??
2004	Adopted MIME types for <i>FITSFITS</i> data files (?)	App. ??
2005	Extended to support variable-length arrays in binary tables	Sect. ??
2005	Adopted proposals for spectral coordinate spectral-coordinate systems (?)	Sect. ??
2005	Extended to include 64-bit integer data type	Sect. ??
2006	Adopted WCS HEALPix projection (?)	Sect. ??
2006	Established <i>FITS</i> convention registry	
2014	Adopted proposals for time coordinates (?)	Sect. ??
2016	Adopted proposals for compressed data	Sect. ??
2016	Adopted various registered conventions	App. ??
2018	General language editing	App. ??

Table 2: Version history of the *standardStandard*.

Version	Date	Status
NOST 100-0.1	1990 December	First Draft Standard
NOST 100-0.2	1991 June	Second Revised Draft Standard
NOST 100-0.3	1991 December	Third Revised Draft Standard
NOST 100-1.0	1993 June	NOST Standard
NOST 100-1.1	1995 September	NOST Standard
NOST 100-2.0	1999 March	NOST Standard
IAUFWG 2.1	2005 April	IAUFWG Standard
IAUFWG 2.1b	2005 December	IAUFWG Standard
IAUFWG 3.0	2008 July	IAUFWG Standard
IAUFWG 4.0	2016 July	IAUFWG Standard (approved)
IAUFWG 4.0	2018 August	IAUFWG Standard (language-edited)

are otherwise perfectly legal usages of *FITS*. In 2014 a small team was formed to evaluate the possible incorporation of some conventions within the Standard, while another small team was in charge to update the Standard document with a summary of the WCS time representation (?), which in the meanwhile had been voted natively as part of the *FITS* Standard.

Details on the conventions that have been incorporated into this latest version of the Standard (CONTINUE long-string keywords, blank header space, CHECKSUM, column limits, tiled image and table compression) or only briefly mentioned (keyword inheritance and Green Bank conventions) are described in Appendix ??, which also lists the corresponding affected sections of the Standard.

After the approval by the IAUFWG in July 2016 the Standard was subjected to a thorough language editing (with no impact on the technical prescriptions) before the final issue in 2018. Details about the language editing changes are provided in Appendix ??.

The latest version of the *standardStandard*, as well as other information about the *FITSFITS* format, can be obtained from

the *FITSSupport Office web site* *FITS Support Office web-site* at <http://fits.gsfc.nasa.gov>. This *web site website* also contains the contact information for the Chairman of the IAUFWG, to whom any questions or comments regarding this *standard Standard* should be addressed.

1.3. Acknowledgments

The members of the three technical panels that produced this *standard Standard* are shown below.

First technical panel, 1990 – 19931990–1993

Robert J. Hanisch (Chair)	Space Telescope Science Inst.
Lee E. Brotzman	Hughes STX
Edward Kemper	Hughes STX
Barry M. Schlesinger	Raytheon STX
Peter J. Teuben	University of Maryland
Michael E. Van Steenberg	NASA Goddard SFC
Wayne H. Warren Jr.	Hughes STX
Richard A. White	NASA Goddard SFC

Second technical panel, 1994 – 1999

Robert J. Hanisch (Chair)	Space Telescope Science Inst.
Allen Farris	Space Telescope Science Inst.
Eric W. Greisen	National Radio Astr. Obs.
William D. Pence	NASA Goddard SFC
Barry M. Schlesinger	Raytheon STX
Peter J. Teuben	University of Maryland
Randall W. Thompson	Computer Sciences Corp.
Archibald Warnock	A/WWW Enterprises

Third technical panel, 2007

William D. Pence (Chair)	NASA Goddard SFC
Lucio Chiappetti	IASF Milano, INAF, Italy
Clive G. Page	University of Leicester, UK
Richard Shaw	National Optical Astr. Obs.
Elizabeth Stobie	University of Arizona

Dedicated task forces, 2013-2016

Lucio Chiappetti	IASF Milano, INAF, Italy
Steve Allen	UCO Lick Observatory
Adam Dobrzycki	European Southern Observatory
William D. Pence	NASA Goddard SFC
Arnold Rots	Harvard Smithsonian CfA
Richard Shaw	National Optical Astr. Obs.
William T. Thompson	NASA Goddard SFC

Language editing, 2016-2018

Malcolm J. Currie	Rutherford Appleton Lab, UK
Lucio Chiappetti	IASF Milano, INAF, Italy

2. Definitions, acronyms, and symbols**2.1. Conventions used in this document**

Terms or letters set in **Courier font** represent literal strings that appear in **FITS** files. In the case of keyword names, such as ‘**NAXISn**’, the **lower case** letter represents a positive integer index number, generally in the range 1 to 999. The emphasized words **must**, **shall**, **should**, **may**, **recommended**, and **optional** in this document are to be interpreted as described in IETF standard, RFC 2119 (?).

2.2. Defined terms

⌞ Used to designate an ASCII space character.

ANSI American National Standards Institute.

Array A sequence of data values. This sequence corresponds to the elements in a rectilinear, ***n*-dimension** matrix ($1 \leq n \leq 999$, or $n = 0$ in the case of a null array).

Array value The value of an element of an array in a **FITS** file, without the application of the associated linear transformation to derive the physical value.

ASCII American National Standard Code for Information Interchange.

ASCII character Any member of the **7-bit** ASCII character set.

ASCII digit One of the ten ASCII characters ‘0’ through ‘9’, which are represented by decimal character codes 48 through 57 (hexadecimal 30 through 39).

ASCII NULL The ASCII character that has all eight bits set to zero.

ASCII space The ASCII character for space, which is represented by decimal 32 (hexadecimal 20).

ASCII text The restricted set of ASCII characters decimal 32 through 126 (hexadecimal 20 through 7E).

Basic FITS

Basic FITS The **FITS** structure consisting of the primary header followed by a single primary data array. This is also known as Single Image **FITS** (SIF), as opposed to Multi-Extension **FITS** (MEF) files that contain one or more extensions following the primary HDU.

Big endian The numerical data format used in **FITS** files in which the **most significant** byte of the value is stored first followed by the remaining bytes in order of significance.

Bit A single binary digit.

Byte An ordered sequence of eight consecutive bits treated as a single entity.

Card image An obsolete term for an 80-character keyword record derived from the 80-column punched computer cards that were prevalent in the 1960s and 1970s.

Character string A sequence of one or more of the restricted set of **ASCII text** characters, decimal 32 through 126 (hexadecimal 20 through 7E).

Conforming extension An extension whose keywords and organization adhere to the requirements for conforming extensions defined in Sect. ?? of this **standard**.

Data block A 2880-byte **FITS** block containing data described by the keywords in the associated header of that HDU.

Deprecate To express disapproval of. This term is used to refer to obsolete structures that **should not** be used in new **FITS** files, but which shall remain valid indefinitely.

Entry A single value in an **ASCII table** or **binary table** standard extension.

Extension A **FITS** HDU appearing after the primary HDU in a **FITS** file.

Extension type name The value of the **XTENSION** keyword, used to identify the type of the extension.

Field A component of a larger entity, such as a keyword record or a row of an **ASCII table** or **binary table** standard extension. A field in a **table extension** row consists of a set of **zero or more** table entries collectively described by a single format.

File A sequence of one or more records terminated by an end-of-file indicator appropriate to the medium.

FITS

FITS Flexible Image Transport System.

FITSblock

FITS block A sequence of 2880 **8-bit** bytes aligned on **2880 byte** boundaries in the **FITS** file, most commonly either a header block or a data block. Special records are another infrequently used type of **FITS** block. This block length was chosen because it is evenly divisible by the byte and word lengths of all known computer systems at the time **FITS** was developed in 1979.

FITSfile

FITS file A file with a format that conforms to the specifications in this document.

FITSstructure

FITS structure One of the components of a **FITSFITS** file: the primary HDU, the **random groupsrandom-groups** records, an extension, or, collectively, the special records following the last extension.

FITSSupport Office [The FITSinformation web site](#)

FITS Support Office [The FITS information website](#) that is maintained by the IAUFWG and is currently hosted at <http://fits.gsfc.nasa.gov>.

Floating point A computer representation of a real number.

Fraction The field of the mantissa (or significand) of a floating-point number that lies to the right of its implied binary point.

Group parameter value The value of one of the parameters preceding a group in the **random groups random-groups** structure, without the application of the associated linear transformation.

HDU Header and Data Unit. A data structure consisting of a header and the data the header describes. Note that an HDU **may** consist entirely of a header with no data blocks.

Header A series of keyword records organized within one or more header blocks that describes structures and/or data **which that** follow it in the **FITSFITS** file.

Header block A 2880-byte **FITSFITS** block containing a sequence of thirty-six 80-character keyword records.

Heap The supplemental data area following the main data table in a **binary table binary-table** standard extension.

IAU International Astronomical Union.

IAUFWG International Astronomical Union **FITSFITS** Working Group.

IEEE Institute of Electrical and Electronic Engineers.

IEEE NaN IEEE Not-a-Number value; used to represent undefined floating-point values in **FITSFITS** arrays and binary tables.

IEEE special values Floating-point number byte patterns that have a special, reserved meaning, such as -0 , $\pm\infty$, \pm underflow, \pm overflow, \pm denormalized, \pm NaN. (See Appendix ??).

Indexed keyword A keyword name that is of the form of a fixed root with an appended positive integer index number.

Keyword name The first eight bytes of a keyword record, which contain the ASCII name of a metadata quantity (unless it is blank).

Keyword record An 80-character record in a header block consisting of a keyword name in the first eight characters followed by an **optionaloptional** value indicator, value, and comment string. The keyword record **shall** be composed only of the restricted set of **ASCII text ASCII-text** characters ranging from decimal 32 to 126 (hexadecimal 20 to 7E).

Mandatory keyword A keyword that **must** be used in all **FITSFITS** files or a keyword **required** in conjunction with particular **FITSFITS** structures.

Mantissa Also known as significand. The component of an IEEE floating-point number consisting of an explicit or implicit leading bit to the left of its implied binary point and a fraction field to the right.

MEF Multi-Extension **FITSFITS**, i.e., a **FITSFITS** file containing a primary HDU followed by one or more extension HDUs.

NOST NASA/Science Office of Standards and Technology.

Physical value The value in physical units represented by an element of an array and possibly derived from the array value

using the associated, but **optionaloptional**, linear transformation.

Pixel Short for ‘Picture element’; a single location within an array.

Primary data array The data array contained in the primary HDU.

Primary HDU The first HDU in a **FITSFITS** file.

Primary header The first header in a **FITSFITS** file, containing information on the overall contents of the file (as well as on the primary data array, if present).

Random Group A **FITSFITS** structure consisting of a collection of ‘groups’, where a group consists of a subarray of data and a set of associated parameter values. Random groups are deprecated for any use other than for radio interferometry data.

Record A sequence of bits treated as a single logical entity.

Repeat count The number of values represented in a field in a **binary tablebinary-table** standard extension.

Reserved keyword An **optionalkeyword that mustoptional keyword that must** be used only in the manner defined in this **standardStandard**.

SIF Single Image **FITSFITS**, i.e., a **FITSFITS** file containing only a primary HDU, without any extension HDUs. Also known as Basic **FITSFITS**.

Special records A series of one or more **FITSFITS** blocks following the last HDU whose internal structure does not otherwise conform to that for the primary HDU or to that specified for a conforming extension in this **standardStandard**. Any use of special records requires approval from the IAU **FITSFITS** Working Group.

Standard extension A conforming extension whose header and data content are completely specified in Sect. ?? of this **standardStandard**, namely, an image extension, an **ASCII table ASCII-table** extension, or a **binary table binary-table** extension.

3. **FITSFITS** file organization

3.1. Overall file structure

A **FITSfile shallFITS file shall** be composed of the following **FITSFITS** structures, in the order listed:

- Primary header and data unit (HDU).
- Conforming Extensions (**optionaloptional**).
- Other special records (**optionaloptional**, restricted).

A **FITSFITS** file composed of only the primary HDU is sometimes referred to as a Basic **FITSFITS** file, or a Single Image **FITSFITS** (SIF) file, and a **FITSFITS** file containing one or more extensions following the primary HDU is sometimes referred to as a Multi-Extension **FITSFITS** (MEF) file.

Each **FITSFITS** structure **shall** consist of an integral number of **FITSblocksFITS blocks**, which are each 2880 bytes (23040 bits) in length. The primary HDU **shall** start with the first **FITSFITS** block of the **FITSFITS** file. The first **FITSFITS** block of each subsequent **FITSFITS** structure **shall** be the **FITS** **shall be the FITS** block immediately following the last **FITSFITS** block of the preceding **FITSFITS** structure.

This **standard does not impose Standard neither imposes** a limit on the total size of a **FITSFITS** file, nor **imposes a limit** on the size of an individual HDU within a **FITSFITS** file. Software packages that read or write data according to this **standard**

Standard could be limited, however, in the size of files that are supported. In particular, some software systems have historically only supported files up to 2^{31} bytes in size (approximately 2.1×10^9 bytes).

3.2. Individual FITS Structures

The primary HDU and every extension HDU **shall** consist of one or more 2880-byte header blocks immediately followed by an **optional** sequence of associated 2880-byte data blocks. The header blocks **shall** contain only the restricted set of **ASCII-text** characters, decimal 32 through 126 (hexadecimal 20 through 7E). The ASCII control characters with decimal values less than 32 (including the null, tab, carriage return, and **line feed** characters), and the delete character (decimal 127 or hexadecimal 7F) **must not** appear anywhere within a header block.

3.3. Primary header and data unit

The first component of a **FITS file** **shall** be the primary HDU, which always contains the primary header and **may** be followed by the primary data array. If the primary data array has zero length, as determined by the values of the **NAXIS** and **NAXISn** keywords in the primary header (Sect. ??), then the primary HDU **shall** contain no data blocks.

3.3.1. Primary header

The header of a primary HDU **shall** consist of one or more header blocks, each containing a series of 80-character keyword records containing only the restricted set of **ASCII-text** characters. Each 2880-byte header block contains 36 keyword records. The last header block **must contain the END** keyword (defined in Sect. ??), which marks the logical end of the header. Keyword records without information (e.g., following the **END** keyword) **shall** be filled with ASCII spaces (decimal 32 or hexadecimal 20).

3.3.2. Primary data array

The primary data array, if present, **shall** consist of a single data array with from 1 to 999 dimensions (as specified by the **NAXIS** keyword defined in Sect. ??). The **random groups** convention in the primary data array is a **more complicated** structure and is discussed separately in Sect. ?. The entire array of data values are represented by a continuous stream of bits starting with the first bit of the first data block. Each data value **shall** consist of a fixed number of bits that is determined by the value of the **BITPIX** keyword (Sect. ??). Arrays of more than one dimension **shall** consist of a sequence such that the index along **axis 1** varies most rapidly, that along **axis 2** next most rapidly, and those along subsequent axes progressively less rapidly, with that along **axis m**, where **m** is the value of **NAXIS**, varying least rapidly. There is no space or any other special character between the last value on a row or plane and the first value on the next row or plane of a multi-dimensional array. Except for the location of the first element, the array structure is independent of the **FITS** block structure. This storage order

```
A(1, 1, ..., 1),
A(2, 1, ..., 1),
...
A(NAXIS1, 1, ..., 1),
A(1, 2, ..., 1),
A(2, 2, ..., 1),
...
A(NAXIS1, 2, ..., 1),
...
A(1, NAXIS2, ..., NAXISm),
...
A(NAXIS1, NAXIS2, ..., NAXISm)
```

Fig. 1: Arrays of more than one dimension **shall** consist of a sequence such that the index along **axis 1** varies most rapidly and those along subsequent axes progressively less rapidly.

is shown schematically in Fig. ?? and is the same order as in multi-dimensional arrays in the Fortran programming language (?). The index count along each axis **shall** begin with 1 and increment by 1 up to the value of the **NAXISn** keyword (Sect. ??).

If the data array does not fill the final data block, the remainder of the data block **shall** be filled by setting all bits to zero. The individual data values **shall** be stored in big-endian byte order such that the byte containing the **most significant** bits of the value appears first in the **FITS** file, followed by the remaining bytes, if any, in decreasing order of significance.

3.4. Extensions

3.4.1. Requirements for conforming extensions

All extensions, whether or not further described in this **standard**, **shall** fulfill the following requirements to be in conformance with this **FITS Standard**. New extension types **should** be created only when the organization of the information is such that it cannot be handled by one of the existing extension types. A **FITS** file that contains extensions is commonly referred to as a multi-extension **FITS** (MEF) file.

3.4.1.1. Identity

Each extension type **shall** have a unique type name, specified in the header by the **XTENSION** keyword (Sect. ??). To preclude conflict, extension type names **must** be registered with the IAUFWG. The current list of registered extensions is given in Appendix ?. An up-to-date list is also maintained on the **FITS Support Office web site**.

3.4.1.2. Size specification

The total number of bits in the data of each extension

shall be specified in the header for that extension, in the manner prescribed in Sect. ??.

3.4.2. Standard extensions

A standard extension is a conforming extension whose organization and content are completely specified in Sect. ?? of this standard. Only one extension format shall be approved for each type of data organization.

3.4.3. Order of extensions

An extension may follow the primary HDU or another conforming extension. Standard extensions and other conforming extensions may appear in any order in a FITS file.

3.5. Special records (restricted use)

Special records are 2880-byte FITS blocks following the last HDU of the FITS file that have an unspecified structure that does not meet the requirements of a conforming extension. The first 8 bytes of the special records must not contain the string 'XTENSION'. It is recommended that they do not contain the string 'SIMPLE_'. The contents of special records are not otherwise specified by this standard.

Special records were originally designed as a way for the FITS format to evolve by allowing new FITS structures to be implemented. Following the development of conforming extensions, which provide a general mechanism for storing different types of data structures in FITS format in a well defined manner, the need for other new types of FITS data structures has been greatly reduced. Consequently, further use of special records is restricted and requires the approval of the IAU FITS Working Group.

3.6. Physical blocking

3.6.1. Bitstream devices

For bitstream devices, including but not restricted to logical file systems, FITS files shall be interpreted as a sequence of one or more 2880-byte FITS blocks, regardless of the physical blocking structure of the underlying recording media. When writing a FITS file on media with a physical block size unequal to the 2880-byte FITS block length, any bytes remaining in the last physical block following the end of the FITS file should be set to zero. Similarly, when reading FITS files on such media, any bytes remaining in the last physical block following the end of the FITS file shall be disregarded.

3.6.2. Sequential media

The FITS format was originally developed for writing files on sequential magnetic tape devices. The following rules on how to write to sequential media (?) are now irrelevant to most current data storage devices.

If physically possible, FITS files shall be written on sequential media in blocks that are from one to ten integer multiples of 2880 bytes in length. If this is not possible,

the FITS file shall be written as a bitstream using the native block size of the sequential device. Any bytes remaining in the last block following the end of the FITS file shall be set to zero.

When reading FITS files on sequential media, any files shorter than 2880 bytes in length (e.g., ANSI tape labels) are not considered part of the FITS files and should be disregarded.

3.7. Restrictions on changes

Any structure that is a valid FITS structure shall remain a valid FITS structure at all future times. Use of certain valid FITS structures may be deprecated by this or future FITS Standard documents.

4. Headers

The first two sections of this chapter define the structure and content of header keyword records. This is followed in Sect. ?? with Sect. ?? offers recommendations on how physical units should be expressed. The final section defines the mandatory and reserved keywords for primary arrays and conforming extensions.

4.1. Keyword records

4.1.1. Syntax

Each 80-character header keyword record shall consist of a keyword name, a value indicator (only required if a value is present), an optional value, and an optional comment. Keywords may appear in any order except where specifically stated otherwise in this standard. It is recommended that the order of the keywords in FITS files be preserved during data processing operations because the designers of the FITS file may have used conventions that attach particular significance to the order of certain keywords (e.g., by grouping sequences of COMMENT keywords at specific locations in the header, or appending HISTORY keywords in chronological order of the data processing steps) or using CONTINUE keywords to generate long-string keyword values).

A formal syntax, giving a complete definition of the syntax of FITS keyword records, is given in Appendix ?. It is intended as an aid in interpreting the text defining the standard.

In earlier versions of this standard a FITS keyword, assumed as an item whose value is to be looked up by name (and presumably assigned to a variable) by a FITS reading program, was associated one to one to a single header keyword record. With the introduction of continued (long-string) keywords (see Sect. ??), such FITS keywords may span more than one header keyword record, and the value shall be created by concatenation as explained in Sect. ??.

4.1.2. Components

4.1.2.1. Keyword name (bytes 1 through 8)

The keyword name shall be a left justified, 8-character, space-filled, ASCII string with no embedded spaces. All digits 0 through 9 (decimal ASCII codes 48 to 57, or hexadecimal 30 to 39) and upper case Latin alphabetic characters 'A' through 'Z' (decimal 65 to 90 or hexadecimal 41 to 5A) are permitted; lower case characters shall not be used. The underscore ('_', decimal 95 or hexadecimal 5F) and hyphen ('-', decimal 45 or hexadecimal 2D) are also permitted. No other characters are permitted.³ For indexed keyword names that have a single positive integer index counter appended to the root name, the counter shall not have leading zeroes (e.g., NAXIS1, not NAXIS001). Note that keyword names that begin with (or consist solely of) any combination of hyphens, underscores, and digits are legal.

4.1.2.2. Value indicator (bytes 9 and 10)

If the two ASCII characters '=' (decimal 61 followed by decimal 32) are present in bytes 9 and 10 of the keyword record, this indicates that the keyword has a value field associated with it, unless it is one of the commentary keywords defined in Sect. ?? (i.e., a HISTORY, COMMENT, or completely blank keyword name) which, by definition, have no value.

4.1.2.3. Value/comment (bytes 11 through 80)

In keyword records that contain the value indicator in bytes 9 and 10, the remaining bytes 11 through 80 of the record shall contain the value, if any, of the keyword, followed by optional comments. In keyword records without a value indicator, bytes 9 through 80 should be interpreted as commentary text, however, this does not preclude conventions that interpret the content of these bytes in other ways.

The value field, when present, shall contain the ASCII text representation of a literal string constant, a logical constant, or a numerical constant, in the format specified in Sect. ?. The value field may be a null field; i.e., it may consist entirely of spaces, in which case the value associated with the keyword is undefined.

The mandatory FITS keywords defined in this standard must not appear more than once within a header. All other keywords that have a value should not appear more than once. If a keyword does appear multiple times with different values, then the value is indeterminate.

If a comment follows the value field, it must be preceded by a slash ('/', decimal 47 or hexadecimal 2F).³ A space between the value and the slash is strongly recommended. The comment may contain any of the restricted set of ASCII text characters, decimal 32 through 126 (hexadecimal 20 through 7E). The ASCII control characters with decimal values less than 32 (including the null, tab, carriage return, and line feed characters),

³ This requirement differs from the wording in the original FITS papers. See Appendix H??.

and the delete character (decimal 127 or hexadecimal 7F) must not appear anywhere within a keyword record.

4.2. Value

The structure of the value field depends on the data type of the value. The value field represents a single value and not an array of values.³ The value field must be in one of two formats: fixed or free. The fixed-format is required for values of mandatory keywords and is recommended for values of all other keywords.

4.2.1. Character string

4.2.1.1. Single record string keywords

A character string value shall be composed only of the set of restricted ASCII text characters, decimal 32 through 126 (hexadecimal 20 through 7E) enclosed by single quote characters (''), decimal 39, hexadecimal 27). A single quote is represented within a string as two successive single quotes, e.g., O'HARA = 'O'HARA'. Leading spaces are significant; trailing spaces are not. This standard imposes no requirements on the case sensitivity of character string values unless explicitly stated in the definition of specific keywords.

If the value is a fixed-format character string, the starting single quote character must be in byte 11 of the keyword record and the closing single quote must occur in or before byte 80. Earlier versions of this standard also required that fixed-format character strings must be padded with space characters to at least a length of eight characters so that the closing quote character does not occur before byte 20. This minimum character string length is no longer required, except for the value of the XTENSION keyword (e.g., 'IMAGE_' and 'TABLE_'; see Sect. ??) which must be padded to a length of eight characters for backward compatibility with previous usage.

Free-format character strings follow the same rules as fixed-format character strings except that the starting single quote character may occur after byte 11. Any bytes preceding the starting quote character and after byte 10 must contain the space character.

Note that there is a subtle distinction between the following three keywords: .

```
KEYWORD1= ' ' / null string keyword
KEYWORD2= ' ' / empty string keyword
KEYWORD3= / undefined keyword
```

The value of KEYWORD1 is a null, or zero length string whereas the value of the KEYWORD2 is an empty string (nominally a single space character because the first space in the string is significant, but trailing spaces are not). The value of KEYWORD3 is undefined and has an indeterminate data type as well, except in cases where the data type of the specified keyword is explicitly defined in this standard.

The maximum length of a string value that can be represented on a single keyword record is 68 characters, with the opening and closing quote characters in **bytes** 11 and 80, respectively. In general, no length limit **less fewer** than 68 is implied for character-valued keywords.

Whenever a keyword value is declared ‘string’ or said to ‘contain a character string’, the length limits in this section apply. The next section **??.2** applies when the value is declared ‘long-string’.

??.2 Continued string (long-string) keywords

Earlier versions of this Standard only defined **single record single-record** string keywords as described in the previous section. The Standard now incorporates a convention (originally developed for use in **FITS** files from high-energy astrophysics missions) for continuing arbitrarily long string values over a potentially unlimited sequence of multiple consecutive keyword records using the following procedure: .

1. Divide the **long string long-string** value into a sequence of smaller substrings, each of which **is no longer than 67 characters in length contains fewer than 68 characters**. (Note that if the string contains any literal **single quote single-quote** characters, then these **must must** be represented as a pair of **single quote single-quote** characters in the **FITS keyword FITS-keyword** value, and these two characters **must must** both be contained within a single substring).
2. Append an ampersand character (‘&’ ‘&’) to the end of each substring, except for the last substring. This character serves as a flag to **FITSreading FITS-reading** software that this string value **may may** be continued on the following keyword in the header.
3. Enclose each substring with **single quote single-quote** characters. Non-significant space characters **may may** occur between the ampersand character and the closing quote character.
4. Write the first substring as the value of the specified keyword.
5. Write each subsequent substring, in order, to a series of keywords that all have the reserved keyword name **CONTINUE** (see **CONTINUE** (see Sect. ??) in **bytes** 9 and 10 of the keyword record. The substring **may may** be located anywhere in **bytes** 11 through 80 of the keyword record and **may may** be preceded by non-significant space characters starting in **byte** 11. A comment string **may may** follow the substring; if present, the comment string **must must** be separated from the substring by a **forward slash character** (‘/’ **forward-slash character** (‘/’)). Also, it is **strongly recommended** that the slash character be preceded by a space character.

The **CONTINUE** keyword **must not** **CONTINUE** keyword **must not** be used with any of the mandatory or reserved keywords defined in this **standard** unless explicitly declared of type long-string.

The following keyword records illustrate a string value that is continued over multiple keyword records. (Note: the length of the substrings have been reduced to fit within the page layout: .)

```
WEATHER = 'Partly cloudy during the evening f&'
CONTINUE 'ollowed by cloudy skies overnight.&'
CONTINUE ' Low 21C. Winds NNE at 5 to 10 mph.'
```

If needed, additional space for the keyword comment field can be generated by continuing the string value with one or more null strings, as illustrated schematically below: .

```
STRKEY = 'This keyword value is continued &'
CONTINUE ' over multiple keyword records.&'
CONTINUE '&' / The comment field for this
CONTINUE '&' / keyword is also continued
CONTINUE '' / over multiple records.
```

FITSreading FITS-reading software can reconstruct the **long string long-string** value by following an inverse procedure of checking if the string value ends with the ‘&’ ‘&’ character and is immediately followed by a conforming **CONTINUE** keyword record. If both conditions are true, then concatenate the substring from the **CONTINUE** record onto the previous substring after first deleting the trailing ‘&’ ‘&’ character. Repeat these steps until all subsequent **CONTINUE** records have been processed.

Note that if a string value ends with the ‘&’ ‘&’ character, but is not immediately followed by a **CONTINUE** keyword that conforms to all the previously described requirements, then the ‘&’ character **should** be interpreted as the literal last character in the string. Also, any ‘orphaned’ **CONTINUE** keyword records (formally not invalidating the **FITS** file, although likely representing an error with respect to what the author of the file meant) **should should** be interpreted as containing commentary text in **bytes** 9–80 (similar to a **COMMENT** keyword).

4.2.2. Logical

If the value is a fixed-format logical constant, it **shall** appear as an **uppercase** **T** or **F** in **byte** 30. A logical value is represented in free-format by a single character consisting of an **uppercase** **T** or **F** as the first non-space character in **bytes** 11 through 80.

4.2.3. Integer number

If the value is a fixed-format integer, the ASCII representation **shall** be right-justified in **bytes** 11 through 30. An integer consists of a ‘+’ ‘+’ (decimal 43 or hexadecimal 2B) or ‘-’ ‘-’ (decimal 45 or hexadecimal 2D) sign, followed by one or more contiguous ASCII digits (decimal 48 to 57 or hexadecimal 30 to 39), with no embedded spaces. The leading ‘+’ ‘+’ sign is **optional**. Leading zeros are permitted, but are not significant. The integer representation **shall** always be interpreted as a signed, decimal number. This **standard** does not limit the range of an integer keyword value, however, software packages that read or write data according to this **standard** could be limited in the range of values that are supported (e.g., to the range that can be represented by a 32-bit or 64-bit signed binary integer).

A free-format integer value follows the same rules as fixed-format integers except that the ASCII representation **may may** occur anywhere within **bytes** 11 through 80.

4.2.4. Real floating-point number

If the value is a fixed-format real floating-point number, the ASCII representation *shall* be right-justified in [bytes](#) 11 through 30.

A floating-point number is represented by a decimal number followed by an *optional* exponent, with no embedded spaces. A decimal number *shall* consist of a '+' (decimal 43 or hexadecimal 2B) or '-' (decimal 45 or hexadecimal 2D) sign, followed by a sequence of ASCII digits containing a single decimal point ('.'), representing an integer part and a fractional part of the floating-point number. The leading '+' sign is *optional*. At least one of the integer part or fractional part *must* be present. If the fractional part is present, the decimal point *must* also be present. If only the integer part is present, the decimal point *may* be omitted, in which case the floating-point number is indistinguishable from an integer. The exponent, if present, consists of an exponent letter followed by an integer. Letters in the exponential form ('E' or 'D')⁴ *shall* be upper case. The full precision of 64-bit values cannot be expressed over the whole range of values using the fixed-format. This *standard does not impose* *Standard* *neither imposes* an upper limit on the number of digits of precision, nor any limit on the range of floating-point keyword values. Software packages that read or write data according to this *standard* *Standard* could be limited, however, in the range of values and exponents that are supported (e.g., to the range that can be represented by a 32-bit or 64-bit floating-point number).

A free-format floating-point value follows the same rules as a fixed-format floating-point value except that the ASCII representation *may* occur anywhere within [bytes](#) 11 through 80.

4.2.5. Complex integer number

There is no fixed-format for complex integer numbers.⁵

If the value is a complex integer number, the value *must* be represented as a real part and an imaginary part, separated by a comma and enclosed in parentheses e.g., (123, 45). *Spaces may* (123, 45). *Spaces may* precede and follow the real and imaginary parts. The real and imaginary parts are represented in the same way as integers (Sect. ??). Such a representation is regarded as a single value for the complex integer number. This representation *may* be located anywhere within [bytes](#) 11 through 80.

4.2.6. Complex floating-point number

There is no fixed-format for complex floating-point numbers.⁵

If the value is a complex floating-point number, the value *must* be represented as a real part and an imaginary part, separated by a comma and enclosed in parentheses, e.g., (123.23, -45.7). *Spaces may* (123.23, -45.7). *Spaces may* precede and follow the real and imaginary parts. The real and imaginary parts

⁴ The 'D' exponent form is traditionally used when representing values that have more decimals of precision or a larger magnitude than can be represented by a *single precision* 32-bit floating-point number, but otherwise there is no distinction between 'E' or 'D'.

⁵ This requirement differs from the wording in the original *FITS* papers. See Appendix H??.

Table 3: IAU-recommended basic units.

Quantity	Unit	Meaning	Notes
<i>SI base & supplementary units</i>			
length	m	meter	
mass	kg	kilogram	g gram allowed
time	s	second	
plane angle	rad	radian	
solid angle	sr	steradian	
temperature	K	kelvin	
electric current	A	ampere	
amount of substance	mol	mole	
luminous intensity	cd	candela	
<i>IAU-recognized derived units</i>			
frequency	Hz	hertz	s ⁻¹
energy	J	joule	N m
power	W	watt	J s ⁻¹
electric potential	V	volt	J C ⁻¹
force	N	newton	kg m s ⁻²
pressure, stress	Pa	pascal	N m ⁻²
electric charge	C	coulomb	A s
electric resistance	Ohm	ohm	V A ⁻¹
electric conductance	S	siemens	A V ⁻¹
electric capacitance	F	farad	C V ⁻¹
magnetic flux	Wb	weber	V s
magnetic flux density	T	tesla	Wb m ⁻²
inductance	H	henry	Wb A ⁻¹
luminous flux	lm	lumen	cd sr
illuminance	lx	lux	lm m ⁻²

are represented in the same way as floating-point values (Sect. ??). Such a representation is regarded as a single value for the complex floating-point number. This representation *may* be located anywhere within [bytes](#) 11 through 80.

4.2.7. Date

There is strictly no such thing as a data type for *date valued* keywords, however a pseudo data type of *datetime* is defined in Sect. ?? and *must* be used to write ISO-8601 *datetime* strings as character strings.

If a keyword needs to express a *time* in JD or MJD (see Sect. ??), this can be formatted as an arbitrary precision number, optionally separating the integer and fractional part as specified in Sect. ??.

4.3. Units

When a numerical keyword value represents a physical quantity, it is *recommended* that units be provided. Units *shall be* represented with a string of characters composed of the restricted *ASCII text* character set. Unit strings can be used as values of keywords (e.g., for the reserved keywords *BUNIT*, and *TUNITn*), as an entry in a *character string* column of an *ASCII or binary table* extension, or as part of a keyword comment string (see Sect. ??, below).

The units of all *FITS* header keyword values, with the exception of measurements of angles, *should* conform with the recommendations in the IAU Style Manual (?). For angular measurements given as floating-point values and specified with reserved keywords, the units *should* be degrees (i.e.,

Table 4: Additional allowed units.

Quantity	Unit	Meaning	Notes
plane angle	deg	degree of arc	$\pi/180$ rad
	arcmin	minute of arc	1/60 deg
time	arcsec	second of arc	1/3600 deg
	mas	milli-second of arc	1/3 600 000 deg
	min	minute	60 s
	h	hour	60 min = 3600 s
	d	day	86 400 s
	† a	year (Julian)	31 557 600 s (365.25 d), peta a(Pa) forbidden
	† yr	year (Julian)	a is IAU-style
energy*	† eV	electron volt	1.6021765 × 10 ⁻¹⁹ J
	‡ erg	erg	10 ⁻⁷ J
mass*	Ry	rydberg	$\frac{1}{2} \left(\frac{2\pi e^2}{hc} \right)^2 m_e c^2 = 13.605692$ eV
	solMass	solar mass	1.9891 × 10 ³⁰ kg
luminosity	u	unified atomic mass unit	1.6605387 × 10 ⁻²⁷ kg
	solLum	Solar luminosity	3.8268 × 10 ²⁶ W
length	‡ Angstrom	angstrom	10 ⁻¹⁰ m
	solRad	Solar radius	6.9599 × 10 ⁸ m
	AU	astronomical unit	1.49598 × 10 ¹¹ m
	lyr	light year	9.460730 × 10 ¹⁵ m
events	† pc	parsec	3.0857 × 10 ¹⁶ m
	count	count	
	ct	count	
flux density	photon	photon	
	ph	photon	
	† Jy	jansky	10 ⁻²⁶ W m ⁻² Hz ⁻¹
magnetic field area	† mag	(stellar) magnitude	
	† R	rayleigh	10 ¹⁰ /(4π) photons m ⁻² s ⁻¹ sr ⁻¹
	†‡ G	gauss	10 ⁻⁴ T
Miscellaneous units	pixel	(image/detector) pixel	
	pix	(image/detector) pixel	
	†‡ barn	barn	10 ⁻²⁸ m ²
	D	debye	$\frac{1}{3} \times 10^{-29}$ C.m
Sun	relative to Sun	e.g., abundances	
chan	(detector) channel		
bin	numerous applications	(including the 1-d analogue one-dimensional analog of pixel)	
voxel	3-d analogue three-dimensional analog of pixel		
† bit	binary information unit		
† byte	(computer) byte	8 bit eight bits	
adu	Analog-to-digital converter		
beam	beam area of observation	as in Jy/beam	

Notes. (†)Addition of prefixes for decimal multiples and submultiples are allowed. (‡)Deprecated in IAU Style Manual (?) but still in use. (*)Conversion factors from CODATA Internationally recommended values of the fundamental physical constants 2002 (<http://physics.nist.gov/cuu/Constants/>).

degdeg). If a requirement exists within this standard Standard for the units of a keyword, then those units must must be used.

The units for fundamental physical quantities recommended by the IAU are given in Table ??, and . Table ?? lists additional units that are commonly used in astronomy are given in Table ??. Further specifications for time units are given in Sect. ?. The recommended plain text plain-text form for the IAU-recognized base units are given in columnColumn 2 of both tables.⁶ All base units strings may may be preceded, with no intervening spaces, by a single character (two for deca) taken from Table ?? and representing scale factors mostly in steps of 10³. Compound prefixes (e.g., ZYeV ZYeV for 10⁴⁵ eV) must not must not be used.

⁶ These tables are reproduced from the first in a series of papers on world coordinate world-coordinate systems (?), which provides examples and expanded discussion.

4.3.1. Construction of units strings

Compound units strings may may be formed by combining strings of base units (including prefixes, if any) with the recommended syntax described in Table ??. Two or more base units strings (called str1 and str2 in Table ??) may may be combined using the restricted set of (explicit or implicit) operators that provide for multiplication, division, exponentiation, raising arguments to powers, or taking the logarithm or square-root of an argument. Note that functions such as logLog actually require dimensionless arguments, so that log(Hz)log(Hz), for example, actually means log(x/1 Hz)log(x/1 Hz). The final units string is the compound string, or a compound of compounds, preceded by an optional optional numeric multiplier of the form 10**k, 10^k, or 1010**k, 10^k, or 10±k where kk is an integer, optionally surrounded by parentheses with the sign

character **required** *required* in the third form in the absence of parentheses. Creators of **FITS** files are encouraged to use the numeric multiplier only when the available standard scale factors of Table ?? will not suffice. Parentheses are used for symbol grouping and are strongly **recommended** *recommended* whenever the order of operations might be subject to misinterpretation. A space character implies multiplication, which can also be conveyed explicitly with an asterisk or a period. Therefore, although spaces are allowed as symbol separators, their use is discouraged. Note that, per IAU convention, case is significant throughout. The IAU style manual forbids the use of more than one slash ('/' '/') character in a units string. However, since normal mathematical precedence rules apply in this context, more than one slash **may** be used but is discouraged.

A unit raised to a power is indicated by the unit string followed, with no intervening spaces, by the **optional** *optional* symbols ** or ^ followed by the power given as a numeric expression, called **expr** in Table ?. The power **may** be a simple integer, with or without sign, *optionally* surrounded by parentheses. It **may** also be a decimal number (e.g., 1.5, 0.515, 0.5) or a ratio of two integers (e.g., 7/97/9), with or without sign, which **must** be surrounded by parentheses. Thus meters squared **may** be indicated by **m**(2)**, **m**+2**, **m+2**, **m2**, **m^2**, **m^(+2)**, **m**(2)**, **m**+2**, **m+2**, **m2**, **m^2**, **m^(+2)**, etc. and per meter cubed **may** be indicated by **m**(-3)**, **m-3**, **m^(-3)**, **/m3**, **m**(-3)**, **m-3**, **m^(-3)**, **/m3**, and so forth. Meters to the three-halves power **may** be indicated by **m(1.5)**, **m^(1.5)**, **m**(1.5)**, **m(3/2)**, **m**(3/2)**, and **m^(3/2)**, but **not** by **m^3/2** or **m1.5m(1.5)**, **m^(1.5)**, **m**(1.5)**, **m(3/2)**, **m**(3/2)**, and **m^(3/2)**, but **not** by **ms/2** or **m1.5**.

4.3.2. Units in comment fields

If the units of the keyword value are specified in the comment of the header keyword, it is **recommended** *recommended* that the units string be enclosed in square brackets (i.e., enclosed by '[' and ']') at the beginning of the comment field, separated from the slash ('/' '/') comment field delimiter by a single space character. An example, using a non-standard keyword, is **EXPTIME = 1200. / sexposure time in seconds** **EXPTIME = 1200. / [s] exposure time in seconds**

This widespread, but **optional** *optional*, practice suggests that square brackets **should** be used in comment fields only for this purpose. Nonetheless, software **should not** depend on units being expressed in this fashion within a keyword comment, and software **should not** depend on any string within square brackets in a comment field containing a proper units string.

4.4. Keywords

4.4.1. Mandatory keywords

Mandatory keywords are **required** *required* in every HDU as described in the remainder of this subsection. They **must** be used only as described in this **standard** *Standard*. Values of the mandatory keywords **must** be written in fixed-format.

4.4.1.1. Primary header

The **SIMPLESIMPLE** keyword is **required** *required* to be

Table 5: Prefixes for multiples and submultiples.

Submult	Prefix	Char	Mult	Prefix	Char
10 ⁻¹	deci	d	10	deca	da
10 ⁻²	centi	c	10 ²	hecto	h
10 ⁻³	milli	m	10 ³	kilo	k
10 ⁻⁶	micro	u	10 ⁶	mega	M
10 ⁻⁹	nano	n	10 ⁹	giga	G
10 ⁻¹²	pico	p	10 ¹²	tera	T
10 ⁻¹⁵	femto	f	10 ¹⁵	peta	P
10 ⁻¹⁸	atto	a	10 ¹⁸	exa	E
10 ⁻²¹	zepto	z	10 ²¹	zetta	Z
10 ⁻²⁴	yocto	y	10 ²⁴	yotta	Y

Table 6: Characters and strings allowed to denote mathematical operations.

String	Meaning
str1 str2	Multiplication
str1*str2	Multiplication
str1.str2	Multiplication
str1/str2	Division
str1**expr	Raised to the power expr
str1^expr	Raised to the power expr
str1expr	Raised to the power expr
log(str1)	Common Logarithm (to base 10)
ln(str1)	Natural Logarithm
exp(str1)	Exponential (e ^{str1})
sqrt(str1)	Square root

Table 7: Mandatory keywords for primary header.

#	Position	Keyword
1		SIMPLESIMPLE = TT
2		BITPIXBITPIX
3		NAXISNAXIS
4		NAXISn, nNAXISn, n = 1, ..., NAXISNAXIS
		:
		(other keywords)
		:
		:
	last	ENDEND

Table 8: Interpretation of valid **BITPIX** value.

Value	Data represented
8 8	Character or unsigned binary integer
16 16	16-bit two's complement binary integer
32 32	32-bit two's complement binary integer
64 64	64-bit two's complement binary integer
-32 -32	IEEE single precision <i>single-precision</i> floating point
-64 -64	IEEE double precision <i>double-precision</i> floating point

the first keyword in the primary header of all **FITS** files. The primary header **must** contain the other mandatory keywords shown in Table ?? in the order given. Other keywords **must not** intervene between the **SIMPLESIMPLE** keyword and the last **NAXISnNAXISn** keyword.

SIMPLESIMPLE keyword. The value field *shall* contain a logical constant with the value **TT** if the file conforms to this **standard**. This keyword is mandatory for the primary header and **must not** appear in extension headers.⁷ A value of **FF** signifies that the file does not conform to this **standard**.

BITPIX keyword. The value field *shall* contain an integer. The absolute value is used in computing the sizes of data structures. It *shall* specify the number of bits that represent a data value in the associated data array. The only valid values of **BITPIX** are given in Table ???. Writers of **FITS** arrays should select a **BITPIX** type appropriate to the form, range of values, and accuracy of the data in the array.

NAXIS keyword. The value field *shall* contain a non-negative integer no greater than 999 representing the number of axes in the associated data array. A value of zero signifies that no data follow the header in the HDU.

NAXISn keywords. The **NAXISn** keywords *must* be present for all values $n = 1, \dots, \text{NAXIS}$, in increasing order of n , and for no other values of n . The value field of this indexed keyword *shall* contain a non-negative integer representing the number of elements along axis n of a data array. A value of zero for any of the **NAXISn** signifies that no data follow the header in the HDU (however, the **random groups** structure described in Sect. ??? has **NAXIS1** = 0, but will have data following the header if the other **NAXISn** keywords are non-zero). If **NAXIS** is equal to 0, there shall not be any **NAXISn** keywords.

ENDEND keyword. This keyword has no associated value. Bytes 9 through 80 *shall* be filled with ASCII spaces (decimal 32 or hexadecimal 20). The **ENDEND** keyword marks the logical end of the header and *must* occur in the last 2880-byte **FITS** block of the header.

The total number of bits in the primary data array, exclusive of fill that is needed after the data to complete the last 2880-byte data block (Sect. ???), is given by the following expression:

$$N_{\text{bits}} = |\text{BITPIX}| \times (\text{NAXIS1} \times \text{NAXIS2} \times \dots \times \text{NAXIS}(\text{NAXIS}))$$

where N_{bits} *must* be non-negative and is the number of bits excluding fill; mm is the value of **NAXIS**, and **BITPIX** and the **NAXISn** represent the values associated with those keywords. Note that the **random groups** convention in the primary array has a **more complicated** structure whose size is given by Eq. ???. The header of the first **FITS** extension in the file, if present, *shall* start with the first **FITS** block following the data block that contains the last bit of the primary data array.

⁷ This requirement differs from the wording in the original **FITS** papers. See Appendix H??.

An example of a primary array header is shown in Table ???. In addition to the required keywords, it includes a few of the reserved keywords that are discussed in Sect. ???.

4.4.1.2. Conforming extensions

All conforming extensions, whether or not further specified in this **standard**, *must* use the keywords defined in Table ??? in the order specified. Other keywords **must not** intervene between the **XTENSION** keyword and the **GCOUNT** keyword. The **BITPIX**, **NAXIS**, **NAXISn**, and **END** keywords are defined in Sect. ???.

XTENSION keyword. The value field *shall* contain a character string giving the name of the extension type. This keyword is mandatory for an extension header and **must not** appear in the primary header.⁸ To preclude conflict, extension type names *must* be registered with the IAUFWG. The current list of registered extensions is given in Appendix ???. An up-to-date list is also maintained on the **FITS Support Office web site**.

PCOUNT keyword. The value field *shall* contain an integer that *shall* be used in any way appropriate to define the data structure, consistent with Eq. ???. In **IMAGE** (Sect. ???) and **TABLE** (Sect. ???) extensions this keyword *must* have the value 0; in **BINTABLE** extensions (Sect. ???) it is used to specify the number of bytes that follow the main data table in the supplemental data area called the heap. This keyword is also used in the **random groups** structure (Sect. ???) to specify the number of parameters preceding each array in a group.

GCOUNT keyword. The value field *shall* contain an integer that *shall* be used in any way appropriate to define the data structure, consistent with Eq. ???. This keyword *must* have the value 1 in the **IMAGE**, **TABLE**, and **BINTABLE** standard extensions defined in Sect. ???. This keyword is also used in the **random groups** structure (Sect. ???) to specify the number of random groups present.

The total number of bits in the extension data array (exclusive of fill that is needed after the data to complete the last 2880-byte data block) is given by the following expression:

$$N_{\text{bits}} = |\text{BITPIX}| \times \text{GCOUNT} \times (\text{PCOUNT} + \text{NAXIS1} \times \text{NAXIS2} \times \dots)$$

where N_{bits} *must* be non-negative and is the number of bits excluding fill; mm is the value of **NAXIS**; and **BITPIX**, **GCOUNT**, **PCOUNT**, and the **NAXISn** represent the values associated with those keywords. If $N_{\text{bits}} > 0$, then the data array *shall* be contained in an integral number of 2880-byte **FITS** data blocks. The header of the next **FITS** extension in the file, if any, *shall* start with the first **FITS** block following the

⁸ This requirement differs from the wording in the original **FITS** papers. See Appendix H.

Table 9: Example of a primary array header.

Keyword records	
SIMPLE =	T / file does conform to FITS standard
BITPIX =	16 / number of bits per data pixel
NAXIS =	2 / number of data axes
NAXIS1 =	250 / length of data axis 1
NAXIS2 =	300 / length of data axis 2
OBJECT =	'Cygnus X-1'
DATE =	'2006-10-22'
END	

data block that contains the last bit of the current extension data array.

4.4.2. Other reserved keywords

The reserved keywords described below are *optional*, but if present in the header they *must* be used only as defined in this *standard*. They apply to any *FITS* structure with the meanings and restrictions defined below. Any *FITS* structure may further restrict the use of these keywords.

4.4.2.1. General descriptive keywords

DATE keyword. The value field shall contain a character string giving the date on which the HDU was created, in the form *YYYY-MM-DD*, or the date and time when the HDU was created, in the form *YYYY-MM-DDThh:mm:ss.sss...*, where *YYYY* shall be the four-digit calendar year number, *MM* the two-digit month number with January given by 01 and December by 12, and *DD* the two-digit day of the month. When both date and time are given, the literal *T* shall separate the date and time, *hh* shall be the two-digit hour in the day, *mm* the two-digit number of minutes after the hour, and *ss.sss...ss* the number of seconds (two digits followed by an *optional* fraction) after the minute. Default values *must not* be given to any portion of the date/time string, and leading zeros *must not* be omitted. The decimal part of the seconds field is *optional* and may be arbitrarily long, so long as it is consistent with the rules for value formats of Sect. ???. Otherwise said, the format for **DATE** keywords written after January 1, 2000 shall be the ISO-8601 *datetime* form described in Sect. ???. See also Sect. ??.

The value of the **DATE** keyword shall always be expressed in UTC when in this format, for all data sets created on Earth.

The following format may appear on files written before January 1, 2000. The value field contains a character string giving the date on which the HDU was created, in the form *DD/MM/YY*, where *DD* is the day of the month, *MM* the month number with January given by 01 and December by 12, and *YY* the last two digits of the year, the first two digits being understood to be 19. Specification of the date using Universal Time is *recommended* but not assumed.

Table 10: Mandatory keywords in conforming extensions.

#	Position	Keyword
1		XTENSION
2		BITPIX
3		NAXIS
4		NAXISn , $n = 1, \dots$
5		PCOUNT
6		GCOUNT
		⋮
		(other keywords)
		⋮
	last	END

When a newly created HDU is substantially a verbatim copy of another HDU, the value of the **DATE** keyword in the original HDU may be retained in the new HDU instead of updating the value to the current date and time.

ORIGIN keyword. The value field shall contain a character string identifying the organization or institution responsible for creating the *FITS* file.

EXTEND keyword. The value field shall contain a logical value indicating whether the *FITS* file is allowed to contain conforming extensions following the primary HDU. This keyword may only appear in the primary header and *must not* appear in an extension header. If the value field is *T* then there may be conforming extensions in the *FITS* file following the primary HDU. This keyword is only advisory, so its presence with a value *TT* does not require that the *FITS* file contains extensions, nor does the absence of this keyword necessarily imply that the file does not contain extensions. Earlier versions of this *standard* stated that the **EXTEND** keyword *must* be present in the primary header if the file contained extensions, but this is no longer *required*.

BLOCKED keyword. This keyword is deprecated and *should not* be used in new *FITS* files. It is reserved primarily to prevent its use with other meanings. As previously defined, this keyword, if used, was *required* to appear only within the first 36 keywords in the primary header. Its presence with the *required* logical value of *TT* advised that the physical block size of the *FITS* file on which it appears may be an integral multiple of the *FITS* block length and not necessarily equal to it.

4.4.2.2. Keywords describing observations

DATE-OBS keyword. The format of the value field for **DATE-OBS** keywords shall follow the prescriptions for the **DATE** keyword (Sect. ?? and Sect. ??). Either the four-digit year format or the two-digit year format may be used for observation dates from 1900 through 1999, although the four-digit format is recommended.

When the format with a four-digit year is used, the default interpretations for time should be UTC for dates beginning 1972-01-01 and UT before. Other date and time scales are permissible. The value of the **DATE-OBS** keyword shall be expressed in the principal time system or time scale of the HDU to which it belongs; if there is any chance of ambiguity, the choice should be clarified in comments. The value of **DATE-OBS** shall be assumed to refer to the start of an observation, unless another interpretation is clearly explained in the comment field. Explicit specification of the time scale is recommended. By default, times for TAI and times that run simultaneously with TAI, e.g., UTC and TT, will be assumed to be as measured at the detector (or, in practical cases, at the observatory). For coordinate times such as TCG, TCB, and TDB, the default shall be to include light-time corrections to the associated spatial origin, namely the geocenter for TCG and the solar-system Solar System barycenter for the other two. Conventions may be developed that use other time systems. Time scales are now discussed in detail in Sect. ?? and Table ??.

When the value of **DATE-OBS** is expressed in the two-digit year form, allowed for files written before January 1, 2000 with a year in the range 1900-1999, there is no default assumption as to whether it refers to the start, middle or end of an observation.

DATE keywords. The value fields for all keywords beginning with the string **DATE** whose value contains date, and optionally time, information shall follow the prescriptions for the **DATE-OBS** keyword. See also Sect. ?? for the *datetime* format, and Sect. ?? for further global time keywords specified by the Standard.

TELESCOP keyword. The value field shall contain a character string identifying the telescope used to acquire the data associated with the header.

INSTRUME keyword. The value field shall contain a character string identifying the instrument used to acquire the data associated with the header.

OBSERVER keyword. The value field shall contain a character string identifying who acquired the data associated with the header.

OBJECT keyword. The value field shall contain a character string giving a name for the object observed.

4.4.2.3. Bibliographic keywords

AUTHOR keyword. The value field shall contain a character string identifying who compiled the information in the data associated with the header. This keyword is appropriate when the data originate in a published paper or are compiled from many sources.

REFERENC keyword. The value field shall contain a character string citing a reference where the data associated with the header are published. It is recommended that either the 19-digit bibliographic identifier⁸ used in the Astrophysics Data System bibliographic databases (<http://adswww.harvard.edu/>) or the Digital Object Identifier (<http://doi.org>) be included in the value string, when available (e.g., '1994A&AS..103..135A' or 'doi:10.1006/jmbi.1998.2354' '1994A&AS..103..135A' or 'doi:10.1006/jmbi.1998.2354').

4.4.2.4. Commentary keywords

These keywords provide commentary information about the contents or history of the **FITS** file and may occur any number of times in a header. These keywords shall have no associated value even if the value indicator characters '=' appear in bytes 9 and 10 (hence it is recommended that these keywords not contain the value indicator). Bytes 9 through 80 may contain any of the restricted set of ASCII-text characters, decimal 32 through 126 (hexadecimal 20 through 7E).

In earlier versions of this standard continued string keywords (see Sect. ??2) could be handled as commentary keywords if the relevant convention was not supported. Now **CONTINUE** keywords shall be honoured as specified in Section Sect. ??2.

COMMENT keyword. This keyword may be used to supply any comments regarding the **FITS** file.

HISTORY keyword. This keyword should be used to describe the history of steps and procedures associated with the processing of the associated data.

Keyword field is blank. This keyword may be used to supply any comments regarding the **FITS** file. It is frequently used for aesthetic purposes to provide a break between groups of related keywords in the header.

A sequence of one or more entirely blank keyword records (consisting of 80 ASCII space characters) that immediately precede the **END** keyword may be interpreted as non-significant fill space that may be overwritten when new keywords are appended to the header. This usage convention enables an arbitrarily large amount of header space to be preallocated when the **FITS** HDU is first created, which can help mitigate the potentially time-consuming alternative of having to

⁸ This bibliographic convention (?) was initially developed for use within NED (NASA/IPAC Extragalactic Database) and SIMBAD (operated at CDS, Strasbourg, France).

shift all the following data in the file by 2880 bytes to make room for a new **FITS** header block each time space is needed for a new keyword.

4.4.2.5. Keywords that describe arrays

These keywords are used to describe the contents of an array, either in the primary array, in an **image** **IMAGE** extension (Sect. ??), or in a series of random groups (Sect. ??). They are **optional**, but if they appear in the header describing an array or groups, they **must** be used as defined in this section of this **standard**. They shall not be used in headers describing other structures unless the meaning is the same as defined here.

BSCALE keyword. This keyword shall be used, along with the **BZERO** keyword, to linearly scale the array pixel values (i.e., the actual values stored in the **FITS** file) to transform them into the physical values that they represent using Eq. ??.

$$\text{physical_value} = \text{BZERO} + \text{BSCALE} \times \text{array_val}(i)$$

The value field shall contain a floating-point number representing the coefficient of the linear term in the scaling equation, the ratio of physical value to array value at zero offset. The default value for this keyword is 1.0. Before support for IEEE floating-point data types was added to **FITS** (?), this technique of linearly scaling integer values was the only way to represent the full range of floating-point values in a **FITS** array. This linear scaling technique is still commonly used to reduce the size of the data array by a factor of two by representing 32-bit floating-point physical values as 16-bit scaled integers.

BZERO keyword. This keyword shall be used, along with the **BSCALE** keyword, to linearly scale the array pixel values (i.e., the actual values stored in the **FITS** file) to transform them into the physical values that they represent using Eq. ?. The value field shall contain a floating-point number representing the physical value corresponding to an array value of zero. The default value for this keyword is 0.0.

Besides its use in representing floating-point values as scaled integers (see the description of the **BSCALE** keyword), the **BZERO** keyword is also used when storing **unsigned integer** values in the **FITS** array. In this special case the **BSCALE** keyword shall have the default value of 1.0, and the **BZERO** keyword shall have one of the integer values shown in Table ??.

Since the **FITS** format does not support a native unsigned integer data type (except for the unsigned 8-bit byte data type), the unsigned values are stored in the **FITS** array as native signed integers with the appropriate integer offset specified by the **BZERO** keyword value shown in the table. For the byte data type, the converse technique can be used to store signed byte values as native unsigned values with the negative **BZERO** offset. In each case, the physical value is computed by adding the offset specified by the **BZERO**

keyword to the native data type value that is stored in the **FITS** file.⁹

BUNIT keyword. The value field shall contain a character string describing the physical units in which the quantities in the array, after application of **BSCALE** and **BZERO**, are expressed. These units must follow the prescriptions of Sect. ??.

BLANK keyword. This keyword shall be used only in headers with positive values of **BITPIX** (i.e., in arrays with integer data). Bytes 1 through 8 contain the string 'BLANK' (ASCII spaces in bytes 6 through 8). The value field shall contain an integer that specifies the value that is used within the integer array to represent pixels that have an undefined physical value.

If the **BSCALE** and **BZERO** keywords do not have the default values of 1.0 and 0.0, respectively, then the value of the **BLANK** keyword must equal the actual value in the **FITS** data array that is used to represent an undefined pixel and not the corresponding physical value (computed from Eq. ??). To cite a specific, common example, **unsigned** 16-bit integers are represented in a **signed** integer **FITS** array (with **BITPIX** = 16) by setting **BZERO** = -32768 and **BSCALE** = 1. If it is desired to use pixels that have an **unsigned** value (i.e., the physical value) equal to 0 to represent undefined pixels in the array, then the **BLANK** keyword must be set to the value -32768 because that is the actual value of the undefined pixels in the **FITS** array.

DATAMAX keyword. The value field shall always contain a floating-point number, regardless of the value of **BITPIX**. This number shall give the maximum valid physical value represented by the array (from Eq. ??), exclusive of any IEEE special values.

DATAMIN keyword. The value field shall always contain a floating-point number, regardless of the value of **BITPIX**. This number shall give the minimum valid physical value represented by the array (from Eq. ??), exclusive of any IEEE special values.

WCS keywords. An extensive set of keywords have been defined to describe the world coordinates associated with an array. These keywords are discussed separately in Sect. ??.

4.4.2.6. Extension keywords

The next three keywords were originally defined for use

⁹ A more computationally efficient method of adding or subtracting the **BZERO** values is to simply flip the **most significant** bit of the binary value. For example, using 8-bit integers, the decimal value 248 minus the **BZERO** value of 128 equals 120. The binary representation of 248 is 11111000. Flipping the **most significant** bit gives the binary value 01111000, which is equal to decimal 120.

Table 11: Usage of **BZERO** to represent non-default integer data types.

BITPIX	Native data type	Physical data type	BZERO
8	unsigned	signed byte	-128-128 (-2 ⁷)
16	signed	unsigned 16-bit	32768-32768 (2 ¹⁵)
32	signed	unsigned 32-bit	2147483648-2147483648 (2 ³¹)
64	signed	unsigned 64-bit	9223372036854775808-9223372036854775808 (2 ⁶³)

within the header of a conforming extension, however they also *may* appear in the primary header with an analogous meaning. If these keywords are present, it is *recommended* that they have a unique combination of values in each HDU of the **FITS** file.

EXTNAME keyword. The value field *shall* contain a character string to be used to distinguish among different extensions of the same type, i.e., with the same value of **XTENSION**, in a **FITS** file. Within this context, the primary array *should* be considered as equivalent to an **IMAGE** extension.

EXTVER keyword. The value field *shall* contain an integer to be used to distinguish among different extensions in a **FITS** file with the same type and name, i.e., the same values for **XTENSION** and **EXTNAME**. The values need not start with 1 for the first extension with a particular value of **EXTNAME** and need not be in sequence for subsequent values. If the **EXTVER** keyword is absent, the file *should* be treated as if the value were 1.

EXTLEVEL keyword. The value field *shall* contain an integer specifying the level in a hierarchy of extension levels of the extension header containing it. The value *shall be* 1 for the highest level; levels with a higher value of this keyword *shall* be subordinate to levels with a lower value. If the **EXTLEVEL** keyword is absent, the file *should* be treated as if the value were 1.

The following keyword is *optional*, but is *reserved* for use by the convention described in Appendix ???. If present it *shall* appear in the extension header immediately after the mandatory keywords, and be used as described in the **Appendix**.

INHERIT keyword. The value field *shall* contain a logical value of **Tor FT or F** to indicate whether or not the current extension should inherit the keywords in the primary header of the **FITS** file.

???.7 **Data Integrity Keywords**

The two keywords described here provide an integrity check on the information contained in **FITS** HDUs.

DATASUM keyword. The value field of the **DATASUM** keyword *shall* consist of a character string that *should* contain the *unsigned integer* complement checksum of the data records in the HDU (i.e., excluding the header records). For this purpose, each 2880-byte **FITS** logical record *should* be interpreted as consisting of 720 32-bit unsigned integers. The 4 bytes in each integer *must* be interpreted in order of decreasing significance where the *most significant* byte is first, and the *least significant* byte is last. Accumulate the sum of these integers using *1's ones'* complement arithmetic in which any overflow of the *most significant* bit is propagated back into the *least significant* bit of the sum.

The **DATASUM** value is expressed as a character string (i.e., enclosed in *single quote* characters) because support for the full range of 32-bit *unsigned integer* keyword values is problematic in some software systems. This string *may* be padded with non-significant leading or trailing blank characters or leading zeros. A string containing only one or more consecutive ASCII blanks *may* be used to represent an undefined or unknown value for the **DATASUM** keyword. The **DATASUM** keyword *may* be omitted in HDUs that have no data records, but it is preferable to include the keyword with a value of 0. Otherwise, a missing **DATASUM** keyword asserts no knowledge of the checksum of the data records. Recording in the comment field the ISO-8601-formatted Datetime (?) when the value of this keyword record is created or updated is *recommended*.

CHECKSUM keyword. The value field of the **CHECKSUM** keyword *shall* consist of an ASCII character string whose value forces the 32-bit *1's ones'* complement checksum accumulated over the entire **FITS** HDU to equal negative 0. (Note that *1ones'* complement arithmetic has both positive and negative zero elements). It is *recommended* that the particular 16-character string generated by the algorithm described in Appendix ??? be used. A string containing only one or more consecutive ASCII blanks *may* be used to represent an undefined or unknown value for the **CHECKSUM** keyword.

The **CHECKSUM** keyword value *must* be expressed in fixed format, when the algorithm in Appendix ??? is used, otherwise the usage of fixed format is *recommended*. Recording in the comment field the ISO-8601-formatted Datetime when the value of this keyword record is created or updated is *recommended*.

If the **CHECKSUM** keyword exists in the header of the HDU and the accumulated checksum is not equal to -0, or if the **DATASUM** keyword exists in the header of

the HDU and its value does not match the data checksum, then this provides a strong indication that the content of the HDU has changed subsequent to the time that the respective keyword value was computed. Such an invalid checksum may indicate corruption during a prior file copy or transfer operation, or a corruption of the physical media on which the file was stored. It may alternatively reflect an intentional change to the data file by subsequent data processing if the **CHECKSUM** value was not also updated.

Normally both keywords will be present in the header if either is present, but this is not **required**. These keywords apply *only* to the HDU in which they are contained. If these keywords are written in one HDU of a multi-HDU **FITS** file then it is *strongly recommended* that they also be written to every other HDU in the file with values appropriate to each HDU in turn; in that case the checksum accumulated over the entire file will equal **-0** as well. The **DATASUM** keyword *must* be updated before the **CHECKSUM** keyword. In general updating the two checksum keywords *should* be the final step of any update to either data or header records in a **FITS** HDU. It is highly **recommended** that if a **FITS** file is intended for public distribution, then the checksum keywords, if present, *should* contain valid values.

4.4.3. Additional keywords

New keywords *may* be devised in addition to those described in this **standard**, so long as they are consistent with the generalized rules for keywords and do not conflict with mandatory or reserved keywords. Any keyword that refers to or depends upon the existence of other specific HDUs in the same or other files *should* be used with caution because the persistence of those HDUs cannot always be guaranteed.

5. Data Representation

Primary and extension data *shall* be represented in one of the formats described in this section. **FITS** data *shall* be interpreted to be a byte stream. Bytes are in big-endian order of decreasing significance. The byte that includes the sign bit *shall* be first, and the byte that has the ones bit *shall* be last.

5.1. Characters

Each character *shall* be represented by one byte. A character *shall* be represented by its **7-bit** ASCII (?) code in the **low order** seven bits in the byte. The high-order bit *shall* be zero.

5.2. Integers

5.2.1. Eight-bit

Eight-bit integers *shall* be unsigned binary integers, contained in one byte with decimal values ranging from 0 to 255.

5.2.2. Sixteen-bit

Sixteen-bit integers *shall* be two's complement signed binary integers, contained in two bytes with decimal values ranging from **-32768** to **+32767**.

5.2.3. Thirty-two-bit

Thirty-two-bit integers *shall* be two's complement signed binary integers, contained in four bytes with decimal values ranging from **-2147483648** to **+2147483647**.

5.2.4. Sixty-four-bit

Sixty-four-bit integers *shall* be two's complement signed binary integers, contained in eight bytes with decimal values ranging from **-9223372036854775808** to **+9223372036854775807**.

5.2.5. Unsigned integers

The **FITS** format does not support a native unsigned integer data type (except for the unsigned 8-bit byte data type) therefore unsigned 16-bit, 32-bit, or 64-bit binary integers cannot be stored directly in a **FITS** data array. Instead, the appropriate offset *must* be applied to the unsigned integer to shift the value into the range of the corresponding signed integer, which is then stored in the **FITS** file. The **BZERO** keyword *shall* record the amount of the offset needed to restore the original unsigned value. The **BSCALE** keyword *shall* have the default value of **1.0** in this case, and the appropriate **BZERO** value, as a function of **BITPIX**, is specified in Table ??.

This same technique *must* be used when storing unsigned integers in a **binary table** column of signed integers (Sect. ??). In this case the **TSCALE** keyword (analogous to **BSCALE**) *shall* have the default value of **1.0**, and the appropriate **TZERO** value (analogous to **BZERO**) is specified in Table ??.

5.3. IEEE-754 floating point

Transmission of 32- and 64-bit floating-point data within the **FITS** format *shall* use the ANSI/IEEE-754 standard (?). **BITPIX** = **-32** and **BITPIX** = **-64** signify 32- and 64-bit IEEE floating-point numbers, respectively; the absolute value of **BITPIX** is used for computing the sizes of data structures. The full IEEE set of number forms is allowed for **FITS** interchange, including all special values.

The **BLANK** keyword *should not* be used when **BITPIX** = **-32** or **-64**; rather, the IEEE NaN *should* be used to represent an undefined value. Use of the **BSCALE** and **BZERO** keywords is **not recommended**.

Appendix ?? has additional details on the IEEE format.

Table 12: Mandatory keywords in primary header preceding random groups.

# Position	Keyword
1	SIMPLE SIMPLE = TT
2	BITPIX BITPIX
3	NAXIS NAXIS
4	NAXIS1 NAXIS1 = 00
5	NAXISn , n NAXIS n , $n = 2, \dots$, value of NAXIS NAXIS
:	:
	(other keywords, which must include ...)
	GROUPS GROUPS = TT
	PCOUNT PCOUNT
	GCOUNT GCOUNT
	:
last	ENDEND

5.4. Time

There is strictly no such thing as a data type for *time valued* data, but rules to encode time values are given in Sect. ?? and in more detail in ?.

6. Random groups Random-groups structure

The **random groups** random-groups structure allows a collection of ‘groups’, where a group consists of a subarray of data and a set of associated parameter values, to be stored within the **FITS** FITS primary data array. Random groups have been used almost exclusively for applications in radio interferometry; outside this field, there is little support for reading or writing data in this format. Other than the existing use for radio interferometry data, the **random groups** random-groups structure is deprecated and **should not** should not be further used. For other applications, the **binary table** binary-table extension (Sect. ??) provides a more extensible and better documented way of associating groups of data within a single data structure.

6.1. Keywords

6.1.1. Mandatory keywords

The **SIMPLE** SIMPLE keyword is **required** required to be the first keyword in the primary header of all **FITS** FITS files, including those with **random groups** random-groups records. If the **random groups** random-groups format records follow the primary header, the keyword records of the primary header **must** must use the keywords defined in Table ?? in the order specified. No other keywords **may** may intervene between the **SIMPLE** SIMPLE keyword and the last **NAXISn** NAXIS n keyword.

SIMPLE SIMPLE keyword. The keyword record containing this keyword is structured in the same way as if a primary data array were present (Sect. ??).

BITPIX BITPIX keyword. The keyword record containing this keyword is structured as prescribed in Sect. ??.

NAXIS NAXIS keyword. The value field **shall** shall contain an integer ranging from 1 to 999, representing one more than the number of axes in each data array.

NAXIS1 NAXIS1 keyword. The value field **shall** shall contain the integer **00**, a signature of **random groups** random-groups format indicating that there is no primary data array.

NAXISn NAXIS n keywords ($n=2n = 2, \dots$, value of **NAXIS** NAXIS). The **NAXISn** keywords **must** NAXIS $n = 2, \dots$, NAXIS, in increasing order of **nn**, and for no larger values of **nn**. The value field **shall** shall contain an integer, representing the number of positions along **axis n-1** Axis $n - 1$ of the data array in each group.

GROUPS GROUPS keyword. The value field **shall** shall contain the logical constant **TT**. The value **TT** associated with this keyword implies that **random groups** random-groups records are present.

PCOUNT PCOUNT keyword. The value field **shall** shall contain an integer equal to the number of parameters preceding each array in a group.

GCOUNT GCOUNT keyword. The value field **shall** shall contain an integer equal to the number of random groups present.

ENDEND keyword. This keyword has no associated value. Bytes 9 through 80 **shall** shall contain ASCII spaces (decimal 32 or hexadecimal 20).

The total number of bits in the **random groups** random-groups records exclusive of the fill described in Sect. ?? is given by the following expression:

$$N_{\text{bits}} N_{\text{bits}} = |\text{BITPIX} \text{ BITPIX}| \times \text{GCOUNT} \text{ GCOUNT} \times (\text{PCOUNT} \text{ PCOUNT} + \text{NAXIS2} \text{ NAXIS2} \times \text{NAXIS3} \text{ NAXIS3} \times \dots)$$

where N_{bits} is N_{bits} is non-negative and the number of bits excluding fill; **mm** is the value of **NAXIS** NAXIS; and **BITPIX**, **GCOUNT**, **PCOUNT** BITPIX, GCOUNT, PCOUNT, and the **NAXISn** NAXIS n represent the values associated with those keywords.

6.1.2. Reserved keywords

PTYPEn PTYPE n keywords. The value field **shall** shall contain a character string giving the name of **parameter n** Parameter n . If the **PTYPEn** PTYPE n keywords for more than one value of **nn** have the same associated name in the value field, then the data value for the parameter of that name is to be obtained by adding the derived data values of the corresponding parameters. This rule provides a mechanism by which a random parameter **may** may have more precision than the accompanying data array elements; for example, by summing two 16-bit values with the

first scaled relative to the other such that the sum forms a number of up to 32-bit precision.

PSCAL_nPSCAL_n keywords. This keyword *shall* be used, along with the **PZERON**PZERON keyword, when the n^{th} FITS_nth FITS group parameter value is not the true physical value, to transform the group parameter value to the true physical values it represents, using Eq. ???. The value field *shall* contain a floating-point number representing the coefficient of the linear term in Eq. ??, the scaling factor between true values and group parameter values at zero offset. The default value for this keyword is 1.01.0.

PZERONPZERON keywords. This keyword *shall* be used, along with the **PSCAL_n**PSCAL_n keyword, when the n^{th} FITS_nth FITS group parameter value is not the true physical value, to transform the group parameter value to the physical value. The value field *shall* contain a floating-point number, representing the true value corresponding to a group parameter value of zero. The default value for this keyword is 0.00.0. The transformation equation is as follows:

$$\text{physical_value} = \text{PZERON} + \text{PSCAL}_n \times \text{group_parameter_value}$$

6.2. Data sequence

Random groups data shallRandom-groups data *shall* consist of a set of groups. The number of groups *shall* be specified by the **GCOUNT**GCOUNT keyword in the associated header. Each group *shall* consist of the number of parameters specified by the **PCOUNT**PCOUNT keyword followed by an array with the number of elements N_{elem} given N_{elem} given by the following expression:

$$N_{\text{elem}} = (\text{NAXIS}_2 \times \text{NAXIS}_3 \times \dots \times \text{NAXIS}_m)$$

where N_{elem} is the number of elements in the data array in a group, m is the value of **NAXIS**, and the **NAXIS_n** represent the values associated with those keywords.

The first parameter of the first group *shall* appear in the first location of the first data block. The first element of each array *shall* immediately follow the last parameter associated with that group. The first parameter of any subsequent group *shall* immediately follow the last element of the array of the previous group. The arrays *shall* be organized internally in the same way as an ordinary primary data array. If the groups data do not fill the final data block, the remainder of the block *shall* be filled with zero values in the same way as a primary data array (Sect. ??). If **random groups** records are present, there *shall* be no primary data array.

6.3. Data representation

Permissible data representations are those listed in Sect. ?. Parameters and elements of associated data arrays *shall* have the same representation. If more precision is required for an associated parameter than for an element of a data array, the

Table 13: Mandatory keywords in **image** IMAGE extensions.

# Position	Keyword
1	XTENSION= ' IMAGE ₋₋₋ '
2	BITPIX BITPIX
3	NAXIS NAXIS
4	NAXIS_n , $n = 1, \dots$, NAXIS NAXIS
5	PCOUNT PCOUNT = 00
6	GCOUNT GCOUNT = 11
:	(other keywords ...)
:	
last	ENDEND

parameter *shall* be divided into two or more addends, represented by the same value for the **PTYPE_n**PTYPE_n keyword. The value *shall* be the sum of the physical values, which *may* have been obtained from the group parameter values using the **PSCAL_n** and **PZERON** and **PZERON** keywords.

7. Standard extensions

A standard extension is a conforming extension whose organization and content are completely specified in this **standard**. The specifications for the 3 currently defined standard extensions, namely,

- 'IMAGE' IMAGE extensions;
- 'TABLE' ASCII table TABLE ASCII-table extensions; and
- 'BINTABLE' binary table extensions ; BINTABLE binary-table extensions

are given in the following sections. A list of other conforming extensions is given in Appendix ??.

7.1. Image extension

The **FITSimage** FITS IMAGE extension is nearly identical in structure to the the primary HDU and is used to store an array of data. Multiple **image** IMAGE extensions can be used to store any number of arrays in a single **FITS** file. The first keyword in an image extension *shall* be **XTENSION=**' IMAGE₋₋₋' XTENSION=

7.1.1. Mandatory keywords

The **XTENSION** keyword is required to be the first keyword of all **image** IMAGE extensions. The keyword records in the header of an image extension *must* use the keywords defined in Table ?? in the order specified. No other keywords *may* intervene between the **XTENSION** and **GCOUNT** XTENSION and GCOUNT keywords.

XTENSION keyword. The value field *shall* contain the character string ' IMAGE₋₋₋'.

BITPIX keyword. The value field *shall* contain an integer. The absolute value is used in computing the sizes of data structures. It *shall* specify the number of bits that represent a data value. The only valid values of **BITPIX** are given in Table ???. Writers of **IMAGE** extensions *should* select a **BITPIX** data type appropriate to the form, range of values, and accuracy of the data in the array.

NAXIS keyword. The value field *shall* contain a non-negative integer no greater than 999, representing the number of axes in the associated data array. If the value is zero then the *image extension shall not* have any data blocks following the header.

NAXIS n keywords. The **NAXIS n** keywords *must* be present for all values $n = 1, \dots, \text{NAXIS}$, in increasing order of n , and for no other values of n . The value field of this indexed keyword *shall* contain a non-negative integer, representing the number of elements along *axis n* of a data array. If the value of any of the **NAXIS n** keywords is zero, then the *image extension shall not* have any data blocks following the header. If **NAXIS** is equal to 0, *there should not be any* **NAXIS n** keywords.

PCOUNT keyword. The value field *shall* contain the integer 0.

GCOUNT keyword. The value field *shall* contain the integer 1; each **IMAGE** extension contains a single array.

END keyword. This keyword has no associated value. Bytes 9 through 80 *shall* be filled with ASCII spaces (decimal 32 or hexadecimal 20).

7.1.2. Other reserved keywords

The reserved keywords defined in Sect. ??? (except for **EXTEND** and **BLOCKED**) *may* appear in an *image extension* header. The keywords *must* be used as defined in that section.

7.1.3. Data sequence

The data format *shall* be identical to that of a primary data array as described in Sect. ???.

7.2. The ASCII table extension

The **ASCII table** extension provides a means of storing catalogs and tables of astronomical data in **FITS** format. Each row of the table consists of a fixed-length sequence of ASCII characters divided into fields that correspond to the columns in the table. The first keyword in an **ASCII ta-**

ble extension *shall* be record in an ASCII-table extension *shall* be **XTENSION=TABLE**.

7.2.1. Mandatory keywords

The header of an **ASCII table extension** *must* use the keywords defined in Table ???. The first keyword *must* be **XTENSION**; the seven keywords following **XTENSION(BITPIX...TFIELDS)** *must* be in the order specified with no intervening keywords.

XTENSION keyword. The value field *shall* contain the character string *value text* 'TABLE'.

BITPIX keyword. The value field *shall* contain the integer 8, denoting that the array contains ASCII characters.

NAXIS keyword. The value field *shall* contain the integer 2, denoting that the included data array is two-dimensional: rows and columns.

NAXIS1 keyword. The value field *shall* contain a non-negative integer, giving the number of ASCII characters in each row of the table. This includes all the characters in the defined fields plus any characters that are not included in any field.

NAXIS2 keyword. The value field *shall* contain a non-negative integer, giving the number of rows in the table.

PCOUNT keyword. The value field *shall* contain the integer 0.

GCOUNT keyword. The value field *shall* contain the integer 1; the data blocks contain a single table.

TFIELDS keyword. The value field *shall* contain a non-negative integer representing the number of fields in each row. The maximum permissible value is 999.

TBCOL n keywords. The **TBCOL n** keywords *must* be present for all values $n = 1, \dots, \text{TFIELDS}$ and for no other values of n . The value field of this indexed keyword *shall* contain an integer specifying the column in which *field n* starts. The first column of a row is numbered 1.

TFORM n keywords. The **TFORM n** keywords *must* be present for all values $n = 1, \dots, \text{TFIELDS}$ and for no other values of n . The value field of this indexed keyword *shall* contain a character string describing the format in which *field n* is encoded. Only the formats in Table ??, interpreted as Fortran (?) input formats and discussed in more detail in Sect. ??, are permitted for encoding. Format codes *must* be specified in each case. Other format editing codes common

Table 14: Mandatory keywords in ASCII table ASCII-table extensions.

# Position	Keyword
1	XTENSION= <code>'TABLE_...'</code>
2	BITPIX BITPIX = 88
3	NAXIS NAXIS = 22
4	NAXIS1 NAXIS1
5	NAXIS2 NAXIS2
6	PCOUNT PCOUNT = 00
7	GCOUNT GCOUNT = 11
8	TFIELDS TFIELDS
:	:
:	(other keywords, including (if TFIELDS TFIELDS is not zero) ...)
:	TTYPEN, n=1, 2, ..., k where k TTYPEN, n = 1, 2, ..., k, where k is the value of TFIELDS (Recommended TFIELDS (recommended))
:	TBCOLn, n=1, 2, ..., k where k TBCOLn, n = 1, 2, ..., k, where k is the value of TFIELDS (Required TFIELDS (required))
:	TFORMn, n=1, 2, ..., k where k TFORMn, n = 1, 2, ..., k, where k is the value of TFIELDS (Required TFIELDS (required))
:	:
last	ENDEND

Table 15: Valid TFORMn TFORMn format values in the table be assigned a unique, case-insensitive name with this keyword, and it is recommended that the character string be composed only of upper and lower case upper- and lower-case letters, digits, and the underscore ('_' '_'), decimal 95, hexadecimal 5F) character. Use of other characters is not recommended because it may be difficult to map the column names into variables in some languages (e.g., any hyphens, '*' or '+' '*' or '+' characters in the name may be confused with mathematical operators). String comparisons with the TTYPEN keyword values should not TTYPEN keyword values should not be case sensitive (e.g., 'TIME' and 'Time' should 'TIME' and 'Time' should be interpreted as the same name).

Field value	Data type
Aw Aw	Character
Iw Iw	Decimal integer
Fw.d Fw.d	Floating-point, fixed decimal notation
Ew.d Ew.d	Floating-point, exponential notation
Dw.d Dw.d	Floating-point, exponential notation

Notes. w is the width in characters of the field and d is the number of digits to the right of the decimal.

to Fortran such as repetition, positional editing, scaling, and field termination are not permitted. All values in numeric fields have a number base of ten (i.e., they are decimal); binary, octal, hexadecimal, and other representations are not permitted. The TDISPn TDISPn keyword, defined in Sect. ??, may ??, may be used to recommend that a decimal integer value in an ASCII table be displayed as the equivalent binary, octal, or hexadecimal value.

ENDEND keyword. This keyword has no associated value. Bytes 9 through 80 shall shall contain ASCII spaces (decimal 32 or hexadecimal 20).

7.2.2. Other reserved keywords

In addition to the reserved keywords defined in Sect. ?? (except for EXTEND and BLOCKED EXTEND and BLOCKED), the following other reserved keywords may may be used to describe the structure of an ASCII table ASCII-table data array. They are optional optional, but if they appear within an ASCII table ASCII-table extension header, they must must be used as defined in this section of this standard Standard.

TTYPEN TTYPEN keywords. The value field for this indexed keyword shall shall contain a character string giving the name of field nField n. It is strongly recommended that every field of

the table be assigned a unique, case-insensitive name with this keyword, and it is recommended that the character string be composed only of upper and lower case upper- and lower-case letters, digits, and the underscore ('_' '_'), decimal 95, hexadecimal 5F) character. Use of other characters is not recommended because it may be difficult to map the column names into variables in some languages (e.g., any hyphens, '*' or '+' '*' or '+' characters in the name may be confused with mathematical operators). String comparisons with the TTYPEN keyword values should not TTYPEN keyword values should not be case sensitive (e.g., 'TIME' and 'Time' should 'TIME' and 'Time' should be interpreted as the same name).

TUNITn TUNITn keywords. The value field shall shall contain a character string describing the physical units in which the quantity in field nField n, after any application of TSCALn and TZEROn TSCALn and TZEROn, is expressed. Units must must follow the prescriptions in Sect. ??.

TSCALn TSCALn keywords. This indexed keyword shall shall be used, along with the TZEROn TZEROn keyword, to linearly scale the values in the table field nField n to transform them into the physical values that they represent using Eq. ???. The value field shall shall contain a floating-point number representing the coefficient of the linear term in the scaling equation. The default value for this keyword is 1.01.0. This keyword must not must not be used for A-format fields.

The transformation equation used to compute a true physical value from the quantity in field nField n is

$$\text{physical_value} = \text{TZEROn TZEROn} + \text{TSCALn TSCALn} \times \text{field_value}$$

where field.value field.value is the value that is actually stored in that table field in the FITS FITS file.

TZEROn TZEROn keywords. This indexed keyword shall shall be used, along with the TSCALn TSCALn keyword, to linearly scale the values in the table field nField n to transform them into the physical values that they represent using Eq. ???. The value field shall shall contain a floating-point number represent-

Table 16: Valid **TDISPn** format values in **TABLE** extensions.

Field value	Data type
Aw Aw	Character
Iw.m Iw.m	Integer
Bw.m Bw.m	Binary, integers only
Ow.m Ow.m	Octal, integers only
Zw.m Zw.m	Hexadecimal, integers only
Fw.d Fw.d	Floating-point, fixed decimal notation
Ew.dEe Ew.dEe	Floating-point, exponential notation
ENw.d ENw.d	Engineering; E format with exponent multiple of three
ESw.d ESw.d	Scientific; same as EN but non-zero leading digit if not zero
Gw.dEe Gw.dEe	General; appears as F if significance not lost, else E.
Dw.dEe Dw.dEe	Floating-point, exponential notation

Notes. **w** is the width in characters of displayed values, **m** is the minimum number of digits displayed, **d** is the number of digits to right of decimal, and **e** is number of digits in exponent. The **.m** and **Ee** fields are *optional*.

ing the physical value corresponding to an array value of zero. The default value for this keyword is **0.00**. This keyword **must not** be used for A-format fields.

TNULLn keywords. The value field for this indexed keyword **shall** contain the character string that represents an undefined value for **field n**. The string is implicitly space filled to the width of the field.

TDISPn keywords. The value field of this indexed keyword **shall** contain a character string describing the format recommended for displaying an **ASCII text** representation of the contents of **field n**. This keyword overrides the default display format given by the **TFORMn** keyword. If the table value has been scaled, the physical value, derived using Eq. ??, **shall** be displayed. All elements in a field **shall** be displayed with a single, repeated format. Only the format codes in Table ??, interpreted as Fortran (?) output formats, and discussed in more detail in Sect. ??, are permitted for encoding. The format codes **must** be specified in upper case. If the **Bw.m**, **Ow.m**, and **Zw.m** formats are not readily available to the reader, the **Iw.m** display format may be used instead, and if the **ENw.d** and **ESw.d** formats are not available, **Ew.d** may be used.

The following four keywords **may** be used to specify minimum and maximum values in numerical columns of a **FITS** ASCII or binary table. These keywords **must** have the same data type as the physical values in the associated column (either an integer or a **floating point** number). Any undefined elements in the column **shall** be excluded when determining the value of these keywords.

TDMINn keywords. The value field **shall** contain a number giving the minimum physical value contained in **column n** of the table. This keyword is analogous to the **DATAMIN** keyword that is defined for arrays in Sect. ??.

TDMAXn keywords. The value field **shall** contain a number giving the maximum physical value contained in

column n of the table. This keyword is analogous to the **DATAMAX** keyword that is defined for arrays in Sect. ??.

TLMINn keywords. The value field **shall** contain a number that specifies the minimum physical value in **column n** that has a valid meaning or interpretation. The column is not **required** to actually contain any elements that have this value, and the column **may** contain elements with physical values less than **TLMINn**, however, the interpretation of any such out-of-range column elements is not defined.

TLMAXn keywords. The value field **shall** contain a number that specifies the maximum physical value in **column n** that has a valid meaning or interpretation. The column is not **required** to actually contain any elements that have this value, and the column **may** contain elements with physical values greater than **TLMAXn**, however, the interpretation of any such out-of-range column elements is not defined.

The **TLMINn** and **TLMAXn** keywords are commonly used when constructing histograms of the data values in a column. For example, if a table contains columns that give the **X and Y** pixel location of a list of photons that were detected by a **photon counting** device, then the **TLMINn** and **TLMAXn** keywords could be used **respectively** to specify the minimum and maximum values that the detector is capable of assigning to the **X and Y** columns.

7.2.3. Data sequence

The table is constructed from a two-dimensional array of ASCII characters. The row length and the number of rows **shall** be those specified, respectively, by the **NAXIS1** and **NAXIS2** keywords of the associated header. The number of characters in a row and the number of rows in the table **shall** determine the size of the character array. Every row in the array **shall** have the same number of characters. The first character of the first row **shall** be at the start of the data block immediately following the last header block. The

first character of subsequent rows *shall* follow immediately the character at the end of the previous row, independent of the *FITS* block structure. The positions in the last data block after the last character of the last row of the table *shall* be filled with ASCII spaces.

7.2.4. Fields

Each row in the array *shall* consist of a sequence of from 0 to 999 fields, as specified by the *TFIELDSTFIELDS* keyword, with one entry in each field. For every field, the Fortran (?) format of the information contained (given by the *TFORMnTFORMn* keyword), the location in the row of the beginning of the field (given by the *TBCOLnTBCOLn* keyword), and (*optionally*, but *strongly recommended*) the field name (given by the *TTYPEnTTYPEn* keyword), *shall* be specified in the associated header. The location and format of fields *shall* be the same for every row. Fields *may* overlap, but this usage is *not recommended*. Only a limited set of ASCII character values *may* appear within any field, depending on the field type as specified below. There *may* be characters in a table row that are not included in any field, (e.g., between fields, or before the first field or after the last field). Any 7-bit seven-bit ASCII character *may* occur in characters of a table row that are not included in a defined field. A common convention is to include a space character between each field for added legibility if the table row is displayed verbatim. It is also permissible to add control characters, such as a carriage return or *line feed* character, following the last field in each row as a way of formatting the table if it is printed or displayed by a *text editing* program.

7.2.5. Entries

All data in an *ASCII table extension field* *shall* be ASCII text in a format that conforms to the rules for fixed field input in Fortran (?) format, as described below. The only possible formats *shall* be those specified in Table ???. If values of -0 and $+0$ need to be distinguished, then the sign character *should* appear in a separate field in character format. *TNULLnTNULLn* keywords *may* be used to specify a character string that represents an undefined value in each field. The characters representing an undefined value *may* differ from field to field but *must* be the same within a field. Writers of ASCII tables *should* select a format for each field that is appropriate to the form, range of values, and accuracy of the data in that field. This *standard* does not impose an upper limit on the number of digits of precision, nor any limit on the range of numeric values. Software packages that read or write data according to this *standard* could be limited, however, in the range of values and exponents that are supported (e.g., to the range that can be represented by 32-bit or 64-bit binary numbers).

The value of each entry *shall* be interpreted as described in the following paragraphs.

Character fields. The value of a character-formatted (*AwAw*) field is a character string of width *w* containing the characters in columns *TBCOLn* through *TBCOLn + w - 1*. The character string *shall* be composed of the restricted set of *ASCII text* characters with deci-

mal values in the range 32 through 126 (hexadecimal 20 through 7E).

Integer fields. The value of an integer-formatted (*IwIw*) field is a signed decimal integer contained in columns *TBCOLn* through *TBCOLn + w - 1* consisting of a single *optionalsign* ('+' or '-' *optional sign* ('+' or '-')) followed by one or more decimal digits ('0' through '9' '0' through '9'). Non-significant space characters *may* precede and/or follow the integer value within the field. A blank field has value 0. All characters other than leading and trailing spaces, a contiguous string of decimal digits, and a single leading sign character are forbidden.

Real fields. The value of a real-formatted field (*Fw.d*, *Ew.d*, *Dw.d*) is a real number determined from the *w* characters from columns *TBCOLn* through *TBCOLn + w - 1*. The value is formed by

1. discarding any trailing space characters in the field and right-justifying the remaining characters,
2. interpreting the first non-space characters as a numeric string consisting of a single *optionalsign* ('+' or '-' *optional sign* ('+' or '-')) followed by one or more decimal digits ('0' through '9' '0' through '9') *optionally* containing a single decimal point ('.' '.'). The numeric string is terminated by the end of the right-justified field or by the occurrence of any character other than a decimal point ('.' '.') and the decimal integers ('0' through '9' '0' through '9'). If the string contains no explicit decimal point, then the implicit decimal point is taken as immediately preceding the rightmost *d* digits of the string, with leading zeros assumed if necessary. The use of implicit decimal points is *deprecated* and is strongly discouraged because of the possibility that *FITSreading* programs will misinterpret the data value. Therefore, real-formatted fields *should* always contain an explicit decimal point.
3. If the numeric string is terminated by a
 - (a) '+' or '-' '+' or '-', interpreting the following string as an exponent in the form of a signed decimal integer, or
 - (b) 'E', or 'D' 'E', or 'D', interpreting the following string as an exponent of the form *E* or *DE* or *D* followed by an *optionally* signed decimal integer constant.
4. The exponent string, if present, is terminated by the end of the right-justified string.
5. Characters other than those specified above, including embedded space characters, are forbidden.

The numeric value of the table field is then the value of the numeric string multiplied by ten (10) to the power of the exponent string, i.e., $\text{value} = \text{numeric_string} \times 10^{(\text{exponent_string})}$. The default exponent is zero and a blank field has value zero. There is no difference between the *F*, *D*, and *EF*, *D*, and *E* formats; the content of the string determines its interpretation. Numbers requiring more precision and/or range than the local computer can support *may* be represented. It is good form to specify a *D* format in *TFORMnD* format in *TFORMn* for a column of an ASCII table when that col-

umn will contain numbers that cannot be accurately represented in 32-bit IEEE binary format (see Appendix ??).

7.3. Binary table *Binary-table* extension

The **binary table** *binary-table* extension is similar to the ASCII table in that it provides a means of storing catalogs and tables of astronomical data in **FITS***FITS* format, however, it offers more features and provides more-efficient data storage than ASCII tables. The numerical values in binary tables are stored in more-compact binary formats rather than coded into ASCII, and each field of a binary table can contain an array of values rather than a simple scalar as in ASCII tables. The first keyword in a **binary table extension** shall record in a *binary-table extension* shall be **XTENSION=**'**BINTABLE**'**XTENSION=**'**BINTABLE**'.

7.3.1. Mandatory keywords

The **XTENSION***XTENSION* keyword is the first keyword of all **binary table** *binary-table* extensions. The seven keywords following (**BITPIX**...**TFIELDS**) *must***BITPIX** ... **TFIELDS** *must* be in the order specified in Table ??, with no intervening keywords.

XTENSION*XTENSION* keyword. The value field shall contain the character string '**BINTABLE**' '**BINTABLE**'.

BITPIX*BITPIX* keyword. The value field shall contain the integer 8, denoting that the array is an array of 8-bit bytes.

NAXIS*NAXIS* keyword. The value field shall contain the integer 2, denoting that the included data array is two-dimensional: rows and columns.

NAXIS1*NAXIS1* keyword. The value field shall contain a non-negative integer, giving the number of 8-bit bytes in each row of the table.

NAXIS2*NAXIS2* keyword. The value field shall contain a non-negative integer, giving the number of rows in the table.

PCOUNT*PCOUNT* keyword. The value field shall contain the number of bytes that follow the table in the supplemental data area called the heap.

GCOUNT*GCOUNT* keyword. The value field shall contain the integer 1; the data blocks contain a single table.

TFIELDS*TFIELDS* keyword. The value field shall contain a non-negative integer representing the number of fields in each row. The maximum permissible value is 999.

TFORMn*TFORMn* keywords. The **TFORMn** keywords *must* be present for all values $n = 1, \dots, \text{TFIELDS}$ and for no other values of

Table 18: Valid **TFORMn** data types in **BINTABLE** extensions.

TFORMn value	Description
L 'L'	Logical
X 'X'	Bit
B 'B'	Unsigned byte
I 'I'	16-bit integer
J 'J'	32-bit integer
K 'K'	64-bit integer
A 'A'	Character
E 'E'	Single precision floating point
D 'D'	Double precision floating point
C 'C'	Single precision complex
M 'M'	Double precision complex
P 'P'	Array Descriptor (32-bit)
Q 'Q'	Array Descriptor (64-bit)

Notes. ^(†) Number of eight-bit bytes needed to contain all bits.

nn. The value field of this indexed keyword shall contain a character string of the form $rTaTa$. The repeat count r is the ASCII representation of a non-negative integer specifying the number of elements in field n . The default value of r is 1; the repeat count need not be present if it has the default value. A zero element count, indicating an empty field, is permitted. The data type **TT** specifies the data type of the contents of field n . Only the data types in Table ?? are permitted. The format codes **must** be specified in upper case. For fields of type **Por** **QP** or **Q**, the only permitted repeat counts are 0 and 1. The additional characters a are optional and are not further defined in this standard. Table ?? lists the number of bytes each data type occupies in a table row. The first field of a row is numbered 1. The total number of bytes n_{row} in a table row is given by

$$n_{row} = \sum_{i=1}^{\text{TFIELDS}} r_i b_i \quad (8)$$

where r_i is the repeat count for field i , b_i is the number of bytes for the data type in field i , and **TFIELDS** is the value of that keyword, **must** equal the value of **NAXIS1**.

END keyword. This keyword has no associated value. Bytes 9 through 80 shall contain ASCII spaces (decimal 32 or hexadecimal 20).

7.3.2. Other reserved keywords

In addition to the reserved keywords defined in Sect. ?? (except for **EXTEND** and **BLOCKED**), the following other reserved keywords may be used to describe the structure of a **binary table** data array. They are optional, but if they appear within a **binary table** extension header, they **must** be used as defined in this section of this standard.

TTYPEn keywords. The value field for this indexed keyword shall contain a character string giving the name of field n . It is strongly recommended that every field of

Table 17: Mandatory keywords in **binary table** **binary-table** extensions.

# Position	Keyword
1	XTENSION= _ 'BINTABLE'
2	BITPIX BITPIX = 88
3	NAXIS NAXIS = 22
4	NAXIS1NAXIS1
5	NAXIS2NAXIS2
6	PCOUNTPCOUNT
7	GCOUNT GCOUNT = 11
8	TFIELDSTFIELDS
	:
	:
	(other keywords, including (if TFIELDS TFIELDS is not zero) ...)
	TTYPEn , $n=1, 2, \dots, k$ where k TTYPEn , $n=1, 2, \dots, k$, where k is the value of TFIELDS (Recommended TFIELDS (<i>recommended</i>))
	TFORMn , $n=1, 2, \dots, k$ where k TFORMn , $n=1, 2, \dots, k$, where k is the value of TFIELDS (Required TFIELDS (<i>required</i>))
	:
	:
last	ENDEND

the table be assigned a unique, case-insensitive name with this keyword, and it is **recommended***recommended* that the character string be composed only of **upper and lower case upper-and lower-case** letters, digits, and the underscore ('_'_, decimal 95, hexadecimal 5F) character. Use of other characters is **not recommended***not recommended* because it may be difficult to map the column names into variables in some languages (e.g., any hyphens, **'*' or '+'** **'*' or '+'** characters in the name may be confused with mathematical operators). String comparisons with the **TTYPEn**keyword values should not**TTYPEn** keyword values *should not* be case sensitive (e.g., **'TIME'** and **'Time'** *should* **'TIME'** and **'Time'** *should* be interpreted as the same name).

TUNITnTUNITn keywords. The value field **shall***shall* contain a character string describing the physical units in which the quantity in **field n**Field n , after any application of **TSCALn**and **TZEROn**TSCALn and **TZEROn**, is expressed. Units **must***must* follow the prescriptions in Sect. ??.

TSCALnTSCALn keywords. This indexed keyword **shall***shall* be used, along with the **TZEROn**TZEROn keyword, to linearly scale the values in the table **field n**Field n to transform them into the physical values that they represent using Eq. ?. It **must***must not* be used if the format of **field nis A, L, or X**Field n is **'A', 'L', or 'X'**. For fields with all other data types, the value field **shall***shall* contain a floating-point number representing the coefficient of the linear term in Eq. ?, which is used to compute the true physical value of the field, or, in the case of the complex data types **Cand M'C' and 'M'**, of the real part of the field, with the imaginary part of the scaling factor set to zero. The default value for this keyword is **1.01.0**. For fields of type **Por Q'P' or 'Q'**, the values of **TSCALn**and **TZEROn**TSCALn and **TZEROn** are to be applied to the values in the data array in the heap area, not the values of the array descriptor (see Sect. ??).

TZEROnTZEROn keywords. This indexed keyword **shall***shall* be used, along with the **TSCALn**TSCALn keyword, to linearly scale the values in the table **field n**Field n to transform them into the physical values that they represent using Eq. ?. It **must***must not* be used if the format of **field nis A, L, or X**Field n is

'A', 'L', or 'X'. For fields with all other data types, the value field **shall***shall* contain a floating-point number representing the true physical value corresponding to a value of zero in **field nof the FITS**Field n of the *FITS* file, or, in the case of the complex data types **Cand M'C' and 'M'**, in the real part of the field, with the imaginary part set to zero. The default value for this keyword is **0.00.0**. Equation ?? is used to compute a true physical value from the quantity in **field n**Field n . For fields of type **Por Q'P' or 'Q'**, the values of **TSCALn**and **TZEROn**TSCALn and **TZEROn** are to be applied to the values in the data array in the heap area, not the values of the array descriptor (see Sect. ??).

In addition to its use in representing floating-point values as scaled integers, the **TZEROn**TZEROn keyword is also used when storing unsigned integer values in the field. In this special case the **TSCALn**keyword **shall**TSCALn keyword *shall* have the default value of **1.0** and the **TZEROn**keyword **shall**1.0 and the **TZEROn** keyword *shall* have one of the integer values shown in Table ??.

Since the **binary table** **binary-table** format does not support a native unsigned integer data type (except for the unsigned **8-bit 'B'**eight-bit 'B' column type), the unsigned values are stored in the field as native signed integers with the appropriate integer offset specified by the **TZEROn**TZEROn keyword value shown in the table. For the byte column type, the converse technique can be used to store signed byte values as native unsigned values with the negative **TZEROn**TZEROn offset. In each case, the physical value is computed by adding the offset specified by the **TZEROn**TZEROn keyword to the native data type value that is stored in the table field.

TNULLnTNULLn keywords. The value field for this indexed keyword **shall***shall* contain the integer that represents an undefined value for **field nof data type B, I, J or K, or Por Q**array descriptorField n of Data Type **B, I, J or K, or P or Q** array-descriptor fields (Sect. ??) that point to **B, I, J or K, or P or Q** integer arrays. The keyword **must not***must not* be used if **field n**Field n is of any other data type. The value of this keyword corresponds to the table column values before applying any transformation indicated by the **TSCALn**and **TZEROn**TSCALn and **TZEROn** keywords.

If the **TSCALn**and **TZEROn**TSCALn and **TZEROn** keywords do not have the default values of **1.0** and **0.01.0** and **0.0**, re-

Table 19: Usage of **TZEROn** to represent non-default integer data types.

TFORMn	Native data type	Physical data type	TZEROn	
B 'B'	unsigned	signed byte	-128-128	(-2 ⁷)
I 'I'	signed	unsigned 16-bit	3276832768	(2 ¹⁵)
J 'J'	signed	unsigned 32-bit	21474836482147483648	(2 ³¹)
K 'K'	signed	unsigned 64-bit	92233720368547758089223372036854775808	(2 ⁶³)

spectively, then the value of the **TNULLn** keyword must equal the actual value in the **FITS** file that is used to represent an undefined element and not the corresponding physical value (computed from Eq. ??). To cite a specific, common example, *unsigned* 16-bit integers are represented in a *signed* integer column (with **TFORMn** = 'I' 'I') by setting **TZEROn** = 32768 and **TSCALn** = 1. If it is desired to use elements that have an *unsigned* value (i.e., the physical value) equal to 0 to represent undefined elements in the field, then the **TNULLn** keyword must be set to the value -32768 because that is the actual value stored in the **FITS** file for those elements in the field.

TDISPn keywords. The value field of this indexed keyword shall contain a character string describing the format recommended for displaying an **ASCII** text representation of the contents of field **n**. If the table value has been scaled, the physical value, derived using Eq. ??, shall be displayed. All elements in a field shall be displayed with a single, repeated format. For purposes of display, each byte of bit (type **X**) and byte (type **B**) arrays is treated as an unsigned integer. Arrays of type **A** may be terminated with a zero byte. Only the format codes in Table ??, interpreted as Fortran (?) output formats, and discussed in more detail in Sect. ??, are permitted for encoding. The format codes must be specified in upper case. If the **Bw.m**, **Ow.m**, and **Zw.m** formats are not readily available to the reader, the **Iw.m** display format may be used instead, and if the **ENw.d** and **ESw.d** formats are not available, **Ew.d** may be used. In the case of fields of type **P** or **Q**, the **TDISPn** value applies to the data array pointed to by the array descriptor (Sect. ??), not the values in the array descriptor itself.

THEAP keyword. The value field of this keyword shall contain an integer providing the separation, in bytes, between the start of the main data table and the start of a supplemental data area called the heap. The default value, which is also the minimum allowed value, shall be the product of the values of **NAXIS1** and **NAXIS2**. This keyword shall not be used if the value of **PCOUNT** is zero. The use of this keyword is described in Sect. ??.

TDIMn keywords. The value field of this indexed keyword shall contain a character string describing how to interpret the contents of field **n** as a multi-dimensional array with a format of '(l,m,n,...)' where **l, m, n, ...** are the dimensions of the array. The data are ordered such that the array index of the first dimension given

(**l**) is the most rapidly varying, and that of the last dimension given is the least rapidly varying. The total number of elements in the array equals the product of the dimensions specified in the **TDIMn** keyword. The size must be less than or equal to the repeat count on the **TFORMn** keyword, or, in the case of columns that have a 'P' or 'Q' **TFORMn** data type, less than or equal to the array length specified in the variable-length array descriptor (see Sect. ??). In the special case where the variable-length array descriptor has a size of zero, then the **TDIMn** keyword is not applicable. If the number of elements in the array implied by the **TDIMn** is less than the allocated size of the array in the **FITS** file, then the unused trailing elements should be interpreted as containing undefined fill values.

A character string is represented in a binary table by a one-dimensional character array, as described under 'Character' in the list of data types in Sect. ??). For example, a Fortran **CHARACTER*20** variable could be represented in a binary table as a character array declared as **TFORMn** = '20A'. Arrays of strings, i.e., multi-dimensional character arrays, may be represented using the **TDIMn** notation. For example, if **TFORMn** = '60A' and **TDIMn** = '(5,4,3)', then the entry consists of a 4 × 3 array of strings of five characters each comprising five characters.

The following four keywords may be used to specify minimum and maximum values in numerical columns of a **FITS** ASCII or binary table. These keywords must have the same data type as the physical values in the associated column (either an integer or a floating point number). Any undefined elements in the column or any other IEEE special values in the case of floating point columns shall be excluded when determining the value of these keywords.

TDMINn keywords. The value field shall contain a number giving the minimum physical value contained in column **n** of the table. This keyword is analogous to the **DATAMIN** keyword that is defined for arrays in Sect. ??.

TDMAXn keywords. The value field shall contain a number giving the maximum physical value contained in column **n** of the table. This keyword is analogous to the **DATAMAX** keyword that is defined for arrays in Sect. ??.

TLMINn keywords. The value field shall contain a number that specifies the minimum physical value in column **n** that has a valid meaning or interpretation. The col-

Table 20: Valid **TDISP_n**TDISP_n format values in **BINTABLE**BINTABLE extensions.

Field Value	Data type
Aw Aw	Character
Lw Lw	Logical
Iw.m Iw.m	Integer
Bw.m Bw.m	Binary, integers only
Ow.m Ow.m	Octal, integers only
Zw.m Zw.m	Hexadecimal, integers only
Fw.d Fw.d	Floating-point, fixed decimal notation
Ew.dEe Ew.dEe	Floating-point, exponential notation
ENw.d ENw.d	Engineering; E format with exponent multiple of three
ESw.d ESw.d	Scientific; same as EN but non-zero leading digit if not zero
Gw.dEe Gw.dEe	General; appears as F if significance not lost, else E.
Dw.dEe Dw.dEe	Floating-point, exponential notation

Notes. w is the width in characters of displayed values, m is the minimum number of digits displayed, d is the number of digits to right of decimal, and e is number of digits in exponent. The .m and Ee fields are *optional*.

umn is not **required** *required* to actually contain any elements that have this value, and the column **may** *may* contain elements with physical values less than **TLMIN_n**TLMIN_n, however, the interpretation of any such out-of-range column elements is not defined.

TLMAX_nTLMAX_n keywords. The value field **shall** *shall* contain a number that specifies the maximum physical value in **column n**Column *n* that has a valid meaning or interpretation. The column is not **required** *required* to actually contain any elements that have this value, and the column **may** *may* contain elements with physical values greater than **TLMAX_n**TLMAX_n, however, the interpretation of any such out-of-range column elements is not defined.

The **TLMIN_n**and **TLMAX_n**TLMIN_n and **TLMAX_n** keywords are commonly used when constructing histograms of the data values in a column. For example, if a table contains columns that give the **X and Y** X and Y pixel location of a list of photons that were detected by a **photon counting** photon-counting device, then the **TLMIN_n**and **TLMAX_n**TLMIN_n and **TLMAX_n** keywords could be used **respectively** to specify the minimum and maximum values that the detector is capable of assigning to the **X and Y** X and Y columns.

7.3.3. Data sequence

The data in a **binary table extension** shallbinary-table extension *shall* consist of a main data table**which may, which may**, but need not, be followed by additional bytes in the supplemental data area. The positions in the last data block after the last additional byte, or, if there are no additional bytes, the last character of the last row of the main data table, **shall** *shall* be filled by setting all bits to zero.

7.3.3.1. Main data table

The table is constructed from a two-dimensional byte array. The number of bytes in a row **shall** *shall* be specified by the value of the **NAXIS1**NAXIS1 keyword and the number of rows **shall** *shall* be specified by the **NAXIS2**NAXIS2 keyword of the

associated header. Within a row, fields **shall** *shall* be stored in order of increasing column number, as determined from the **nof** the **TFORM_n** of the TFORM_n keywords. The number of bytes in a row and the number of rows in the table **shall** *shall* determine the size of the byte array. Every row in the array **shall** *shall* have the same number of bytes. The first row **shall** *shall* begin at the start of the data block immediately following the last header block. Subsequent rows **shall** *shall* begin immediately following the end of the previous row, with no intervening bytes, independent of the **FITS**FITS block structure. Words need not be aligned along word boundaries.

Each row in the array **shall** *shall* consist of a sequence of from 0 to 999 fields as specified by the **TFIELDSTFIELDS** keyword. The number of elements in each field and their data type **shall** *shall* be specified by the **TFORM_n**TFORM_n keyword in the associated header. A separate format keyword **must** *must* be provided for each field. The location and format of fields **shall** *shall* be the same for every row. Fields **may** *may* be empty, if the repeat count specified in the value of the **TFORM_n**TFORM_n keyword of the header is **0.0**. Writers of binary tables **should** *should* select a format appropriate to the form, range of values, and accuracy of the data in the table. The following data types, and no others, are permitted.

Logical. If the value of the **TFORM_n**keyword specifies data type **L**TFORM_n keyword specifies Data Type 'L', the contents of field **n**shallField *n* shall consist of ASCII **TT** indicating true or ASCII **FF**, indicating false. A 0 byte (hexadecimal 00) indicates a NULL value.

Bit array. If the value of the **TFORM_n**TFORM_n keyword specifies data type **X'X'**, the contents of field **n**shallField *n* shall consist of a sequence of bits starting with the **most significant** most-significant bit; the bits following **shall** *shall* be in order of decreasing significance, ending with the least significant bit. A bit array **shall** *shall* be composed of an integral number of bytes, with those bits following the end of the data set to zero. No null value is defined for bit arrays.

Character. If the value of the **TFORM_n**keyword specifies data type **A**, field **n**shallTFORM_n keyword specifies Data Type 'A',

Field *n* shall contain a character string of zero or more zero-or-more members, composed of the restricted set of ASCII text ASCII-text characters. This character string may may be terminated before the length specified by the repeat count by an ASCII NULL (hexadecimal code 00). Characters after the first ASCII NULL are not defined. A string with the number of characters specified by the repeat count is not NULL terminated. Null strings are defined by the presence of an ASCII NULL as the first character.

Unsigned 8-Bit integer. If the value of the TFORMnkeyword specifies data type BTFORMn keyword specifies Data Type 'B', the data in field nshallField *n* shall consist of unsigned 8-bit eight-bit integers, with the most significant the most-significant bit first, and subsequent bits in order of decreasing significance. Null values are given by the value of the associated TNULLnTNULLn keyword. Signed integers can be represented using the convention described in Sect. ??.

16-Bit integer. If the value of the TFORMnkeyword specifies data type ITFORMn keyword specifies Data Type 'I', the data in field nshallField *n* shall consist of two's complement signed 16-bit integers, contained in two bytes. The most significant byte shallmost-significant byte shall be first (big-endian byte order). Within each byte the most significant bit shallmost-significant bit shall be first, and subsequent bits shallshall be in order of decreasing significance. Null values are given by the value of the associated TNULLnTNULLn keyword. Unsigned integers can be represented using the convention described in Sect. ??.

32-Bit integer. If the value of the TFORMnkeyword specifies data type JTFORMn keyword specifies Data Type 'J', the data in field nshallField *n* shall consist of two's complement signed 32-bit integers, contained in four bytes. The most significant byte shallmost-significant byte shall be first, and subsequent bytes shallshall be in order of decreasing significance (big-endian byte order). Within each byte, the most significant bit shallmost-significant bit shall be first, and subsequent bits shallshall be in order of decreasing significance. Null values are given by the value of the associated TNULLnTNULLn keyword. Unsigned integers can be represented using the convention described in Sect. ??.

64-Bit integer. If the value of the TFORMnkeyword specifies data type KTFORMn keyword specifies Data Type 'K', the data in field nshallField *n* shall consist of two's complement signed 64-bit integers, contained in eight bytes. The most significant byte shallmost-significant byte shall be first, and subsequent bytes shallshall be in order of decreasing significance. Within each byte, the most significant bit shallmost-significant bit shall be first, and subsequent bits shallshall be in order of decreasing significance (big-endian byte order). Null values are given by the value of the associated TNULLnTNULLn keyword. Unsigned integers can be represented using the convention described in Sect. ??.

Single precision Single-precision floating point. If the value of the TFORMnkeyword specifies data type ETFORMn keyword specifies Data Type 'E', the data in field nshallField *n* shall

consist of ANSI/IEEE-754 (?) 32-bit floating-point numbers, in big-endian byte order, as described in Appendix ??. All IEEE special values are recognized. The IEEE NaN is used to represent null values.

Double precision Double-precision floating point. If the value of the TFORMnkeyword specifies data type DTFORMn keyword specifies Data Type 'D', the data in field nshallField *n* shall consist of ANSI/IEEE-754 (?) 64-bit double precision double-precision floating-point numbers, in big-endian byte order, as described in Appendix ??. All IEEE special values are recognized. The IEEE NaN is used to represent null values.

Single precision complex. If the value of the TFORMnkeyword specifies data type CTFORMn keyword specifies Data Type 'C', the data in field nshallField *n* shall consist of a sequence of pairs of 32-bit single precision single-precision floating-point numbers. The first member of each pair shallshall represent the real part of a complex number, and the second member shallshall represent the imaginary part of that complex number. If either member contains an IEEE NaN, the entire complex value is null.

Double precision Double-precision complex. If the value of the TFORMnkeyword specifies data type MTFORMn keyword specifies Data Type 'M', the data in field nshallField *n* shall consist of a sequence of pairs of 64-bit double precision double-precision floating-point numbers. The first member of each pair shallshall represent the real part of a complex number, and the second member of the pair shallshall represent the imaginary part of that complex number. If either member contains an IEEE NaN, the entire complex value is null.

Array descriptor. The repeat count on the Pand Qarray descriptor fields must P and Q array-descriptor fields must either have a value of 0 0 (denoting an empty field of zero bytes) or 1. 1. If the value of the TFORMnkeyword specifies data type IPTFORMn keyword specifies Data Type 'IP', the data in field nshallField *n* shall consist of one pair of 32-bit integers. If the value of the TFORMnkeyword specifies data type IQTFORMn keyword specifies Data Type 'IQ', the data in field nshallField *n* shall consist of one pair of 64-bit integers. The meaning of these integers is defined in Sect. ??.

7.3.3.2. Bytes following main table

The main data table may may be followed by a supplemental data area called the heap. The size of the supplemental data area, in bytes, is specified by the value of the PCOUNTPCOUNT keyword. The use of this data area is described in Sect. ??.

7.3.4. Data display

The indexed TDISPnkeyword may TDISPn keyword may be used to describe the recommended format for displaying an ASCII text ASCII-text representation of the contents of field nField *n*. The permitted display format codes for each type of data (i.e., character strings, logical, integer, or real) are given in Table ?? and described below.

Character data. If the table column contains a character string (with **TFORMn** $\text{TFORMn} = \text{'rA'}$ 'rA') then the **TDISPn** format code must be **'Aw'** where **w** **TDISPn** format code must be **Aw**, where **w** is the number of characters to display. If the character datum has length less than or equal to **ww**, it is represented on output right-justified in a string of **ww** characters. If the character datum has length greater than **ww**, the first **ww** characters of the datum are represented on output in a string of **ww** characters. Character data are not surrounded by **single or double quotation** marks unless those marks are themselves part of the data value.

Logical data. If the table column contains logical data (with **TFORMn** $\text{TFORMn} = \text{'rL'}$ 'rL') then the **TDISPn** format code must be **'Lw'** where **w** **TDISPn** format code must be **Lw**, where **w** is the width in characters of the display field. Logical data are represented on output with the character **TT** for true or **FF** for false right-justified in a space-filled string of **ww** characters. A null value **may** be represented by a string of **ww** space characters.

Integer data. If the table column contains integer data (with **TFORMn** $\text{TFORMn} = \text{'rX'}$, 'rB' , 'rI' , 'rJ' , or 'rK' 'rX' , 'rB' , 'rI' , 'rJ' , or 'rK') then the **TDISPn** format code may **TDISPn** format code may have any of these forms: **Iw.m**, **Bw.m**, **Ow.m**, or **Zw.m**. **Iw.m**, **Bw.m**, **Ow.m**, or **Zw.m**. The default value of **mm** is one and the **'m'** is optional. The first letter of the code specifies the number base for the encoding with **II** for decimal (10), **BB** for binary (2), **OO** for octal (8), and **ZZ** for hexadecimal (16). Hexadecimal format uses the upper-case letters A through F to represent decimal values 10 through 15. The output field consists of **w** characters containing zero or more **w** characters containing zero-or-more leading spaces followed by a minus sign if the internal datum is negative (only in the case of decimal encoding with the **II** format code), followed by the magnitude of the internal datum in the form of an **unsigned integer unsigned-integer** constant in the specified number base, with only as many leading zeros as are needed to have at least **mm** numeric digits. Note that $\text{mm} \leq \text{ww}$ is allowed if all values are positive, but $\text{mm} < \text{ww}$ is required **w** is required if any values are negative. If the number of digits required to represent the integer datum exceeds **ww**, then the output field consists of a string of **wasterisk (*w asterisk (*)** characters.

Real data. If the table column contains real data (with **TFORMn** $\text{TFORMn} = \text{'rE'}$, or 'rD' 'rE' , or 'rD') or contains integer data (with any of the **TFORMn** TFORMn format codes listed in the previous paragraph) which are recommended, which are recommended to be displayed as real values (i.e., especially in cases where the integer values represent scaled physical values using Eq. ??), then the **TDISPn** format code may **TDISPn** format code may have any of these forms: **Fw.d**, **Ew.dEe**, **Dw.dEe**, **ENw.d**, or **ESw.d**. **Fw.d**, **Ew.dEe**, **Dw.dEe**, **ENw.d**, or **ESw.d**. In all cases, the output is a string of **ww** characters including the decimal point, any sign characters, and any exponent including the exponent's indicators, signs, and values. If the number of digits required to represent the real datum exceeds **ww**, then the output field consists of a string of **wasterisk (*w asterisk (*)** characters. In all cases, **dd** specifies the number of digits to appear to the right of the decimal point.

The **FF** format code output field consists of **w - d - 1** characters containing zero or more leading spaces **w - d - 1** characters containing zero-or-more leading spaces, followed by a minus sign if the internal datum is negative, followed by the absolute magnitude of the internal datum in the form of an **unsigned integer unsigned-integer** constant. These characters are followed by a decimal point (**'.'**) and **d** characters giving the fractional part of the internal datum, rounded by the normal rules of arithmetic to **dd** fractional digits.

For the **Eand DE and D** format codes, an exponent is taken such that the fraction $0.1 \leq |\text{datum}|/10^{\text{exponent}} < 1.00.1 \leq |\text{datum}|/10^{\text{exponent}} < 1.0$. The fraction (with appropriate sign) is output with an **FF** format of width **w - e - 2** characters with **dw - e - 2** characters with **d** characters after the decimal followed by an **Eor DE or D** followed by the exponent as a signed **e + 1 e + 1** character integer with leading zeros as needed. The default value of **e** is 2 when the **E** is 2 when the **E** portion of the format code is omitted. If the exponent value will not fit in **e + 1 e + 1** characters but will fit in **e + 2** then the **E(or De + 2 then the E (or D)** is omitted and the wider field used. If the exponent value will not fit (with a sign character) in **e + 2 e + 2** characters, then the entire **ww**-character output field is filled with asterisks (**).

The **ESES** format code is processed in the same manner as the **EE** format code except that the exponent is taken so that $1.0 \leq \text{fraction} < 101.0 \leq \text{fraction} < 10$.

The **ENEN** format code is processed in the same manner as the **EE** format code except that the exponent is taken to be an integer multiple of three and so that $1.0 \leq \text{fraction} < 1000.01.0 \leq \text{fraction} < 1000.0$. All real format codes have number base 10. There is no difference between **Eand DE and D** format codes on input other than an implication with the latter of greater precision in the internal datum.

The **Gw.dEe** format code may **Gw.dEe** format code may be used with data of any type. For data of type integer, logical, or character, it is equivalent to **Iw, Lw, or Aw** **Iw, Lw, or Aw**, respectively. For data of type real, it is equivalent to an **FF** format (with different numbers of characters after the decimal) when that format will accurately represent the value and is equivalent to an **EE** format when the number (in absolute value) is either very small or very large. Specifically, for real values outside the range $0.1 - 0.5 \times 10^{-d-1} \leq \text{value} < 10^d - 0.50.1 - 0.5 \times 10^{-d-1} \leq \text{value} < 10^d - 0.5$, it is equivalent to **Ew.dEe** **Ew.dEe**. For real values within the above range, it is equivalent to **Fw'.d'** followed by **2+e** **Fw'.d'** followed by **2+e** spaces, where $w' = w - e - 2$ and $d' = d - k$ for $k = 0, 1, \dots, d$ $w' = w - e - 2$ and $d' = d - k$ for $k = 0, 1, \dots, d$ if the real datum value lies in the range $10^{k-1} (1 - 0.5 \times 10^{-d}) \leq \text{value} \leq 10^k (1 - 0.5 \times 10^{-d}) 10^{k-1} (1 - 0.5 \times 10^{-d}) \leq \text{value} \leq 10^k (1 - 0.5 \times 10^{-d})$.

Complex data. If the table column contains complex data (with **TFORMn** $\text{TFORMn} = \text{'rC'}$, or 'rM') then the **may** 'rC' , or 'rM') then they may be displayed with any of the real data formats as described above. The same format is used for the real and imaginary parts. It is recommended recommended that the two values be separated by a comma and enclosed in parentheses with a total field width of $2w + 32w + 3$.

7.3.5. Variable-length arrays

One of the most attractive features of binary tables is that any field of the table can be an array. In the standard case this is a fixed-size array, i.e., a fixed amount of storage is allocated in each row for the array data—whether it is used or not. This is fine so long as the arrays are small or a fixed amount of array data will be stored in each field, but if the stored array length varies for different rows, it is necessary to impose a fixed upper limit on the size of the array that can be stored. If this upper limit is made too large excessive wasted space can result and the **binary table binary-table** mechanism becomes seriously inefficient. If the limit is set too low then storing certain types of data in the table could become impossible.

The variable-length array construct presented here was devised to deal with this problem. Variable-length arrays are implemented in such a way that, even if a table contains such arrays, a simple reader program that does not understand variable-length arrays will still be able to read the main data table (in other words a table containing variable-length arrays conforms to the basic **binary table binary-table** standard). The implementation chosen is such that the rows in the main data table remain fixed in size even if the table contains a variable-length array field, allowing efficient random access to the main data table.

Variable-length arrays are logically equivalent to regular static arrays, the only differences being 1) the length of the stored array can differ for different rows, and 2) the array data are not stored directly in the main data table. Since a field of any data type can be a static array, a field of any data type can also be a variable-length array (excluding the **type Pand QType P and Q** variable-length array descriptors themselves, which are not a data type so much as a storage-class specifier). Other established **FITSFITS** conventions that apply to static arrays will generally apply as well to variable-length arrays.

A variable-length array is declared in the table header with one of the following two special field **data type specifiers data-type specifiers**

rPt(e_{max})rPt(e_{max})

rQt(e_{max})rQt(e_{max})

where the **'P' or 'Q' 'P' or 'Q'** indicates the presence of an array descriptor (described below), the element count **rshouldbe 0, 1, or absent, t** is a character denoting the data type of the array data (**L, X, B, I, J, KL, X, B, I, J, K**, etc., but not **Por QP or Q**), and **e_{max} e_{max}** is a quantity guaranteed to be equal to or greater than the maximum number of elements of type **t** actually stored in any row of the table. There is no built-in upper limit on the size of a stored array (other than the fundamental limit imposed by the range of the array descriptor, defined below); **e_{max} e_{max}** merely reflects the size of the largest array actually stored in the table, and is provided to avoid the need to preview the table when, for example, reading a table containing variable-length elements into a database that supports only fixed-size arrays. There **maymay** be additional characters in the **TFORMnTFORMn** keyword following the **e_{max}e_{max}**.

For example,

TFORM8 = 'PB(1800)' / Variable byte arrayTFORM8 = 'PB(1800) / Variable byte array

indicates that **fieldField** 8 of the table is a variable-length array of type byte, with a maximum stored array length not to exceed 1800 array elements (bytes in this case).

The data for the variable-length arrays in a table are not stored in the main data table; they are stored in a supplemental data area, the heap, following the main data table. What is stored in the main data table field is an *array descriptor*. This consists of two 32-bit signed integer values in the case of **'P' 'P'** array descriptors, or two 64-bit signed integer values in the case of **'Q' 'Q'** array descriptors: the number of elements (array length) of the stored array, followed by the zero-indexed byte offset of the first element of the array, measured from the start of the heap area. The meaning of a negative value for either of these integers is not defined by this **standardStandard**. Storage for the array is contiguous. The array descriptor for **field Field N** as it would appear embedded in a table row is illustrated symbolically below:

... [**field Field N-1**] [(nelem,offset)] [**field Field N+1**] ...

If the stored array length is zero, there is no array data, and the offset value is undefined (it **shouldshould** be set to zero). The storage referenced by an array descriptor **mustmust** lie entirely within the heap area; negative offsets are not permitted.

A binary table containing variable-length arrays consists of three principal segments, as follows: .

[table header] [main data table] (optional gap) [heap area]

The table header consists of one or more 2880-byte header blocks with the last block indicated by the keyword **ENDEND** somewhere in the block. The main data table begins with the first data block following the last header block and is **NAXIS1 × NAXIS2 NAXIS1 × NAXIS2** bytes in length. The zero**indexed -indexed** byte offset to the start of the heap, measured from the start of the main data table, **may may** be given by the **THEAPTHEAP** keyword in the header. If this keyword is missing then the heap begins with the byte immediately following main data table (i.e., the default value of **THEAPis NAXIS1 × NAXIS2THEAP is NAXIS1 × NAXIS2**). This default value is the minimum allowed value for the **THEAPTHEAP** keyword, because any smaller value would imply that the heap and the main data table overlap. If the **THEAPTHEAP** keyword has a value larger than this default value, then there is a gap between the end of the main data table and the start of the heap. The total length in bytes of the supplemental data area following the main data table (gap plus heap) is given by the **PCOUNTPCOUNT** keyword in the table header.

For example, suppose a table contains five rows **which that** are each 168 bytes long, with a heap area 3000 bytes long, beginning at an offset of 2880, thereby aligning the main data table and heap areas on data block boundaries (this alignment is not necessarily recommended but is useful for this example). The data portion of the table consists of three 2880-byte data blocks: the first block contains the 840 bytes from the five rows of the main data table followed by 2040 fill bytes; the heap completely fills the second block; the third block contains the remaining 120 bytes of the heap followed by 2760 fill bytes. **PCOUNTPCOUNT** gives the total number of bytes from the end of the main data table to the end of the heap, and in this example has a value of 2040 + 2880 + 120 = 5040. This is expressed in the table header

NAXIS1 = 168 / Width of table row in bytes
NAXIS2 = 5 / Number of rows in table
PCOUNT = 5040 / Random parameter count

...
 THEAP = 2880 / Byte offset of heap area

The values of **TSCALn** and **TZEROn** for variable-length array column entries are to be applied to the values in the data array in the heap area, not the values of the array descriptor. These keywords can be used to scale data values in either static or variable-length arrays.

7.3.6. Variable-length-array guidelines

While the above description is sufficient to define the required features of the variable-length array implementation, some hints regarding usage of the variable-length array facility might also be useful.

Programs that read binary tables should take care to not assume more about the physical layout of the table than is **required** by the specification. For example, there are no requirements on the alignment of data within the heap. If efficient runtime access is a concern one might want to design the table so that data arrays are aligned to the size of an array element. In another case one might want to minimize storage and forgo any efforts at alignment (by careful design it is often possible to achieve both goals). Variable-length array data **may** be stored in the heap in any order, i.e., the data for row $N+1$ are not necessarily stored at a larger offset than that for row N . There **may** be gaps in the heap where no data are stored. Pointer aliasing is permitted, i.e., the array descriptors for two or more arrays **may** point to the same storage location (this could be used to save storage if two or more arrays are identical).

Byte arrays are a special case because they can be used to store a ‘typeless’ data sequence. Since **FITSFITS** is a machine-independent storage format, some form of machine-specific data conversion (byte swapping, floating-point format conversion) is implied when accessing stored data with types such as integer and floating, but byte arrays are copied to and from external storage without any form of conversion.

An important feature of variable-length arrays is that it is possible that the stored array length **may** be zero. This makes it possible to have a column of the table for which, typically, no data are present in each stored row. When data are present, the stored array can be as large as necessary. This can be useful when storing complex objects as rows in a table.

Accessing a binary table stored on a **random access** storage medium is straightforward. Since the rows of data in the main data table are fixed in size they can be randomly accessed given the row number, by computing the offset. Once the row has been read in, any variable-length array data can be directly accessed using the element count and offset given by the array descriptor stored in that row.

Reading a binary table stored on a **sequential access** storage medium requires that a table of array descriptors be built up as the main data table rows are read in. Once all the table rows have been read, the array descriptors are sorted by the offset of the array data in the heap. As the heap data are read, arrays are extracted sequentially from the heap and stored in the affected rows using the back pointers to the row and field from the table of array descriptors. Since array aliasing is permitted, it might be necessary to store a given array in more than one field or row.

Variable-length arrays are more complicated than regular static arrays and might not be supported by some software systems. The producers of **FITSFITS** data products should consider the capabilities of the likely recipients of their files when deciding whether or not to use this format, and as a general rule should use it only in cases where it provides significant advantages over the simpler fixed-length array format. In particular, the use of variable-length arrays might present difficulties for applications that ingest the **FITSFITS** file via a sequential input stream, because the application cannot fully process any rows in the table until after the entire fixed-length table, and potentially the entire heap has been transmitted as outlined in the previous paragraph.

8. World coordinate World-coordinate systems

Representations of the mapping between image coordinates and physical (i.e., world) coordinate systems (WCSs) **may** be represented within **FITSFITS** HDUs. The keywords that are used to express these mappings are now rigorously defined in a series of papers on **world coordinate** systems (?), **celestial coordinate** systems (?), **spectral coordinate** systems (?), and **time coordinate** systems (?). An additional spherical projection, called HEALPix, is defined in reference (?). These WCS papers have been formally approved by the IAUFWG and therefore are *incorporated by reference* as an official part of this Standard. The reader should refer to these papers for additional details and background information that cannot be included here. Various updates and corrections to the primary WCS papers have been compiled by the authors, and are reflected in this section. Therefore, where conflicts exist, the description in this Standard will prevail.

8.1. Basic concepts

Rather than store world coordinates separately for each datum, the regular lattice structure of a **FITSFITS** image offers the possibility of defining rules for computing world coordinates at each point. As stated in Sect. ?? and depicted in Fig. ??, image array data are addressed via *integral array indices* that range in value from 1 to $NAXIS_j$ on *axis* $Axis\ j$. Recognizing that image data values may have an extent, for example an angular separation, spectral channel width or time span, and thus that it may make sense to interpolate between them, these integral array indices **may** be generalized to floating-point *pixel coordinates*. Integral **pixel coordinate** values coincide with the corresponding array indices, while fractional **pixel coordinate** values lie between array indices and thus imply interpolation. **Pixel coordinate** values are defined at all points within the image lattice and outside it (except along *conventional* axes, see Sect. ??). They form the basis of the **world coordinate formalism in FITS** depicted schematically in Fig. ??.

The essence of representing **world coordinate systems in FITS** is the association of various reserved keywords with elements of a transformation (or a series of transformations), or with parameters of a projection function. The conversion from pixel coordinates in the data array to world coordinates is simply a matter of applying the specified transformations (in order) via the appropriate keyword values;

Fig. 2: A schematic view of converting pixel coordinates to world coordinates.

conversely, defining a WCS for an image amounts to solving for the elements of the transformation matrix(es) or coefficients of the function(s) of interest and recording them in the form of WCS keyword values. The description of the WCS systems and their expression in FITS HDUs is quite extensive and detailed, but is aided by a careful choice of notation. Key elements of the notation are summarized in Table ??, and are used throughout this section. The formal definitions of the keywords appear in the following subsections.

The conversion of image pixel coordinates to world coordinates is a multi-step process, as illustrated in Fig. ??.

For all coordinate types, the first step is a linear transformation applied via matrix multiplication of the vector of pixel coordinate elements, p_j :

$$q_i = \sum_{j=1}^N m_{ij}(p_j - r_j) \quad (9)$$

where r_j are the pixel coordinate elements of the reference point, j indexes the pixel axis, and i the world axis. The m_{ij} matrix is a non-singular, square matrix of dimension $N \times N$, where N is the number of world coordinate axes. The elements q_i of the resulting intermediate pixel coordinate vector are offsets, in dimensionless pixel units, from the reference point along axes coincident with those of the intermediate world coordinates. Thus, the conversion of q_i to the corresponding intermediate world coordinate element x_i is a simple scale:

$$x_i = s_i q_i. \quad (10)$$

There are three conventions for associating FITS keywords with the above transformations. In the first formalism, the matrix elements m_{ij} are encoded in the $PCi.j$ keywords

and the scale factors s_i are encoded in the $CDELTi$ keywords, which must have non-zero values. In the second formalism Eqs. (??) and (??) are combined as

$$x_i = \sum_{j=1}^N (s_i m_{ij})(p_j - r_j) \quad (11)$$

and the $CDi.j$ keywords encode the product $s_i m_{ij}$. The third convention was widely used before the development of the two previously described conventions and uses the $CDELTi$ keywords to define the image scale and the **CROTA2 keyword to define CROTA2 keyword to specify** a bulk rotation of the image plane. Use of the **CROTA2CROTA2** keyword is now deprecated, and instead the newer $PCi.j$ or $CDi.j$ keywords are recommended because they allow for skewed axes and fully general rotation of multi-dimensional arrays. The $CDELTi$ and **CROTA2 keywords may** co-exist with the $CDi.j$ keywords (but the **CROTA2 must not** occur with the $PCi.j$ keywords) as an aid to old FITS interpreters, but these keywords must be ignored by software that supports the $CDi.j$ keyword convention. In all these formalisms the reference pixel coordinates r_j are encoded in the $CRPIXi$ keywords, and the world coordinates at the reference point are encoded in the $CRVALi$ keywords. For additional details, see ?.

The third step of the process, computing the final world coordinates, depends on the type of coordinate system, which is indicated with the value of the $CTYPEi$ keyword. For some simple, linear cases an appropriate choice of normalization for the scale factors allows the world coordinates to be taken directly (or by applying a constant offset) from the x_i (e.g., some spectra). In other cases it is more complicated, and may require the application of some non-linear algorithm (e.g., a projection, as for celestial coordinates), which may require the specification of additional parameters. Where necessary, numeric parameter values for non-linear algorithms must be specified via $PVi.m$ keywords and character-valued parameters will be specified via $PSi.m$ keywords, where m is the parameter number.

The application of these formalisms to coordinate systems of interest is discussed in the following sub-sections: Sect. ?? describes general WCS representations (see ?), Sect. ?? describes celestial coordinate systems (see ??), Sect. ?? describes spectral coordinate systems (see ?), and Sect. ?? describes the representation of time coordinates (see ?).

8.2. World coordinate system representations

A variety of keywords have been reserved for computing the coordinate values that are to be associated with any pixel location within an array. The full set is given in Table ??; those in most common usage are defined in detail below for convenience. Coordinate system specifications may appear in HDUs that contain simple images in the primary array or in an image extension. Images may also be stored in a multi-dimensional vector cell of a binary table, or as a tabulated list of pixel locations (and optionally, the pixel value) in a table. In these last two types of image representations, the WCS keywords have a different naming convention, which reflects the needs of the tabular data structure and the 8-character limit for keyword lengths, but other-

Table 21: WCS and celestial coordinates notation.

Variable(s)	Meaning	Related FITS FITS keywords
i	Index variable for world coordinates	
j	Index variable for pixel coordinates	
a	Alternative WCS version code	
p_j	Pixel coordinates	
r_j	Reference pixel coordinates	CRPIX j
m_{ij}	Linear transformation Linear-transformation matrix	CDi_ j a or PCi_ j a
s_i	Coordinate scales	CDELTi a
(x, y)	Projection plane coordinates	
(ϕ, θ)	Native longitude and latitude	
(α, δ)	Celestial longitude and latitude	
(ϕ_0, θ_0)	Native longitude and latitude of the fiducial point	PVi_1 a^\dagger , PVi_2 a^\dagger
(α_0, δ_0)	Celestial longitude and latitude of the fiducial point	CRVALi a
(α_p, δ_p)	Celestial longitude and latitude of the native pole	
(ϕ_p, θ_p)	Native longitude and latitude of the celestial pole	LONPOLE a (=PVi_3 a^\dagger), LATPOLE a (=PVi_4 a^\dagger)

Notes. † Associated with *Longitude Axis i*.

wise follow exactly the same rules for type, usage, and default values. See reference ? for example usage of these keywords. All forms of these reserved keywords **must** be used only as specified in this Standard.

In the case of the **binary table binary-table** vector representation, it is possible that the images contained in a given column of the table have different coordinate transformation values. Table 9 of ? illustrates a technique (commonly known as the ‘‘Green Bank Convention¹⁰’’), which utilizes additional columns in the table to record the **coordinate transformation coordinate-transformation** values that apply to the corresponding image in each row of the table. More information is provided in Appendix ??.

The keywords given below constitute a complete set of fundamental attributes for a WCS description. Although their inclusion in an HDU is optional, **FITS writers should** *FITS writers should* include a complete set of keywords when describing a WCS. In the event that some keywords are missing, default values **must** be assumed, as specified below.

WCSAXES – [integer; default: NAXIS, or larger of WCS **indices indices i** or j]. Number of axes in the WCS description. This keyword, if present, **must** precede all WCS keywords except NAXIS in the HDU. The value of WCSAXES **may** exceed the number of pixel axes for the HDU.

CTYPEi – [string; indexed; default: ‘_’ (i.e. a linear, undefined axis)]. Type for the **intermediate coordinate axis Intermediate-coordinate Axis i**. Any coordinate type that is not covered by this **standard Standard** or an officially recognized **FITS convention shall** *FITS convention shall* be taken to be linear. All non-linear coordinate system names **must** be expressed in ‘4–3’ form: the first four characters specify the coordinate type, the fifth character is a hyphen (‘-’), and the remaining three characters specify an algorithm code for computing the world coordinate value. Coordinate types with names of **less fewer** than four characters are padded on the right with hyphens, and algorithm codes with **less fewer**

¹⁰ Named after a meeting held in Green Bank, West Virginia, USA in 1989 to develop standards for the interchange of **single dish radio astronomy single-dish radio-astronomy** data.

than three characters are padded on the right with blanks¹¹. Algorithm codes **should** be three characters.

CUNITi – [string; indexed; default: ‘_’ (i.e., undefined)]. Physical units of CRVAL and CDELTi for **axis i Axis i**. Note that units **should** always be specified (see Sect. ??). Units for celestial coordinate systems defined in this Standard **must** be degrees.

CRPIXj – [floating point; indexed; default: 0.00.0]. Location of the reference point in the image for **axis Axis j** corresponding to r_j in Eq. (??). Note that the reference point **may** lie outside the image and that the first pixel in the image has pixel coordinates (1.0, 1.0, ...).

CRVALi – [floating point; indexed; default: 0.00.0]. **World Coordinate World-coordinate** value at the reference point of **axis Axis i**.

CDELTi – [floating point; indexed; default: 1.01.0]. Increment of the world coordinate at the reference point for **axis Axis i**. The value **must not** be zero.

CROTAi – [floating point; indexed; default: 0.00.0]. The amount of rotation from the standard coordinate system to a different coordinate system. Further use of this of this keyword is deprecated, in favor of the newer formalisms that use the CDi_ j or PCi_ j keywords to define the rotation.

PCi_j – [floating point; defaults: 1.0 1.0.0 when $i = j$, 0.0 0.0 otherwise]. Linear transformation matrix between **pixel axes Pixel Axes j** and **intermediate coordinate axes Intermediate-coordinate Axes i**. The PCi_ j matrix **must not** be singular.

CDi_j – [floating point; defaults: 0.00.0, but see below]. Linear transformation matrix (with scale) between **pixel axes Pixel Axes j** and **intermediate coordinate axes Intermediate-coordinate Axes i**. This nomenclature is equivalent to PCi_ j when CDELTi is unity. The CDi_ j matrix **must not** be singular. Note that the CDi_ j formalism is an exclusive alternative to PCi_ j , and the CDi_ j and PCi_ j keywords **must not** appear together within an HDU.

In addition to the restrictions noted above, if any CDi_ j keywords are present in the HDU, all other unspecified CDi_ j keywords **shall** default to zero. If no CDi_ j keywords are present

¹¹ Example: ‘RA---UV ’ RA---UV ’.

Table 22: Reserved WCS keywords (continues on next page)

Keyword Description	Global	Image	BINTABLE vector		Pixel list	
			Primary	Alternative	Primary	Alternative
Coordinate dimensionality		WCSAXESa		WCAXna		...
Axis type		CTYPEia	iCTYPn	iCTYna	TCTYPn	TCTYna
Axis units		CUNITia	iCUNIIn	iCUNna	TCUNIIn	TCUNna
Reference value		CRVALia	iCRVLn	iCRVna	TCRVLn	TCRVna
Coordinate increment		CDELTi	iCDLTn	iCDEna	TCDLTn	TCDEna
Reference point		CRPIXja	jCRPXn	jCRPna	TCRPXn	TCRPna
Coordinate rotation ¹		CROTAi	iCROTn		TCROTn	
Transformation matrix ²		PCi_ja		ijPCna		TPCn_ka or TPn_ka
Transformation matrix ²		CDi_ja		ijCDna		TCDn_ka or TCn_ka
Coordinate parameter		PVi_ma		iPVn_ma or iVn_ma		TPVn_ma or TVn_ma
Coordinate parameter array		...		iVn_Xa		...
Coordinate parameter		PSi_ma		iPSn_ma or iSn_ma		TPSn_ma or TSn_ma
Coordinate name		WCSNAMEa		WCSNna		WCSna or TWCSna
Coordinate axis name		CNAMEia		iCNAa		TCNAa
Random error		CRDERia		iCRDna		TCRDna
Systematic error		CSYERia		iCSYna		TCSYna
WCS cross-reference target		...		WCSTna		...
WCS cross reference		...		WCSXna		...
Coordinate rotation		LONPOLEa		LONPna		LONPna
Coordinate rotation		LATPOLEa		LATPna		LATPna
Coordinate epoch		EQUINOXa		EQUIna		EQUIna
Coordinate epoch ³	EPOCH			EPOCH		EPOCH
Reference frame	RADECSYS	RADECSYS ⁴	RADESYSa	RADEna		RADEna
Line rest frequency (Hz)	RESTFREQ ⁴		RESTFRQa	RFRQna		RFRQna
Line rest vacuum wavelength (m)			RESTWAVa	RWAVna		RWAVna
Spectral reference frame			SPECSYSa	SPECna		SPECna
Spectral reference frame			SSYSOBSa	SOBSna		SOBSna
Spectral reference frame			SSYSSRCa	SSRCna		SSRCna
Observation X (m)	OBSGEO-X ⁵			OBSGXn		OBSGXn
Observation Y (m)	OBSGEO-Y ⁵			OBSGYn		OBSGYn
Observation Z (m)	OBSGEO-Z ⁵			OBSGZn		OBSGZn
Radial velocity (m s ⁻¹)			VELOSYSa	VSYSna		VSYSna
Redshift of source			ZSOURCEa	ZSOUNa		ZSOUNa
Angle of true velocity			VELANGLa	VANGna		VANGna
Date-time related keywords (see Sect.??)						
Date of HDU creation	DATE					
Date/time of observation	DATE-OBS			DOBSn		DOBSn
	MJD-OBS			MJDOBn		MJDOBn
	BEPOCH					
	JEPOCH					
Average date/time of observation	DATE-AVG			DAVGn		DAVGn
	MJD-AVG			MJDAn		MJDAn
Start date/time of observation	DATE-BEG					
	MJD-BEG					
	TSTART					
End date/time of observation	DATE-END					
	MJD-END					
	TSTOP					
Net exposure duration	XPOSURE					Wall clock
Wall-clock exposure duration	TELAPSE					
Time scale	TIMESYS	CTYPEia	iCTYPn	iCTYna	TCTYPn	TCTYna
Time zero-point zero point (MJD)	MJDREF ⁶					
Time zero-point zero point (JD)	JDREF ⁶					
Time zero-point zero point (ISO)	DATEREF					
Reference position	TREFPOS			TRPOSn		TRPOSn
Reference direction	TREFDIR			TRDIRn		TRDIRn
Solar system System ephemeris	PLEPHEM					
Time unit	TIMEUNIT	CUNITia	iCUNIIn	iCUNna	TCUNIIn	TCUNna
Time offset	TIMEOFFS					
Time absolute error	TIMSYER	CSYERia	iCSYEn	iCSYna	TCSYn	TCSYna
Time relative error	TIMRDER	CRDERia	iCRDEn	iCRDna	TCRDn	TCRDna
Time resolution	TIMEDEL					
Time location in pixel	TIMEPIXR					
Phase axis Phase-axis zero point		CZPHSia	iCZPHn	iCZPna	TCZPHn	TCZPna
Phase axis Phase-axis period		CPERia	iCPERn	iCPRna	TCPERn	TCPRna

Table ?? (continued)

Notes. The indices j and i are pixel and intermediate-world-coordinate axis numbers, respectively. Within a table, the index n refers to a column number, and m refers to a coordinate parameter number. The index k also refers to a column number. The indicator a is either blank (for the primary coordinate description) or a character A through Z that specifies the coordinate version. See the text.

⁽¹⁾ CROTA i form is deprecated but still in use. It *must not* be used with PC i _ j , PV i _ m , and PS i _ m . ⁽²⁾ PC i _ j and CD i _ j forms of the transformation matrix are mutually exclusive, and *must not* appear together in the same HDU. ⁽³⁾ EPOCH is deprecated. Use EQUINOX instead. ⁽⁴⁾ These eight-character keywords are deprecated; the seven-character forms, which can include an alternate version code letter at the end, *should* be used instead. ⁽⁵⁾ For the purpose of time reference position, geodetic latitude/longitude/elevation OBSGEO-B, OBSGEO-L, OBSGEO-H or an orbital-ephemeris keyword OBSORBIT can be also used (see Sect. ??). ⁽⁶⁾ [M]JDREF can be split in integer and fractional values [M]JDREFI and [M]JDREFF as explained in Sect. ??.

then the header *shall* be interpreted as being in PC i _ j form whether or not any PC i _ j keywords are actually present in the HDU.

Some non-linear algorithms that describe the transformation between pixel and **intermediate coordinate intermediate-coordinate** axes require parameter values. A few non-linear algorithms also require character-valued parameters, e.g., table lookups require the names of the table extension and the columns to be used. Where necessary parameter values *must* be specified via the following keywords: .

PV i _ m – [floating point]. Numeric parameter values for **intermediate world coordinate axis Intermediate-world-coordinate Axis** i , where m is the parameter number. Leading zeros *must not* be used, and m *may* have only values in the range 0 through 99, and that are defined for the particular non-linear algorithm.

PS i _ m – [string]. Character-valued parameters for **intermediate world coordinate axis Intermediate-world-coordinate Axis** i , where m is the parameter number. Leading zeros *must not* be used, and m *may* have only values in the range 0 through 99, and that are defined for the particular non-linear algorithm.

The following keywords, while not essential for a complete specification of an image WCS, can be extremely useful for readers to interpret the accuracy of the WCS representation of the image.

CRDER i – [floating point; default: 0.00.0]. Random error in **coordinate Coordinate** i , which *must* be non-negative.

CSYER i – [floating point; default: 0.00.0]. Systematic error in **coordinate Coordinate** i , which *must* be non-negative.

These values *should* give a representative average value of the error over the range of the coordinate in the HDU. The total error in the coordinates would be given by summing the individual errors in quadrature.

8.2.1. Alternative WCS axis descriptions

In some cases it is useful to describe an image with more than one coordinate type¹². Alternative WCS descriptions *may* be added to the header by adding the appropriate sets of WCS keywords, and appending to all keywords in each set an alphabetic code in the range **A through Z A through Z**. Keywords that may be used in this way to specify a coordinate system version are indicated in Table ?? with the suffix a . All implied keywords with

¹² Examples include the frequency, velocity, and wavelength along a spectral axis (only one of which, of course, could be linear), or the position along an imaging detector in both meters and degrees on the sky.

this encoding are *reserved keywords*, and *must only* be used in **FITS FITS** HDUs as specified in this Standard. The axis numbers *must* lie in the range 1 through 99, and the coordinate parameter m *must* lie in the range 0 through 99, both with no leading zeros.

The *primary* version of the WCS description is that specified with **aa** as the blank character¹³. Alternative axis descriptions are optional, but *must not* be specified unless the primary WCS description is also specified. If an alternative WCS description is specified, all coordinate keywords for that version *must* be given even if the values do not differ from those of the primary version. Rules for the default values of alternative coordinate descriptions are the same as those for the primary description. The alternative descriptions are computed in the same fashion as the primary coordinates. The type of coordinate depends on the value of CTYPE i a , and may be linear in one of the alternative descriptions and non-linear in another.

The alternative version codes are selected by the **FITS FITS** writer; there is no requirement that the codes be used in alphabetic sequence, nor that one coordinate version differ in its parameter values from another. An optional keyword WCSNAME a is also defined to name, and otherwise document, the various versions of WCS descriptions: .

WCSNAME a – [string; default for **aa**: ' ' (i.e., blank, for the primary WCS, else a character **A through Z A through Z** that specifies the coordinate version]. Name of the **world coordinate world-coordinate** system represented by the WCS keywords with the suffix aa . Its primary function is to provide a means by which to specify a particular WCS if multiple versions are defined in the HDU.

8.3. Celestial coordinate system Celestial-coordinate-system representations

The conversion from intermediate world coordinates (x, y) in the plane of projection to celestial coordinates involves two steps: a spherical projection to native longitude and latitude (ϕ, θ) , defined in terms of a convenient coordinate system (i.e., *native spherical coordinates*), followed by a spherical rotation of these native coordinates to the required celestial coordinate system (α, δ) . The algorithm to be used to define the spherical projection *must* be encoded in the CTYPE i keyword as the three-letter algorithm code, the allowed values for which are specified in Table ?? and defined in references ? and ?. The target **celestial**

¹³ There are a number of keywords (e.g. *ijPCna*) where the **aa** could be pushed off the **8-char eight-character** keyword name for plausible values of *ii, jj, kk, nn, mm*. In such cases **aa** is still said to be ‘blank’ although it is not the blank character.

Table 23: Reserved **celestial coordinate algorithm** **celestial-coordinate-algorithm** codes.

Code	Default		Properties ¹	Projection name
	ϕ_0	θ_0		
Zenithal (azimuthal) projections				
AZP	0°	90°	Sect. 5.1.1	Zenithal perspective
SZP	0°	90°	Sect. 5.1.2	Slant zenithal perspective
TAN	0°	90°	Sect. 5.1.3	Gnomonic
STG	0°	90°	Sect. 5.1.4	Stereographic
SIN	0°	90°	Sect. 5.1.5	Slant orthographic
ARC	0°	90°	Sect. 5.1.6	Zenithal equidistant
ZPN	0°	90°	Sect. 5.1.7	Zenithal polynomial
ZEA	0°	90°	Sect. 5.1.8	Zenithal equal-area
AIR	0°	90°	Sect. 5.1.9	Airy
Cylindrical projections				
CYP	0°	0°	Sect. 5.2.1	Cylindrical perspective
CEA	0°	0°	Sect. 5.2.2	Cylindrical equal area
CAR	0°	0°	Sect. 5.2.3	Plate carrée
MER	0°	0°	Sect. 5.2.4	Mercator
Pseudo-cylindrical and related projections				
SFL	0°	0°	Sect. 5.3.1	Samson-Flamsteed
PAR	0°	0°	Sect. 5.3.2	Parabolic
MOL	0°	0°	Sect. 5.3.3	Mollweide
AIT	0°	0°	Sect. 5.3.4	Hammer-Aitoff
Conic projections				
COP	0°	θ_a	Sect. 5.4.1	Conic perspective
COE	0°	θ_a	Sect. 5.4.2	Conic equal-area
COD	0°	θ_a	Sect. 5.4.3	Conic equidistant
COO	0°	θ_a	Sect. 5.4.4	Conic orthomorphic
Polyconic and pseudoconic projections				
BON	0°	0°	Sect. 5.5.1	Bonne's equal area
PCO	0°	0°	Sect. 5.5.2	Polyconic
Quad-cube projections				
TSC	0°	0°	Sect. 5.6.1	Tangential spherical cube
CSC	0°	0°	Sect. 5.6.2	COBE quadrilateralized spherical cube
QSC	0°	0°	Sect. 5.6.3	Quadrilateralized spherical cube
HEALPix grid projection				
HPX	0°	0°	Sect. 6 ²	HEALPix grid

⁽¹⁾ Refer to the indicated section in ? for a detailed description. ⁽²⁾ This projection is defined in ?.

coordinate celestial-coordinate system is also encoded into the left-most portion of the CTYPE_{*i*} keyword as the coordinate type.

For the final step, the parameter LONPOLE_{*a*} **must must** be specified, which is the native longitude of the celestial pole, ϕ_p . For certain projections (such as cylindricals and conics, which are less commonly used in astronomy), the additional keyword LATPOLE_{*a*} **must must** be used to specify the native latitude of the celestial pole. See ? for the transformation equations and other details.

The accepted **celestial coordinate celestial-coordinate** systems are: the standard equatorial (RA-- and DEC-RA-- and DEC-), and others of the form x LONLON and x LATLAT for longitude-latitude pairs, where x is GG for Galactic, EE for ecliptic, HH for helioecliptic and SS for supergalactic coordinates. Since the representation of **planetary, lunar, and solar coordinate planetary-, lunar-, and solar-coordinate** systems could exceed the 26 possibilities afforded by the single character x , pairs of the form yz LNLN and yz LTmayLT may be used as well.

RADESYS_{*a*} – [string; default: 'FK4', 'FK5', or 'ICRS' 'FK4', 'FK5', or 'ICRS': see below]. Name of the reference frame of equatorial or ecliptic coordinates, whose value **must must** be one of those specified in Table ?? . The default value is **FK4** 'FK4' if the value of EQUINOX_{*a*} < 1984.0, **FK5** if 'FK5' if 'EQUINOX'_{*a*} ≥ 1984.0, or **ICRS** if 'ICRS' if 'EQUINOX'_{*a*} is not given.

EQUINOX_{*a*} – [floating point; default: see below]. Epoch of the mean equator and equinox in years, whose value **must must** be non-negative. The interpretation of epoch depends upon the value of RADESYS_{*a*} if present: *Besselian* if the value is **FK4** or **FK4-NO-E** 'FK4' or 'FK4-NO-E', *Julian* if the value is **FK5**; 'FK5'; and *not applicable* if the value is **ICRS** or **GAPPT** 'ICRS' or 'GAPPT'.

EPOCH – [floating point]. This keyword is deprecated and **should not should not** be used in new **FITS** files. It is reserved primarily to prevent its use with other meanings. The EQUINOXEQUINOX keyword **shall shall** be used instead. The value field of this keyword was previously defined to contain a floating-point number giving the equinox in years for the

celestial coordinate celestial-coordinate system in which positions are expressed.

DATE-OBS – [floating point]. This reserved keyword is defined in Sect. ??.

MJD-OBS – [floating point; default: DATE-OBS if given, otherwise no default]. Modified Julian Date (JD – – 2,400,000.5) of the observation, whose value corresponds (by default) to the *start* of the observation, unless another interpretation is explained in the comment field. No specific time system (e.g. UTC, TAI, etc.) is defined for this or any of the other time-related keywords. It is recommended that the TIMESYS keyword, as defined in Sect. ?? be used to specify the time system. See also Sect. ??.

LONPOLEa – [floating point; default: ϕ_0 if $\delta_0 \geq \theta_0$, $\phi_0 + 180^\circ$ otherwise]. Longitude in the native coordinate system of the celestial system’s north pole. Normally, ϕ_0 is zero unless a non-zero value has been set for PVi_1aPVi_1a, which is associated with the *longitude* axis. This default applies for all values of θ_0 , including $\theta_0 = 90^\circ$, although the use of non-zero values of θ_0 are discouraged in that case.

LATPOLEa – [floating point; default: 90°, or no default if $(\theta_0, \delta_0, \phi_p - \phi_0) = (0, 0, \pm 90^\circ)$]. Latitude in the native coordinate system of the celestial system’s north pole, or equivalently, the latitude in the celestial coordinate celestial-coordinate system of the native system’s north pole. May This keyword may be ignored or omitted in cases where LONPOLEa completely specifies the rotation to the target celestial system.

8.4. Spectral coordinate system Spectral-coordinate-system representations

This section discusses the conversion of intermediate world coordinates to spectral coordinates with common axes such as frequency, wavelength, and apparent radial velocity (represented here with the coordinate variables ν , λ , or ν). The key point for constructing spectral WCS in FITS is that one of these coordinates must be sampled linearly in the dispersion axis; the others are derived from prescribed, usually non-linear transformations. Frequency and wavelength axes may also be sampled linearly in their logarithm.

Following the convention for the CTYPEia keyword, when *i* is the spectral axis the first four characters must specify a code for the coordinate type; for non-linear algorithms the fifth character must be a hyphen, and the next three characters must specify a predefined algorithm for computing the world coordinates from the intermediate physical coordinates. The coordinate type must be one of those specified in Table ?. When the algorithm is linear, the remainder of the CTYPEia keyword must be blank. When the algorithm is non-linear, the 3-letter algorithm code must three-letter algorithm code must be one of those specified in Table ?. The relationships between the basic physical quantities ν , λ , and ν , as well as the relationships between various derived quantities are given in reference ?.

The generality of the algorithm for specifying the spectral coordinate spectral-coordinate system and its representation suggests that some additional description of the coordinate may be helpful beyond what can be encoded in the first four characters of the CTYPEia keyword; CNAMEia is reserved for this purpose. Note that this keyword provides a name for an axis in a

Table 24: Allowed values of RADESYSa.

Value	Definition
'ICRS'	International Celestial Reference System
'FK5'	Mean place, new (IAU 1984) system
'FK4' ¹	Mean place, old (Bessel-Newcomb) system
'FK4-NO-E' ¹	Mean place: but without eccentricity terms
'GAPPT'	Geocentric apparent place, IAU 1984 system

⁽¹⁾ New FITS files should avoid using these older reference systems.

particular WCS, while the WCSNAMEa keyword names the particular WCS as a whole. In order to convert between some form of radial velocity and either frequency or wavelength, the keywords RESTFRQa and RESTWAVa, respectively, are reserved.

CNAMEia – [string; default: default: '┘' (i.e. a linear, undefined axis)]. Spectral coordinate description which must not Spectral-coordinate description that must not exceed 68 characters in length.

RESTFRQa – [floating point; default: none]. Rest frequency of the of the spectral feature of interest. The physical unit must be Hz.

RESTWAVa – [floating point; default: none]. Vacuum rest wavelength of the of the spectral feature of interest. The physical unit must be m.

One or the other of RESTFRQa or RESTWAVa should be given when it is meaningful to do so.

8.4.1. Spectral coordinate Spectral-coordinate reference frames

Frequencies, wavelengths, and apparent radial velocities are always referred to some selected standard of rest (i.e., reference frame). While the spectra are obtained they are, of necessity, in the observer’s rest frame. The velocity correction from topocentric (the frame in which the measurements are usually made) to standard reference frames (which must be one of those given in Table ??) are dependent on the dot product with time-variable velocity vectors. That is, the velocity with respect to a standard reference frame depends upon direction, and the velocity (and frequency and wavelength) with respect to the local standard of rest is a function of the celestial coordinate within the image. The keywords SPECSYSa and SSYSOBSa are reserved and, if used, must describe the reference frame in use for the spectral axis spectral-axis coordinate(s) and the spectral reference frame that was held constant during the observation, respectively. In order to compute the velocities it is necessary to have the date and time of the observation; the keywords DATE-AVG and MJD-AVG are reserved for this purpose. See also Sect. ??.

DATE-AVG – [string; default: none]. Calendar date of the mid-point of the observation, expressed in the same way as the DATE-OBS keyword.

MJD-AVG – [floating point; default: none]. Modified Julian Date (JD – – 2,400,000.5) of the mid-point of the observation.

SPECSYSa – [string; default: none]. The reference frame in use for the spectral axis spectral-axis coordinate(s). Valid values are given in Table ??.

SSYSOBSa – [string; default: 'TOPOCENT' 'TOPOCENT']. The spectral reference frame that is constant over the range of

Table 25: Reserved **spectral coordinate** **spectral-coordinate** type codes.

Code ¹	Type	Symbol	Assoc. variable	Associated variable	Default units
FREQ	Frequency	ν		ν	Hz
ENER	Energy	E		ν	J
WAVN	Wavenumber	κ		ν	m^{-1}
VRAD	Radio velocity ²	V		ν	m s^{-1}
WAVE	Vacuum wavelength	λ		λ	m
VOPT	Optical velocity ²	Z		λ	m s^{-1}
ZOPT	Redshift	z		λ	...
AWAV	Air wavelength	λ_a		λ_a	m
VELO	Apparent radial velocity	v		v	m s^{-1}
BETA	Beta factor (v/c)	β		v	...

⁽¹⁾ Characters 1 through 4 of the value of the keyword CTYPE*a*. ⁽²⁾ By convention, the ‘radio’ velocity is given by $c(\nu_0 - \nu)/\nu_0$ and the ‘optical’ velocity is given by $c(\lambda - \lambda_0)/\lambda_0$.

the non-spectral world coordinates. Valid values are given in Table ??.

The transformation from the rest frame of the observer to a standard reference frame requires a specification of the location on Earth¹⁴ of the instrument used for the observation in order to calculate the diurnal Doppler correction due to the Earth’s rotation. The location, if specified, **shall** be represented as a geocentric Cartesian triple with respect to a standard ellipsoidal geoid at the time of the observation. While the position can often be specified with an accuracy of a meter or better, for most purposes positional errors of several kilometers will have negligible impact on the computed velocity correction. For details, see reference ?.

OBSGEO-X – [floating point; default: none]. *X*-coordinate (in meters) of a Cartesian triplet that specifies the location, with respect to a standard, geocentric terrestrial reference frame, where the observation took place. The coordinate **must** be valid at the epoch MJD-AVG or DATE-AVG.

OBSGEO-Y – [floating point; default: none]. *Y*-coordinate (in meters) of a Cartesian triplet that specifies the location, with respect to a standard, geocentric terrestrial reference frame, where the observation took place. The coordinate **must** be valid at the epoch MJD-AVG or DATE-AVG.

OBSGEO-Z – [floating point; default: none]. *Z*-coordinate (in meters) of a Cartesian triplet that specifies the location, with respect to a standard, geocentric terrestrial reference frame, where the observation took place. The coordinate **must** be valid at the epoch MJD-AVG or DATE-AVG.

Information on the relative radial velocity between the observer and the selected standard of rest in the direction of the celestial reference coordinate **may** be provided, and if so **shall** be given by the VELOSYS*a* keyword. The frame of rest defined with respect to the emitting source may be represented in FITS*FITS*; for this reference frame it is necessary to define the velocity with respect to some other frame of rest. The keywords SPECSYS*a* and ZSOURCE*a* are used to document the choice of reference frame and the value of the systemic velocity of the source, respectively.

¹⁴ The specification of location for an instrument on a spacecraft in flight requires an ephemeris; keywords that might be required in this circumstance are not defined here.

Table 26: Non-linear spectral algorithm codes.

Code ¹	Regularly sampled in	Expressed as
F2W	Frequency	Wavelength
F2V		Apparent radial velocity
F2A		Air wavelength
W2F	Wavelength	Frequency
W2V		Apparent radial velocity
W2A		Air wavelength
V2F	Apparent radial vel.	Frequency
V2W		Wavelength
V2A		Air wavelength
A2F	Air wavelength	Frequency
A2W		Wavelength
A2V		Apparent radial velocity
LOG	Logarithm	Any four-letter type code
GRI	Detector	Any type code from Table ??
GRA	Detector	Any type code from Table ??
TAB	Not regular	Any four-letter type code

⁽¹⁾ Characters 6 through 8 of the value of the keyword CTYPE*a*.

SSYSSRC*a* – [string; default: none]. Reference frame for the value expressed in the ZSOURCE*a* keyword to document the systemic velocity of the observed source. Value **must** be one of those given in Table ?? *except* for SOURCE ‘SOURCE’.

VELOSYS*a* – [floating point; default: none]. Relative radial velocity between the observer and the selected standard of rest in the direction of the celestial reference coordinate. Units **must** be m s^{-1} . The CUNIT*a* keyword is not used for this purpose since the WCS **version** *a* might not be expressed in velocity units.

ZSOURCE*a* – [floating point; default: none]. Radial velocity with respect to an alternative frame of rest, expressed as a unitless redshift (i.e., velocity as a fraction of the speed of light in vacuum). Used in conjunction with SSYSSRC*a* to document the systemic velocity of the observed source.

VELANGL*a* – [floating point; default: +90.+90.]. In the case of relativistic velocities (e.g., a beamed astrophysical jet) the transverse velocity component is important. This keyword **may** be used to express the orientation of the space velocity vector with respect to the plane of the sky. See Appendix A of reference ? for further details.

Table 27: Spectral reference systems.

Value	Definition	Value	Symbol	Polarization
'TOPOCENT'	Topocentric	1	I 'I'	Standard Stokes unpolarized
'GEOCENTR'	Geocentric	2	Q 'Q'	Standard Stokes linear
'BARYCENT'	Barycentric	3	U 'U'	Standard Stokes linear
'HELIOCENT'	Heliocentric	4	V 'V'	Standard Stokes circular
'LSRK'	Local standard of rest (kinematic)	-1	RR 'RR'	Right-right circular
'LSRD'	Local standard of rest (dynamic)	-2	LL 'LL'	Left-left circular
'GALACTOC'	Galactocentric	-3	RL 'RL'	Right-left cross-circular
'LOCALGRP'	Local Group	-4	LR 'LR'	Left-right cross-circular
'CMBDIPOL'	Cosmic microwave background	5	XX 'XX'	X X parallel linear
'SOURCE'	Source rest frame	-6	YY 'YY'	Y Y parallel linear
		-7	XY 'XY'	XY XY cross linear
		-8	YX 'YX'	YX YX cross linear

Notes. These are the allowed values of the `SPECSYSa`, `SSYSOBSa`, and `SSYSSRCa` keywords.

Table 28: Example `keywords` `keyword records` for a 100 element 100-element array of complex values.

Keyword records		
SIMPLE	=	T
BITPIX	=	-32
NAXIS	=	2
NAXIS1	=	2
NAXIS2	=	100
CTYPE1	=	'COMPLEX'
CRVAL1	=	0.
CRPIX1	=	0.
CDEL1	=	1.
END		

8.5. Conventional coordinate Conventional-coordinate types

The first `FITS` paper (?) listed a number of 'suggested values' for the `CTYPEi` keyword. Two of these have the attribute the associated world coordinates can assume only integer values and that the meaning of these integers is only defined by convention. The first 'conventional' coordinate is `CTYPE1a = 'COMPLEX'` 'COMPLEX' to specify that complex values (i.e., pairs of real and imaginary components) are stored in the data array (along with an optional weight factor). Thus, the complex axis of the data array will contain two values (or three if the weight is specified). By convention, the real component has a coordinate value of 1, the imaginary component has a coordinate value of 2, and the weight, if any, has a coordinate value of 3. Table ?? illustrates the required keywords for an array of 100 complex values (without weights).

The second conventional coordinate is `CTYPE1a = 'STOKES'` 'STOKES' to specify the polarization of the data. Conventional values, their symbols, and polarizations are given in Table ??.

9. Representations of time coordinates

Time as a dimension in astronomical data presents challenges for its representation in `FITS` files. This section formulates the representation of the time axis, or possibly multiple time axes, into the `World Coordinate System` `world-coordinate system` (WCS) described in Sect. ?. Much of the basic structure is employed, while extensions are developed to cope with the differences between time and spatial dimensions; notable amongst

Table 29: Conventional Stokes values.

Value	Symbol	Polarization
1	I 'I'	Standard Stokes unpolarized
2	Q 'Q'	Standard Stokes linear
3	U 'U'	Standard Stokes linear
4	V 'V'	Standard Stokes circular
-1	RR 'RR'	Right-right circular
-2	LL 'LL'	Left-left circular
-3	RL 'RL'	Right-left cross-circular
-4	LR 'LR'	Left-right cross-circular
5	XX 'XX'	X X parallel linear
-6	YY 'YY'	Y Y parallel linear
-7	XY 'XY'	XY XY cross linear
-8	YX 'YX'	YX YX cross linear

these differences is the huge dynamic range, covering the highest resolution timing relative to the age of the `Universe`.

The precision with which any time stamp conforms to any conventional time scale is highly dependent on the characteristics of the acquiring system. The definitions of many conventional time scales vary over their history along with the precision that can be attributed to any time stamp. The meaning of any time stamp may be ambiguous if a time scale is used for dates prior to its definition by a recognized authority, or for dates after that definition is abandoned. However, common sense should prevail: the precision in the description of the time coordinate `should` be appropriate to the accuracy of the temporal information in the data.

9.1. Time values

The three most common ways to specify time are: ISO-8601 (?), Julian Date (JD), or Modified Julian Date (MJD = JD - 2,400,000.5; see ?). Julian Dates are counted from Julian proleptic calendar date 1 January 4713 BCE at noon, or Gregorian proleptic calendar date 24 November 4714 BCE, also at noon. For an explanation of the calendars, see ?. Even though it is common to think of certain representations of time as absolute, time values in `FITS` files *shall* all be considered relative: elapsed time since a particular reference point in time. It may help to view the "absolute" values as merely relative to a globally accepted zero point. For a discussion of the precision required to represent time values in floating-point numbers, see ?.

9.1.1. ISO-8601 `datetime` strings

`FITS` `FITS` `datetime` strings conform to a subset of ISO-8601 (which in itself does not imply a particular time scale) for several time-related keywords (?), such as `. Here datetime` `DATE-xxxx`. `Here datetime` will be used as a pseudo data type to indicate its use, although its values `must` be written as a character string in 'A' format. The full specification for the format of the `datetime` string has been:

```
CCYY-MM-DD[Thh:mm:ss[.s...]]
```

All in which all of the time part *may* be omitted (just leaving the date) or the decimal seconds *may* be omitted. Leading zeroes `must not` be omitted and timezone designators are *not allowed*. This definition is extended to allow five-digit years

with a *mandatory* sign, in accordance with ISO-8601. That is, one *shall* use either the *unsigned* four-digit year format, or the *signed* five-digit year format : [shown below](#).

[±C]CCYY-MM-DD[Thh:mm:ss[.s...]]

Note the following: .

- In counting years, ISO-8601 follows the convention of including **year zero** *Year Zero*. Consequently, for negative year numbers there is an offset of one from BCE dates, which do not recognize a **year zero**. **Thus year** *Year Zero*. **Thus Year** 1 corresponds to 1 CE, **year** *Year 0* to 1 BCE, **year** *Year* –1 to 2 BCE, and so on.
- The earliest date that may be represented in the four-digit year format is **0000-01-01T00:00:00** '0000-01-01T00:00:00' (in the year 1 BCE); the latest date is **9999-12-31T23:59:59** '9999-12-31T23:59:59'. This representation of time is tied to the Gregorian calendar. In conformance with the present ISO-8601:2004(E) standard (?) dates prior to 1582 **must** be interpreted according to the proleptic application of the rules of Gregorius XIII. For dates not covered by that range the use of Modified Julian Date (MJD) or Julian Date (JD) numbers or the use of the signed five-digit year format is **recommended** *recommended*.
- In the five-digit year format the earliest and latest dates are **-99999-01-01T00:00:00** '-99999-01-01T00:00:00' (i.e., –100 000 BCE) and **+99999-12-31T23:59:59** '+99999-12-31T23:59:59'.
- The origin of JD can be written as: **-04713-11-24T12:00:00** '-04713-11-24T12:00:00'.
- In **time scale UTC** the **UTC time scale** the integer part of the seconds field runs from 00 to 60 (in order to accommodate leap seconds); in all other time scales the range is 00 to 59.
- The ISO-8601 **datetime** *datetime* data type is **not allowed** in **image axis descriptions** since **is required** **image-axis descriptions** since CRVAL **is required** to be a **floating point** *floating-point* value.
- ISO-8601 **datetime** *datetime* does not imply the use of any particular time scale (see **Section** *Sect.* ??).
- As specified by ?, time zones are explicitly not supported in **FITS** *FITS* and, consequently, appending the letter '**Z**' to a **FITS** '**Z**' to a **FITS** ISO-8601 string is **not allowed**. The rationale for this rule is that its role in the ISO standard is that of a **time zone** *time-zone* indicator, not a **time scale** *time-scale* indicator. As the concept of a time zone is not supported in **FITS** *FITS*, the use of **time zone** *time-zone* indicator is inappropriate.

9.1.2. Julian and Besselian epochs

In a variety of contexts *epochs* are provided with astronomical data. Until 1976 these were commonly based on the Besselian year (see Sect. ??), with standard epochs B1900.0 and B1950.0. After 1976 the transition was made to Julian epochs based on the Julian year of 365.25 days, with the standard epoch J2000.0. They are tied to **time scales** the ET and TDB **time scales**, respectively. Note that the Besselian epochs are scaled by the variable length of the Besselian year (see Sect. ?? and its cautionary note, which also applies to this context). The Julian epochs are easier to calculate, as long as one keeps track of leap days.

9.2. Time coordinate frame

9.2.1. Time scale

The *time scale* defines the temporal reference frame, and is specified in the header in one of a few ways, depending upon the context. When recorded as a global keyword, the time scale *shall* be specified by : [the following keyword](#).

TIMESYS – [string; default: 'UTC' 'UTC']. The value field of this keyword *shall* **contain a character string** **contain a character-string** code for the time scale of the time-related keywords. The **recommended** *recommended* values for this keyword in Table ?? **have well defined** ?? **have well-defined** meanings, but other values *may* be used. If this keyword is absent, 'UTC' **must** *must* be assumed.

In relevant contexts (e.g., time axes in image arrays, table columns, or random groups) TIMESYS *may* be overridden by a time scale recorded in CTYPE*i*, its **binary table** *binary-table* equivalents, or PTYPE*i* (see Table ??).

The keywords TIMESYS, CTYPE*i*, TCTYP*n*, and TCTY*na* or **binary table** *binary-table* equivalent *may* assume the values listed in Table ?. In addition, for backward compatibility, all except TIMESYS and PTYPE*i* *may* also assume the value 'TIME' (case-insensitive), whereupon the time scale *shall* be that recorded in TIMESYS or, in its absence, its default value, 'UTC'. As noted above, local time scales other than those listed in Table ?? *may* be used, but their use *should* be restricted to alternate coordinates in order that the primary coordinates will always refer to a properly recognized time scale.

See ?, Appendix A, for a detailed discussion of the various time scales. In cases where high-precision timing is important one **may** *may* append a specific realization, in parentheses, to the values in the table; e.g., , , 'TT(TAI)', 'TT(BIPM08)', 'UTC(NIST)'. Note that linearity is not preserved across all time scales. Specifically, if the reference position remains unchanged (see **Section** *Sect.* ??), the first ten, with the exception of 'UT1', are linear transformations of each other (excepting leap seconds), as are **and** 'TDB' **and** 'TCB'. On average 'TCB' runs faster than 'TCG' by approximately 1.6×10^{-8} , but the transformation from **or** 'TT' **or** 'TCG' (which are linearly related) is to be achieved through a time ephemeris as provided by ?.

The relations between coordinate time scales and their dynamical equivalents have been defined as:

$$T(\text{TCG}) = T(\text{TT}) + L_G \times 86400 \times (JD(\text{TT}) - JD_0)$$

$$T(\text{TDB}) = T(\text{TCB}) - L_B \times 86400 \times (JD(\text{TCB}) - JD_0) + TDB_0,$$

where:

$$T \text{ is in seconds}$$

$$L_G = 6.969290134 \times 10^{-10}$$

$$L_B = 1.550519768 \times 10^{-8}$$

$$JD_0 = 2443144.5003725$$

$$TDB_0 = -6.55 \times 10^{-5} \text{ s.}$$

Linearity is virtually guaranteed since images and individual table columns do not allow more than one reference position to be associated with them, and since there is no overlap between reference positions that are meaningful for the first nine time scales on the one hand, and for the barycentric ones on the other. All use of the **time scale** **GMT in FITS** **GMT time scale in FITS** files *shall* be taken to have its zero point at midnight, conformant with UT, including dates prior to 1925. For high-precision timing prior to 1972, see ?, Appendix A.

Table 30: Recognized Time Scale Values

Value	Meaning
'TAI'	(International Atomic Time): atomic time atomic-time standard maintained on the rotating geoid
'TT'	(Terrestrial Time; IAU standard): defined on the rotating geoid, usually derived as TAI + 32.184 s
'TDT'	(Terrestrial Dynamical Time): synonym for TT (deprecated)
'ET'	(Ephemeris Time): continuous with TT; should not should not be used for data taken after 1984-01-01
'IAT'	synonym for TAI (deprecated)
'UT1'	(Universal Time): Earth rotation time
'UTC'	(Universal Time, Coordinated; default): runs synchronously with TAI, except for the occasional insertion of leap seconds intended to keep UTC within 0.9 s of UT1; as of 2015 -07-01 2015-07-01 UTC = TAI - 36 s
'GMT'	(Greenwich Mean Time): continuous with UTC; its use is deprecated for dates after 1972-01-01
UTC ¹ UTC ¹	(Universal Time, with qualifier): for high-precision use of radio signal radio-signal distributions between 1955 and 1972; see ?, Appendix A
'GPS'	(Global Positioning System): runs (approximately) synchronously with TAI; GPS \approx TAI - 19 s
'TCG'	(Geocentric Coordinate Time): TT reduced to the geocenter, corrected for the relativistic effects of the Earth's rotation and gravitational potential; TCG runs faster than TT at a constant rate
'TCB'	(Barycentric Coordinate Time): derived from TCG by a 4-dimensional four-dimensional transformation, taking into account the relativistic effects of the gravitational potential at the barycenter (relative to that on the rotating geoid) as well as velocity time dilation time-dilation variations due to the eccentricity of the Earth's orbit, thus ensuring consistency with fundamental physical constants; ? provide a time ephemeris
'TDB'	(Barycentric Dynamical Time): runs slower than TCB at a constant rate so as to remain approximately in step with TT; runs therefore quasi-synchronously with TT, except for the relativistic effects introduced by variations in the Earth's velocity relative to the barycenter. When referring to celestial observations, a pathlength correction to the barycenter may be needed, which requires the Time Reference Direction used in calculating the pathlength correction.
'LOCAL'	for simulation data and for free-running clocks.

¹Specific realization codes *may* be appended to these values, in parentheses; see the text. For a more-detailed discussion of time scales, see ?, Appendix A.

Some time scales in use are not listed in Table ?? because they are intrinsically unreliable or ill-defined. When used, they *should* be tied to one of the existing scales with appropriate specification of the uncertainties; the same is true for free-running clocks. However, a local time scale such as MET (Mission Elapsed Time) or OET (Observation Elapsed Time) *may* be defined for practical reasons. In those cases the time reference value (see Section ??) **shall not** Sect. ?? *shall not* be applied to the values, and it is strongly **recommended** that such timescales **recommended** that such time scales be provided as alternate time scales, with a defined conversion to a recognized time scale.

It is useful to note that while UT1 is, in essence, an angle (of the Earth's rotation – *i.e.*, a *clock*), the others are SI-second counters (*chronometers*); UTC, by employing leap seconds, serves as a bridge between the two types of time scales.

9.2.2. Time reference value

The time reference value is **not required** *not required* to be present in an HDU. However, if the time reference point is specified explicitly it **must** *must* be expressed in one of ISO-8601, JD, or MJD. These reference values **must only** *only* be applied to time values associated with one of the recognized time scales listed in Table ??, and that time scale **must** *must* be specified explicitly or implicitly as explained in Sect. ??.

The reference point in time, to which all times in the HDU are relative, *shall* be specified through one of three keywords : **specified below**.

MJDREF – [floating-point]; default: **0.00 .0**] The value field of this keyword *shall* contain the value of the reference time in MJD.

JDREF – [floating-point; default: none] The value field of this keyword *shall* contain the value of the reference time in JD.

DATEREF – [datetime; default: none] The value field of this keyword *shall* **contain a character string** *contain a character-string* representation of the reference time in ISO-8601 format.

MJDREF and JDREF **may** *may*, for clarity or precision reasons, be split into two keywords holding the integer and fractional parts separately: .

MJDREFI – [integer; default: **00**] The value field of this keyword *shall* contain the integer part of reference time in MJD.

MJDREFF – [floating-point; default: **0.00 .0**] The value field of this keyword *shall* contain the fractional part of reference time in MJD.

JDREFI – [integer; default: none] The value field of this keyword *shall* contain the integer part of reference time in JD.

JDREFF – [floating-point; default: none] The value field of this keyword *shall* contain the fractional part of reference time in JD.

If [M] JDREF and both [M] JDREFI and [M] JDREFF are present, the integer and fractional values **shall** *shall* have precedence over the single value. If the single value is present with one of the two parts, the single value **shall** *shall* have precedence. In the following, MJDREF and JDREF refer to their literal meaning or the combination of their integer and fractional parts. If a header contains more than one of these keywords, JDREF *shall* have precedence over DATEREF and MJDREF *shall* have precedence over both the others. If none of the three keywords is present, there is no problem as long as all times in the HDU are expressed in ISO-8601; otherwise MJDREF = **0.0** *must* **0 .0** *must* be assumed. If TREFPOS = ' (Section ??) 'CUSTOM' (Sect. ??), it is legitimate for none of the **reference time reference-time** keywords to be present, as one may assume the data are from a simulation. Note that the *value* of the reference time has global validity for all time values, but it does not have a particular time scale associated with it.

9.2.3. Time reference position

An observation is an event in space-time. The reference position specifies the spatial location at which the time is valid, either where the observation was made or the point in space for which light-time corrections have been applied. When recorded as a global keyword, the time reference position *shall* be specified by : the following keyword.

TREFPOS – [string; default: 'TOPOCENTER' 'TOPOCENTER']. The value field of this keyword *shall* contain a character string contain a character-string code for the spatial location at which the observation time is valid. The value *should* be one of those given in Table ???. This keyword *shall* apply to time coordinate apply to time-coordinate axes in images as well.

In binary tables, different columns *may* represent completely different Time Coordinate Frames. However, each column can have only one time reference position, thus guaranteeing linearity (see Section Sect. ???).

TRPOS_n – [string; default: 'TOPOCENTER' 'TOPOCENTER'] The value field of this keyword *shall* contain a character string contain a character-string code for the spatial location at which the observation time is valid. This table keyword *shall* override TREFPOS.

The reference position value *may* be a standard location (such as or 'GEOCENTER' or 'TOPOCENTER') or a point in space defined by specific coordinates. In the latter case one should be aware that a (3-D) spatial coordinate three-dimensional spatial-coordinate frame needs to be defined that is likely to be different from the frame(s) that with which the data are associated with. Note that 'TOPOCENTER' is only moderately informative if no observatory location is provided or indicated. The commonly allowed standard values are shown in Table ???. Note that for the gaseous planets the barycenters of their planetary systems, including satellites, are used for obvious reasons. While it is preferable to spell the location names out in full, in order to be consistent with the practice of ? the values are allowed to be truncated to eight characters. Furthermore, in order to allow for alternative spellings, only the first three characters of all these values *shall* be considered significant. The value of the keyword *shall* be case-sensitive.

The reader is cautioned that time scales and reference positions cannot be combined arbitrarily if one wants a clock that runs linearly at TREFPOS. Table ??? provides a summary of compatible combinations. 'BARYCENTER' *should* only be used in conjunction with time scales and 'TDB' and 'TCB', and *should* be the only reference position used with these time scales. With proper care , , and 'GEOCENTER', 'TOPOCENTER', and 'EMBARYCENTER' are appropriate for the first ten time scales in Table ???. However, relativistic effects introduce a (generally linear) scaling in certain combinations; highly eccentric spacecraft orbits are the exceptions. Problems will arise when using a reference position on another solar system Solar System body (including 'HELIOCENTER'). Therefore it is recommended, it is recommended to synchronize the local clock with one of the time scales defined on the Earth's surface, , , or 'TT', 'TAI', 'GPS', or 'UTC' (in the last case: beware of leap seconds). This is common practice for spacecraft clocks. Locally, such a clock will not appear to run at a constant rate, because of variations in the

Table 31: Standard Time Reference Position Values

Value ¹	Meaning
'TOPOCENTER'	Topocenter: the location from where the observation was made (default)
'GEOCENTER'	Geocenter
'BARYCENTER'	Barycenter of the Solar System
'RELOCATABLE'	Relocatable: to be used for simulation data only
'CUSTOM'	A position specified by coordinates that is not the observatory location
Less-common, but allowed standard values	
'HELIOCENTER'	Heliocenter
'GALACTIC'	Galactic center
'EMBARYCENTER'	Earth-Moon barycenter
'MERCURY'	Center of Mercury
'VENUS'	Center of Venus
'MARS'	Center of Mars
'JUPITER'	Barycenter of the Jupiter system
'SATURN'	Barycenter of the Saturn system
'URANUS'	Barycenter of the Uranus system
'NEPTUNE'	Barycenter of the Neptune system

Notes. ⁽¹⁾Recognized values for TREFPOS, TRPOS_n; only the first three characters of the values are significant and Solar System locations are as specified in the ephemerides.

Table 32: Compatibility of Time Scales and Reference Positions

Reference Position	Time scale ¹				
	TT, TDT TAI, IAT GPS UTC, GMT	TCG	TDB	TCB	LOCAL
'TOPOCENTER'	t	ls			
'GEOCENTER'	ls	c			
'BARYCENTER'			ls	c	
'RELOCATABLE'					c
Other ²	re	re			

Notes. ⁽¹⁾Legend (combination is *not recommended* if there is no entry); **c**: correct match; reference position coincides with the spatial origin of the space-time coordinates; **t**: correct match on Earth's surface, otherwise usually linear scaling; **ls**: linear relativistic scaling; **re**: non-linear relativistic scaling. ⁽²⁾All other locations in the Solar System.

gravitational potential and in motions with respect to Earth, but the effects can be calculated and are probably small compared with errors introduced by the alternative: establishing a local time standard.

In order to provide a complete description, 'TOPOCENTER' requires the observatory's coordinates to be specified. There are three options: (a)(a) the ITRS Cartesian coordinates defined in Sect. ??? (OBSGEO-X, OBSGEO-Y, OBSGEO-Z), which are *strongly preferred*; (b)(b) a geodetic latitude/longitude/elevation triplet (defined below); or (c)(c) a reference to an orbit ephemeris orbit-ephemeris file. A set of geodetic coordinates is recognized : by the following keywords.

OBSGEO-B – [floating-point] The value field of this keyword *shall* contain the latitude of the observation in deg, with North positive.

OBSGEO-L – [floating-point] The value field of this keyword *shall* contain the longitude of the observation in deg, with East positive.

OBSGEO-H – [floating-point] The value field of this keyword *shall* contain the altitude of the observation in meters.

An **orbital ephemeris** `orbital-ephemeris` file can instead be specified: .

OBSORBIT – [string] The value field of this keyword *shall* contain the character-string URI, URL, or the name of an **orbit ephemeris** `orbit-ephemeris` file.

Beware that only one set of coordinates is allowed in a given HDU. Cartesian ITRS coordinates are the preferred coordinate system; however, when using these in an environment requiring nanosecond accuracy, one should take care to distinguish between meters consistent with TCG or with TT. If one uses geodetic coordinates, the geodetic altitude OBSGEO-H is measured with respect to the IAU 1976 ellipsoid, which is defined as having a semi-major axis of 6 378 140 m and an inverse flattening of 298.2577.

A non-standard location indicated by **must** 'CUSTOM' *must* be specified in a manner similar to the specification of the observatory location (indicated by 'TOPOCENTER'). One should be careful with the use of the 'CUSTOM' value and not confuse it with 'TOPOCENTER', as use of the latter imparts additional information on the provenance of the data.

ITRS coordinates (X,Y,Z) can be derived from geodetic coordinates (L,B,HL,B,H) through:

$$X = (N(B) + H) \cos(L) \cos(B)$$

$$Y = (N(B) + H) \sin(L) \cos(B)$$

$$Z = (N(B)(1 - e^2) + H) \sin(B)$$

where:

$$N(B) = \frac{a}{\sqrt{1 - e^2 \sin^2(B)}}$$

$$e^2 = 2f - f^2$$

a is the semi-major axis, and f is the inverse of the inverse flattening. Nanosecond precision in timing requires that OBSGEO-[BLH] be expressed in a geodetic reference frame defined after 1984 in order to be sufficiently accurate.

9.2.4. Time reference direction

If any pathlength corrections have been applied to the time stamps (i.e., if the reference position is not 'TOPOCENTER' for observational data), the reference direction that is used in calculating the pathlength delay *should* be provided in order to maintain a proper analysis trail of the data. However, this is useful only if there is also information available on the location from where the observation was made (the observatory location). The direction will usually be provided in a **spatial coordinate** `spatial-coordinate` frame that is already being used for the spatial metadata, although it is conceivable that multiple spatial frames are involved, e.g., spherical ICRS coordinates for celestial positions, and Cartesian FK5 for spacecraft ephemeris. The time reference

direction does not by itself provide sufficient information to perform a fully correct transformation; however, within the context of a specific analysis environment it should suffice.

The uncertainty in the reference direction affects the errors in the time stamps. A typical example is provided by barycentric corrections where the time error is related to the position error:

$$t_{\text{error}}(\text{ms}) \leq 2.4 \text{ pos}_{\text{error}}(\text{arcsec}).$$

The reference direction is indicated through a reference to specific keywords. These keywords *may* hold the reference direction explicitly or (for data in **BINTABLES** `BINTABLE` extensions) indicate columns holding the coordinates. In event lists where the individual photons are tagged with a spatial position, those coordinates *may* have been used for the reference direction and the reference will point to the columns containing these coordinate values. The time reference direction *shall* be specified by the **keyword: following keyword**.

TREFDIR – [string] The value field of this keyword *shall* contain a character string composed of: the name of the keyword containing the longitudinal coordinate, followed by a comma, followed by the name of the keyword containing the latitudinal coordinate. This reference direction *shall apply to time coordinate* `apply to time-coordinate` axes in images as well.

In binary tables, different columns *may* represent completely different Time Coordinate Frames. However, also in that situation the condition holds that each column can have only one Time Reference Direction. Hence, the following keyword **may** *may* override TREFDIR: .

TRDIRn – [string] The value field of this keyword *shall* contain a character string consisting of the name of the keyword or column containing the longitudinal coordinate, followed by a comma, followed by the name of the keyword or column containing the latitudinal coordinate. This reference direction *shall apply to time coordinate* `apply to time-coordinate` axes in images as well.

9.2.5. Solar System Ephemeris

If applicable, the Solar System ephemeris used for calculating pathlength delays *should* be identified. This is particularly pertinent when the time scale is **or** 'TCB' **or** 'TDB'. The ephemerides that are currently most often used are those from ??.

The Solar System ephemeris used for the data (if required) *shall* be indicated by the following keyword: .

PLEPHEM – [string; default: 'DE405'] The value field of this keyword *shall* contain a character string that *should* represent a recognized designation for the Solar System ephemeris. Recognized designations for JPL Solar System ephemerides that are often used are listed in Table ??.

Future ephemerides in this series *shall* be accepted and recognized as they are released. Additional ephemerides designations **may** *may* be recognized by the IAUFWG upon request.

9.3. Time unit

When recorded as a global keyword, the unit used to express time *shall* be specified by: **the following keyword**.

Table 33: Valid solar system Solar System ephemerides

Value	Reference
'DE200'	?; considered obsolete, but still in use
'DE405'	?; default
'DE421'	?
'DE430'	?
'DE431'	?
'DE432'	?

TIMEUNIT – [string; default: 's' 's'] The value field of this keyword *shall* contain a character string that specifies the time unit; the value *should* be one of those given in Table ???. This time unit *shall* apply to all time instances and durations that do not have an implied time unit (such as is the case for JD, MJD, ISO-8601, J and B epochs). If this keyword is absent, 's' *shall* be assumed.

In an appropriate context, e.g., when an image has a time axis, TIMEUNIT *may* be overridden by the CUNIT*a* keywords and their binary table binary-table equivalents (see Table ??).

The specification of the time unit allows the values defined in ?, shown in Table ??, with the addition of the century. See also Sect. ?? for generalities about units.

Table 34: Recommended time units

Value	Definition
's'	second (default)
'd'	day (= 86,400 s)
'a'	(Julian) year (= 365.25 d)
'cy'	(Julian) century (= 100 a)

The following values are also acceptable.

'min'	minute (= 60 s)
'h'	day (= 86,400 s)
'yr'	(Julian) year (= 'a' = 365.25 d)
'ta'	tropical year
'Ba'	Besselian year

The use of **and** 'ta' **and** 'Ba' is not encouraged, but there are data and applications that require the use of tropical years or Besselian epochs (see Section Sect. ??). The length of the tropical year, 'ta', in days is:

$$1 \text{ ta} = 365.24219040211236 - 0.00000615251349 T - 0.0921 \times 10^{-10} T^2 + 2.6525 \times 10^{-10} T^3 \text{ (d)}$$

where T is in Julian centuries since J2000, using time scale TDB. The length of the Besselian year in days is:

$$1 \text{ Ba} = 365.2421987817 - 0.00000785423 T \text{ (d)}$$

where T is in Julian centuries since J1900, using time scale ET, although for these purposes the difference with TDB is negligible.

Readers are cautioned that the subject of tropical and Besselian years presents a particular quandary for the specification of standards. The expressions presented here are the most accurate available, but are applicable for use when creating data files (which is strongly discouraged), rather than for interpreting

existing data that are based upon these units. **But However**, there is no guarantee that the authors of the data applied these particular definitions. Users are therefore advised to pay close attention and attempt to ascertain what the authors of the data really used.

9.4. Time offset, binning, and errors

9.4.1. Time offset

A uniform clock correction **may** *may* be applied in bulk with the following single keyword.

TIMEOFFS – [floating-point; default: 0.00.0] The value field of this keyword *shall* contain the value of the offset in time that *shall* be added to the reference time, given by one of: MJDREF, JDREF, or DATEREF.

The time offset may serve to set a zero-point offset to a relative time series, allowing zero-relative times, or just higher precision, in the time stamps. Its default value is zero. The value of this keyword affects the values of TSTART, and TSTOP, as well as any time pixel values in a binary table. However, this construct *may* only be used in tables and **must not** *must not* be used in images.

9.4.2. Time resolution and binning

The resolution of the time stamps (the width of the time sampling function) *shall* be specified by : **the following keyword**.

TIMEDEL – [floating-point] The value field of this keyword *shall* contain the value of the time resolution in the units of TIMEUNIT. This construct, when present, **shall only** *shall only* be used in tables and **must not** *must not* be used in images.

In tables this **may**, for instance, be the size of the bins for **time series time-series** data or the bit precision of the **time stamp time-stamp** values.

When data are binned in time bins (or, as a special case, events are tagged with a time stamp of finite precision) it is important to know to the position within the bin (or pixel) to which the time stamp refers. Coordinate values normally correspond to the center of all pixels (see Sect. ??); yet clock readings are effectively truncations, not rounded values, and therefore correspond to the lower bound of the pixel.

TIMEPIXR – [floating-point; default: 0.50.5] The value field of this keyword *shall* contain the value of the position within the pixel, from 0.0 to 1.0, to which the time-stamp refers. This construct, when present, **shall only** *shall only* be used in tables and **must not** *must not* be used in images.

A value of 0.0 0.0 **may** be more common in certain contexts, e.g. when truncated clock readings are recorded, as is the case for almost all event lists.

9.4.3. Time errors

The absolute time error is the equivalent of a systematic error, *shall* be given by the following keyword: .

TIMSYER – [floating-point; default: 0.0.] The value field of this keyword *shall* contain the value of the absolute time error, in units of TIMESYS.

This keyword *may* be overridden, in appropriate context (e.g., time axes in image arrays or table columns; by the CSYER_{ia} keywords and their **binary table** **binary-table** equivalents (see Table ??).

The relative time error specifies accuracy of the time stamps relative to each other. This error will usually be much smaller than the absolute time error. This error is equivalent to a random error, and *shall* be given by the following keyword: .

TIMRDER – [floating-point; default: 0.0.] The value field of this keyword *shall* contain the value of the relative time error, i.e. the random error between time stamps, in units of TIMESYS.

This keyword *may* be overridden, in appropriate context (e.g., time axes in image arrays or table columns; by the CRDER_{ia} keywords and their **binary table** **binary-table** equivalents (see Table ??).

9.5. Global time keywords

The time keywords in Table ?? are likely to occur in headers even when there are no time axes in the data. Except for DATE, they provide the top-level temporal bounds of the data in the HDU. As noted before, they may also be implemented as table columns. Keywords not previously described are defined below; all are included in the summary Table ??.

Table 35: Keywords for global time values

Keyword	Notes
DATE	Defined in Sect. ??.
DATE-OBS	Defined in Sect. ?. Keyword value was not restricted to mean the start time of an observation, and has historically also been used to indicate some form of mean observing date and time. To avoid ambiguity use DATE-BEG instead.
DATE-BEG	Defined in this section.
DATE-AVG	Defined in Sect. ?. The method by which average times should be calculated is not defined by this Standard.
DATE-END	Defined in this section.
MJD-OBS	Defined in Sect. ??.
MJD-BEG	Defined in this section.
MJD-AVG	Defined in Sect. ?. The method by which average times should be calculated is not defined by this Standard.
MJD-END	Defined in this section.
TSTART	Defined in this section.
TSTOP	Defined in this section.

DATE-BEG – [datetime] The value field of this keyword *shall* contain a character string in ISO-8601 format that specifies the start time of data acquisition in the time system specified by the TIMESYS keyword.

DATE-END – [datetime] The value field of this keyword *shall* contain a character string in ISO-8601 format that specifies the stop time of data acquisition in the time system specified by the TIMESYS keyword.

MJD-BEG – [floating-point] The value field of this keyword *shall* contain the value of the MJD start time of data acquisition in the time system specified by the TIMESYS keyword.

MJD-END – [floating-point] The value field of this keyword *shall* contain the value of the MJD stop time of data acquisition in the time system specified by the TIMESYS keyword.

TSTART – [floating-point] The value field of this keyword *shall* contain the value of the start time of data acquisition in units of TIMEUNIT, relative to MJDREF, JDREF, or DATEREF and TIMEOFFS, in the time system specified by the TIMESYS keyword.

TSTOP – [floating-point] The value field of this keyword *shall* contain the value of the stop time of data acquisition in units of TIMEUNIT, relative to MJDREF, JDREF, or DATEREF and TIMEOFFS, in the time system specified by the TIMESYS keyword.

The alternate-axis equivalent keywords for BINTABLEsBINTABLE extensions, DOBS_n, MJDOB_n, DAVG_n, and MJDAn, as defined in Table ??, are also allowed. Note that of the above only TSTART and TSTOP are relative to the time reference value. As in the case of the time reference value (see Section Sect. ??), the JD values supersede DATE values, and MJD values supersede both, in cases where conflicting values are present.

It should be noted that, although they do not represent global time values within an HDU, the CRVAL_{ia} and CDEL_{Tia} keywords, and their **binary table** **binary-table** equivalents (see Table ??), also represent (binary) time values. They should be handled with the same care regarding precision when combining them with the time reference value, as any other time value.

Finally, Julian and Besselian epochs (see Sections ?? and Sects. ?? and ??) *may* be expressed by these two keywords – to be used with great caution, as their definitions are more complicated and hence their use more prone to confusion: .

JEPOCH – [floating-point] The value field of this keyword *shall* contain the value of the Julian epoch, with an implied time scale of 'TDB'.

BEPOCH – [floating-point] The value field of this keyword *shall* contain the value of the Besselian epoch, with an implied time scale of 'ET'.

When these epochs are used as time stamps in a table column, their interpretation will be clear from the context. When the keywords appear in the header without obvious context, they **must** be regarded as equivalents of **and** DATE-OBS **and** MJD-OBS, i.e., with no fixed definition as to what part of the dataset they refer to.

9.6. Other time coordinate time-coordinate axes

There are a few coordinate axes that are related to time and that are accommodated in this **standard**Standard: (temporal) *phase*, *timelag*, and *frequency*. Phase results from folding a time series on a given period, and can appear in parallel with *time* as an alternate description of the same axis. Timelag is the coordinate of cross- and auto-correlation spectra. The temporal *frequency* is the Fourier transform equivalent of time and, particularly, the coordinate axis of power spectra; spectra where the dependent variable is the electromagnetic field are excluded here, but see ?.

These coordinate axes *shall* be specified by giving CTYPER and its [binary table binary-table](#) equivalents one of the values: `,` `,` `,` or `'PHASE'`, `'TIMELAG'`, or `'FREQUENCY'`.

Timelag units are the regular time units, and the basic unit for frequency is 'Hz'. Neither of these two coordinates is a linear or scaled transformation of time, and therefore cannot appear in parallel with time as an alternate description. That is, a given vector of values for an observable can be paired with a coordinate vector of time, or timelag, or frequency, but not with more than one of these; the three coordinates are orthogonal.

Phase can appear in parallel with time as an alternate description of the same axis. Phase *shall* be recorded in the following keywords:

CZPHS*ia* – [floating-point] The value field of this keyword *shall* contain the value of the time at the zero point of a phase axis. Its units *may be , , or be* 'deg', 'rad', or 'turn'.

CPER*ia* – [floating-point] The value field of this keyword, if present *shall* contain the value of the period of a phase axis. This keyword can be used only if the period is a constant; if that is not the case, this keyword *should* either be absent or set to zero.

CZPHS*ia* *may* *may* instead appear in [binary table binary-table](#) forms TCZPH*n*, TCZP*na*, iCZPH*n*, and iCZP*na*. CPER*ia* *may* *may* instead appear in [binary table binary-table](#) forms TPER*n*, TCR*na*, iCPER*n*, and iCPR*na*. The [Phase, period](#) [phase, period](#), and zero point *shall* be expressed in the globally valid time reference frame and unit as defined by the global keywords (or their defaults) in the header.

9.7. Durations

There is an extensive collection of header keywords that indicate time durations, such as exposure times, but there are many pitfalls and subtleties that make this seemingly simple concept treacherous. Because of their crucial role and common use, keywords are defined below to record exposure and elapsed time.

XPOSURE – [floating-point] The value field of this keyword *shall* contain the value for the effective exposure duration for the data, corrected for dead time and lost time in the units of TIMEUNIT. If the HDU contains multiple time slices, this value *shall* be the total accumulated exposure time over all slices.

TELAPSE – [floating-point] The value field of this keyword *shall* contain the value for the amount of time elapsed, in the units of TIMEUNIT, between the start and the end of the observation or data stream.

Durations **must not** be expressed in ISO-8601 format, but only as actual durations (i.e., numerical values) in the units of the specified time unit.

Good-Time-Interval (GTI) tables are common for exposures with gaps in them, particularly photon-event files, as they make it possible to distinguish time intervals with “no signal detected” from “no data taken.” GTI tables in [BINTABLE extensions](#) **must** [BINTABLE extensions](#) *must* contain two mandatory columns, **and** START **and** STOP, and *may* **contain one optional column**, **contain one** *optional column*, WEIGHT. The first two define the interval, the third, with a value between 0 and 1, the quality of the interval; i.e., a weight of 0 indicates a *Bad-Time-Interval*.

WEIGHT has a default value of 1. Any time interval not covered in the table *shall shall* be considered to have a weight of zero.

9.8. Recommended best practices

The following guidelines should be helpful in creating data products with a complete and correct time representation.

- The presence of the informational DATE keyword is *strongly recommended* in all HDUs.
- One or more of the informational keywords DATE-xxxx and/or MJD-xxxx *should* be present in all HDUs whenever a meaningful value can be determined. This also applies, e.g., to catalogs derived from data collected over a well-defined time range.
- The global keyword TIMESYS is *strongly recommended*.
- The global keywords MJDREF or JDREF or DATeref are **recommended**.
- The remaining informational and global keywords *should* be present whenever applicable.
- All context-specific keywords *shall* be present as needed and **required** *required* by the context of the data.

9.8.1. Global keywords and overrides

For reference to the keywords that are discussed here, see Table ???. The globally applicable keywords listed in [Section Sect. B](#) of the table serve as default values for the corresponding C* and TC* keywords in that same section, but only when axis and column specifications (including alternate coordinate definitions) use a time scale listed in Table?? ??, or when the corresponding CTYPER or TTYPER keywords are set to the value 'TIME'. Any alternate coordinate specified in a non-recognized time scale assumes the value of the axis pixels or the column cells, optionally modified by applicable scaling and/or reference value keywords; see also [Section Sect. ??](#).

9.8.2. Restrictions on alternate descriptions

An image will have at most one time axis as identified by having the CTYPER value of 'TIME' or one of the values listed in Table ???. Consequently, as long as the axis is identified through CTYPER, there is no need to have **axis number** **axis-number** identification on the global time-related keywords. It is expressly prohibited to specify more than one time reference position on this axis for alternate **time coordinate** **time-coordinate** frames, since this would give rise to complicated model-dependent non-linear relations between these frames. Hence, time scales **and** (or 'TDB' **and** 'TCB' (or 'ET', to its precision) **may** *may* be specified in the same image, but cannot be combined with any of the first nine time scales in Table ???. Those first nine can be expressed as linear transformations of each other, too, provided the reference position remains unchanged. Time scale 'LOCAL' is by itself, intended for simulations, and **should not** *should not* be mixed with any of the others.

9.8.3. Image time axes

[Section Sect. ??](#) requires keywords CRVAL*ia* to be numeric and they cannot be expressed in ISO-8601 format. Therefore it is

required *required* that CRVAL i contain the elapsed time in units of TIMEUNIT or CUNIT i , even if the zero point of time is specified by DATEREf. If the image does not use a matrix for scaling, rotation, and shear (?), CDELT i provides the numeric value for the time interval. If the PC form of scaling, rotation, and shear (?) is used, CDELT i provides the numeric value for the time interval, and PC i _ j , where $i = j =$ the index of the time axis (in the typical case of an image cube with axis Axis 3 being time, $i = j = 3$) would take the exact value 1, the default (?). When the CD i _ j form of mapping is used, CD i _ j provides the numeric value for the time interval. If one of the axes is time and the matrix form is used, then the treatment of the PC i _ ja (or CD i _ ja) matrices involves at least a Minkowsky metric and Lorentz transformations (as contrasted with Euclidean and Galilean).

10. Representations of compressed data

Minimizing data volume is important in many contexts, particularly for publishers of large astronomical data collections. The following sections describe compressed representations of data in FITS images and BINTABLES FITS images and BINTABLE extensions that preserve metadata and allow for full or partial extraction of the original data as necessary. The resulting FITS FITS file structure is independent of the specific data compression data-compression algorithm employed. The implementation details for some compression algorithms that are widely used in astronomy are defined in Sect. ??, but other compression techniques could also be supported. See the FITS FITS convention by ? for details of the compression techniques, but beware that the specifications in this Standard shall supersede those in the registered convention.

Compression of FITS Compression of FITS files can be beneficial for sites that store or distribute large quantities of data; the present section provides a standard framework that addresses such needs. As implementation of compression/decompression codes can be quite complex, not all FITS software for reading and writing software FITS is necessarily expected to support these capabilities. External utilities are available to compress and uncompress FITS decompress FITS files¹⁵.

10.1. Tiled Image Compression image compression

The following describes the process for compressing n -dimensional FITS FITS images and storing the resulting byte stream in a variable-length column in a FITS FITS binary table, and for preserving the image header keywords in the table header. The general principle is to first divide the n -dimensional image into a rectangular grid of subimages or “tiles.” Each tile is then compressed as a block of data, and the resulting compressed byte stream is stored in a row of a variable length variable-length column in a FITS FITS binary table (see Section Sect. ??). By dividing the image into tiles it is possible to extract and uncompress decompress subsections of the image without having to uncompress decompress the whole image. The default tiling pattern treats each row of a 2-dimensional two-dimensional image (or higher dimensional higher-dimensional cube) as a tile, such that each tile contains

NAXIS1 pixels. This default may not be optimal for some applications or compression algorithms, so any other rectangular tiling pattern may may be defined using keywords that are defined below. In the case of relatively small images it may suffice to compress the entire image as a single tile, resulting in an output binary table with containing a single row. In the case of 3-dimensional three-dimensional data cubes, it may be advantageous to treat each plane of the cube as a separate tile if application software typically needs to access the cube on a plane-by-plane basis.

10.1.1. Required Keywords keywords

In addition to the mandatory keywords for BINTABLE BINTABLE extensions (see Sect. ??) the following keywords are reserved for use in the header of a FITS binary table FITS binary-table extension to describe the structure of a valid compressed FITS FITS image. All are mandatory.

ZIMAGE – [logical; value 'T'T] The value field of this keyword shall contain the logical value 'T' T to indicate that the FITS binary table FITS binary-table extension contains a compressed image, and that logically this extension should be interpreted as an image rather than a table.

ZCMPTYPE – [string; default: none] The value field of this keyword shall contain a character string giving the name of the algorithm that was used to compress the image. Only the values given in Table ?? are permitted; the corresponding algorithms are described in Sect. ?. Other algorithms may be added in the future.

ZBITPIX – [integer; default: none] The value field of this keyword shall contain an integer that gives the value of the BITPIX keyword in the uncompressed FITS FITS image.

ZNAXIS – [integer; default: none] The value field of this keyword shall contain an integer that gives the value of the NAXIS keyword (i.e., the number of axes) in the uncompressed FITS FITS image.

ZNAXIS n – [integer; indexed; default: none] The value field of these keywords shall contain a positive integer that gives the value of the corresponding NAXIS n keywords (i.e., the size of axis n Axis n) in the uncompressed FITS FITS image.

The comment fields for the BITPIX, NAXIS, and NAXIS n keywords in the uncompressed image should be copied to the corresponding fields in the ZBITPIX, ZNAXIS, and ZNAXIS n keywords.

10.1.2. Other Reserved Keywords reserved keywords

The compressed image tiles must must be stored in the binary table in the same order that the first pixel in each tile appears in the FITS FITS image; the tile containing the first pixel in the image must must appear in the first row of the table, and the tile containing the last pixel in the image must must appear in the last row of the binary table. The following keywords are reserved for use in describing compressed images stored in BINTABLE BINTABLE extensions; they may be present in the header, and their values depend upon the type of image compression employed.

ZTILE n – [integer; indexed; default: 1 1 for $n > 1$] The value field of these keywords (where n is a positive integer index

¹⁵ e.g. fpack/funpack, see <https://heasarc.gsfc.nasa.gov/fitsio/fpack/>

that ranges from 1 to ZNAXIS) *shall* contain a positive integer representing the number of pixels along axis n of the compressed tiles. Each tile of pixels *must* be compressed separately and stored in a row of a variable-length vector column in the binary table. The size of each image dimension (given by ZNAXIS n) need not be an integer multiple of ZTILE n , and if it is not, then the last tile along that dimension of the image will contain fewer image pixels than the other tiles. If the ZTILE n keywords are not present then the default “row-by-row” tiling will be assumed, i.e., ZTILE1 ZTILE1 = ZNAXIS1 ZNAXIS1, and the value of all the other ZTILE n keywords *must* equal 1.

ZNAME i – [string; indexed; default: none] The value field of these keywords (where i is a positive integer index starting with 1) *shall* supply the names of up to 999 algorithm-specific parameters that are needed to compress or *uncompress decompress* the image. The order of the compression parameters *may* be significant, and *may* be defined as part of the description of the specific decompression algorithm.

ZVAL i – [string; indexed; default: none] The value field of these keywords (where i is a positive integer index starting with 1) *shall* contain the values of up to 999 algorithm-specific parameters with the same index i . The value of ZVAL i *may* have any valid FITS FITS data type.

ZMASKCMP – [string; default: none] The value field of this keyword *shall* contain the name of the image compression algorithm that was used to compress the optional null-pixel data mask. This keyword *may* be omitted if no null-pixel data masks appear in the table. See Sect. ?? for details.

ZQUANTIZ – [string; default: 'NO_DITHER'] The value field of this keyword *shall* contain the name of the algorithm that was used to quantize floating-point image pixels into integer values, which were then passed to the compression algorithm as discussed further in Sect. ?. If this keyword is not present, the default is to assume that no dithering was applied during quantization.

ZDITHER0 – [integer; default: none] The value field of this keyword *shall* contain a positive integer (that may range from 1 to 10000 inclusive) that gives the seed value for the random dithering pattern that was used when quantizing the floating-point pixel values. This keyword *may* be absent if no dithering was applied. See Sect. ?? for further discussion.

The following keywords are reserved to preserve a verbatim copy of the *value and comment fields* for keywords in the original uncompressed FITS FITS image that were used to describe its *structurestructure*. These optional keywords, when present, *shall* be used when reconstructing an identical copy of the original FITS FITS HDU of the uncompressed image. They *should not* appear in the compressed image header unless the corresponding keywords were present in the uncompressed image.

ZSIMPLE – [logical; value 'T'] The value field of this keyword *must* contain the value of the original SIMPLE keyword in the uncompressed image.

ZEXTEND – [string] The value field of this keyword *must* contain the value of the original EXTEND keyword in the compressed image.

ZBLOCKED – [logical] The value field of this keyword *must* contain the value of the original BLOCKED keyword in the uncompressed image.

ZTENSION – [string] The value field of this keyword *must* contain the original XTENSION keyword in the uncompressed image.

ZPCOUNT – [integer] The value field of this keyword *must* contain the original PCOUNT keyword in the uncompressed image.

ZGCOUNT – [integer] The value field of this keyword *must* contain the original GCOUNT keyword in the uncompressed image.

ZCHECKSUM – [string] The value field of this keyword *must* contain the original CHECKSUM keyword (see Sect. ??) in the uncompressed image.

ZDATASUM – [string] The value field of this keyword *must* contain the original DATASUM keyword (see Sect. ??) in the uncompressed image.

The ZSIMPLE, ZEXTEND, and ZBLOCKED keywords *must not* be used unless the original uncompressed image was contained in the primary array of a FITS FITS file. The ZTENSION, ZPCOUNT, and ZGCOUNT keywords *must not* be used unless the original uncompressed image was contained in an IMAGE IMAGE extension.

The FITS FITS header of the compressed image *may* contain other keywords. If a FITS FITS primary array or IMAGE IMAGE extension is compressed using the procedure described here, it is *strongly recommended* that all the keywords (including comment fields) in the header of the original image, except for the mandatory keywords mentioned above, be copied verbatim and in the same order into the header of the *binary table binary-table* extension that contains the compressed image. All these keywords will have the same meaning and interpretation as they did in the original image, even in cases where the keyword is not normally expected to occur in the header of a *binary table binary-table* extension (e.g., the BSCALE and BZERO keywords, or the *World Coordinate System world-coordinate-system* keywords such as CTYPE n , CRPIX n , and CRVAL n).

10.1.3. Table Columnscolumns

Two columns in the FITS FITS binary table are defined below to contain the compressed image tiles; the order of the columns in the table is not significant. One of the table columns describes optional content; but when this column appears it *must* be used as defined in this section. The column names (given by the TTYPE n keyword) are reserved; they are shown here in *upper case upper-case* letters, but case is not significant.

COMPRESSED_DATA COMPRESSED_DATA – [required; variable-length; required] Each row of this column *must* contain the byte stream that is generated as a result of compressing the corresponding image tile. The data type of the column (as given by the TFORM n keyword) *must* be one of '1PB', '1PI', or '1PJ' '1PB', '1PI', or '1PJ' (or the equivalent '1QB', '1QI', or '1QJ' '1QB', '1QI', or '1QJ'), depending on whether the compression algorithm generates an output stream of 8-bit bytes, or integers of 16-, or 32-bits 16, or 32 bits respectively.

When using the quantization method to compress floating-point images that is described in Sect. ??, it sometimes may not be possible to quantize some of the tiles (e.g., if the range of pixels values is too large or if most of the pixels have the same value and hence the calculated RMS noise level in the tile is close to zero). There also may be other rare cases where the nominal compression algorithm cannot be applied to certain tiles. In these cases, an alternate technique *may* be used in which the raw pixel values are losslessly compressed with the **GZIP** **Gzip** algorithm.

GZIP_COMPRESSED_DATAGZIP_COMPRESSED_DATA

[**optional**; variable-length; **optional**] If the raw pixel values in an image tile are losslessly compressed with the **GZIP** **Gzip** algorithm, the resulting byte stream **must** be stored in this column (with a '1PB' or '1QB' '1PB' or '1QB' variable-length **array column array-column** format). The corresponding **COMPRESSED_DATA** **COMPRESSED_DATA** column for these tiles **must** contain a null pointer (i.e., the pair of integers that constitute the descriptor for the column **must** both have the value zero: see Sect. ??).

The compressed data columns described above *may* use either the '1P' or '1Q' variable-length array **FITS** **FITS** column format if the size of the heap in the compressed **FITS** **FITS** file is < 2.1 GB. If the the heap is larger than 2.1 GB, then the '1Q' format (which uses 64-bit pointers) **must** be used.

When using the **optional** **optional** quantization method described in Sect. ?? to compress floating-point images, the following columns are **required** **required**.

ZSCALE – [floating-point; **optional** **optional**] This column *shall* be used to contain linear scale factors that, along with **ZZERO**, transform the floating-point pixel values in each tile to integers via,

$$Formula - ok - gives - latex diff - errors \quad (12)$$

where I_i and F_i are the integer and (original) floating-point values of the image pixels, respectively **and the round, and the round** function rounds the result to the nearest integer value.

ZZERO – [floating-point; **optional**] This column *shall* be used to contain **zero point zero-point** offsets that are used to scale the floating-point pixel values in each tile to integers via Eq. ??.

Do not confuse the **ZSCALE** and **ZZERO** **ZSCALE** and **ZZERO** columns with the **BSCALE** and **BZERO** keywords (defined in Sect. ??) **which that** may be present in integer **FITS** **FITS** images. Any such integer images **should should** normally be compressed without any further scaling, and the **BSCALE** and **BZERO** **BSCALE** and **BZERO** keywords *should* be copied verbatim into the header of the binary table containing the compressed image.

Some images contain undefined pixel values; in uncompressed floating-point images these pixels have an IEEE NaN value. However, these pixel values will be altered when using the quantization method described in Sect. ?? to compress floating-point images. The value of the undefined pixels *may* be preserved in the following way.

ZBLANK **ZBLANK** – [integer; **optional** **optional**] When present, this column *shall* be used to store the integer value that represents undefined pixels in the scaled integer array. The **recommended** **recommended** value for **ZBLANK** is **-2147483648** **recommended** **recommended** value for **ZBLANK** is **-2147483648**, the largest negative 32-bit integer. If the same null value is used in every tile of the image, then **ZBLANK** **ZBLANK** *may* be given in a header keyword instead of a table column; if both a keyword and a table column named **ZBLANK** **ZBLANK** are present, the values in the table column **must** be used. If there are no undefined pixels in the image then **is not required** **ZBLANK** **is not required** to be present either as a table column or a keyword.

If the uncompressed image has an integer data type (**ZBITPIX** > 0) then the value of undefined pixels is given by the **BLANK** keyword (see Sect. ??), which *should* be used instead of **ZBLANK**. **ZBLANK**.

When using some compression techniques that do not exactly preserve integer pixel values, it may be necessary to store the location of the undefined pixels prior to compressing the image. The locations *may* be stored in an image mask, which *must* itself be compressed and stored in a table column with the following definition. See Sect. ?? for more details.

NULL_PIXEL_MASK **NULL_PIXEL_MASK** – [integer array; **optional** **optional**] When present, this column *shall* be used to store, in compressed form, an image mask with the same original dimensions as the uncompressed image, that records the location of the undefined pixels. The process defined in Sect. ?? *shall* be used to construct the compressed pixel mask.

Additional columns *may* be present in the table to supply other parameters that relate to each image tile. However, these parameters **should not** **should not** be recorded in the image HDU when the uncompressed image is restored.

10.2. Quantization of **Floating-Point Data** **floating-point data**

While floating-point format images may be losslessly compressed, noisy images often do not compress very well. Higher compression can only be achieved by removing some of this noise without losing the useful information content. One commonly used technique for reducing the noise is to scale the floating-point values into quantized integers using Eq. ??, and using the **ZSCALE** and **ZZERO** **ZSCALE** and **ZZERO** columns to record the two scaling coefficients that are used for each tile. Note that the absence of these two columns in a tile-compressed floating-point image is an indication that the image was not scaled, and was instead losslessly compressed.

An effective scaling algorithm for preserving a specified amount of noise in each pixel value is described by ? and by ?. With this method, the **ZSCALE** **ZSCALE** value (which is numerically equal to the spacing between adjacent quantization levels) is calculated to be some fraction, Q , of the RMS noise as measured in background regions of the image. ? shows that the number of binary bits of noise that are preserved in each pixel value is given by $\log_2(Q) + 1.792$. **Q results directly related to** **The Q value directly affects** the compressed file size: decreasing Q Q by a factor of **2** **two** will decrease the file size by about **1 bit** **one**

bit per pixel. In order to achieve the greatest amount of compression, one should use the smallest value of Q/Q that still preserves the required amount of photometric and astrometric precision in the image. **Image quality will remain comparable regardless of the noise level.**

A potential problem when applying this scaling method to astronomical images, in particular, is that it can lead to a systematic bias in the measured intensities in faint parts of the image: . As the image is quantized more coarsely, the measured intensity of the background regions of the sky will tend to be biased towards the nearest quantize level. One very effective technique for minimizing this potential bias is to *dither* the quantized pixel values by introducing random noise during the quantization process. So instead of simply scaling every pixel value in the same way using Eq. ??, the quantized levels are randomized by using this slightly modified equation:

$$F_i = (I_i - R_i + 0.5) * ZSCALE/ZSCALE + ZERO/ZERO \quad (13)$$

where R_i is a random number between 0.0 and 1.0, and 0.5 is subtracted so that the mean quantity equals 0. Then restoring the floating-point value, the same R_i is used with the inverse formula:

$$F_i = ((I_i - R_i + 0.5) * ZSCALE/ZSCALE) + ZERO/ZERO \quad (14)$$

This “subtractive dithering” technique has the effect of dithering the **zero-point zero point** of the quantization grid on a **pixel by pixel pixel-by-pixel** basis without adding any actual noise to the image. The net effect of this is that the mean (and median) pixel value in faint regions of the image more closely approximate the value in the original unquantized image than if all the pixels are scaled without dithering.

The key requirement when using this **subtractive dithering subtractive-dithering** technique is that *the exact same random number random-number sequence must must* be used when quantizing the pixel values to integers, and when restoring them to **floating point floating-point** values. While most computer languages supply a function for generating random numbers, these functions are not guaranteed to generate the same sequence of numbers every time. An algorithm for generating a repeatable sequence of **pseudo random pseudo-random** numbers is given in Appendix ??; this algorithm *must* be used when applying a subtractive dither.

10.2.1. Dithering Algorithmsalgorithms

The ZQUANTIZ keyword, if present, **mustmust** have one of the following values to indicate the type of quantization, if any, that was applied to the floating-point image for compression: .

NO_DITHER 'NO_DITHER' – No dithering was performed; the floating-point pixels were simply quantized using Eq. ??. This option *shall* be assumed if the ZQUANTIZ keyword is not present in the header of the compressed floating-point image.

SUBTRACTIVE_DITHER_1 'SUBTRACTIVE_DITHER_1' – The basic subtractive dithering was performed, the algorithm for which is described below. Note that an image quantized using this technique can still be unquantized using the simple linear scaling function given by Eq. ??, at the

cost of introducing slightly more noise in the image than if the full **subtractive dithering subtractive-dithering** algorithm were applied.

SUBTRACTIVE_DITHER_2 'SUBTRACTIVE_DITHER_2'

– This dithering algorithm is identical to that for 'SUBTRACTIVE_DITHER_1', except that any pixels in the floating-point image that are exactly equal to 0.0 are represented by the reserved value -2147483647 in the quantized integer array. When the image is subsequently **uncompressed decompressed** and unscaled, these pixels **must be must be** restored to their original value of 0.0. This dithering option is useful if the zero-valued pixels have special significance to the data analysis software, so that the value of these pixels **must not must not** be dithered.

The process for generating a subtractive dither for a floating-point image is the following: .

1. Generate a sequence of 10000 single-precision floating-point random numbers, RN, with a value between 0.0 and 1.0. Since it could be computationally expensive to generate a unique random number for every pixel of large images, simply cycle through this look-up table of random numbers.
2. Choose an integer in the range 1 to 10000 to serve as an initial seed value for creating a unique sequence of random numbers from the array that was calculated in the previous step. The purpose of this is to reduce the chances of applying the same dithering pattern to two images that are subsequently subtracted from each other (or co-added), because the benefits of randomized dithering are lost if all the pixels are dithered in phase with each other. The exact method for computing this seed integer is not important as long as the value is chosen more or less randomly.
3. Write the integer seed value that was selected in the previous step as the value of the **ZDITHER0ZDITHER0** keyword in the header of the compressed image. This value is required to recompute the same dithering pattern when **uncompressing decompressing** the image.
4. Before quantizing each tile of the **floating point floating-point** image, calculate an initial value for two offset parameters, I_0 and I_1 , with the following formulae:

$$I_0 = \text{modmod}(N_{\text{tile}} - 1 + \text{ZDITHER0ZDITHER0}, 10000) \quad (15)$$

$$I_1 = \text{INT}(\text{RN}(I_0) * 500) \quad (16)$$

where N_{tile} N_{tile} is the row number in the binary table that is used to store the compressed bytes for that tile, **ZDITHER0ZDITHER0** is that value of that keyword, and $\text{RN}(I_0)$ is the value of the I_0^{th} I_0^{th} random number in the sequence that was computed in the first step. Note that I_0 has a value in the range 0 to 9999 and I_1 has a value in the range 0 to 499. This method for computing I_0 and I_1 was chosen so that a different sequence of random numbers is used to compress successive tiles in the image, and so that the sequence of I_1 values has a length of order **100 million 100-million** elements before repeating.

5. Now quantize each floating-point pixel in the tile using Eq. ?? and using random number $\text{RN}(I_1)$ for the first pixel. Increment the value of I_1 for each subsequent pixel in the tile. If I_1 reaches the upper limit of 500, then increment the value of I_0 and recompute I_1 from Eq. ??. If I_0 also reaches the upper limit of 10000, then reset I_0 to 0.

If the floating-point pixel has an IEEE NaN value, then it is not quantized or dithered but instead is set to the reserved integer value specified by the **ZBLANK** keyword. For consistency, the value of I_1 *should* also be incremented in this case even though it is not used.

6. Compress the array of quantized integers using the lossless algorithm that is specified by the **ZCMPTYPE** keyword (use **RICE_1** 'RICE_1' by default).
7. Write the compressed **byte stream** into the **COMPRESSED_DATA** column in the appropriate row of the binary table corresponding to that tile.
8. Write the linear scaling and **zero point** values that were used in Eq. ?? for that tile into the **ZSCALE** and **ZZERO** columns, respectively, in the same row of the binary table.
9. Repeat Steps 4 through 8 for each tile of the image.

10.2.2. Preserving undefined pixels with lossy compression

The undefined pixels in integer images are flagged by a reserved **BLANK** value and will be preserved if a lossless compression algorithm is used. (**ZBLANK** is used for undefined pixels in floating-point images.) If the image is compressed with a lossy algorithm, then some other technique *must* be used to identify the undefined pixels in the image. In this case it is *recommended* that the undefined pixels be recorded with the following procedure: .

1. Create an integer data mask with the same dimensions as the image tile.
2. For each undefined pixel in the image, set the corresponding mask pixels to 1 and all the other pixels to 0.
3. Compress the mask array using a lossless algorithm such as **PLIO** or **GZIP**, and record the name of that algorithm with the keyword **ZMASKCMP**.
4. Store the compressed byte stream in a **variable-length array column called 'NULL_PIXEL_MASK'** in the table row corresponding to that image tile.

The data mask array pixels *should* have the shortest integer data type that is supported by the compression algorithm (i.e., usually **8-bit** bytes). When *uncompressing* the image tile, the software *must* check if the corresponding compressed data mask exists with a length greater than 0, and if so, *uncompress* the mask and set the corresponding undefined pixels in the image array to the value given by the **BLANK** keyword.

10.3. Tiled Table Compression

The following section describes the process for compressing the content of **BINTABLE** columns. Some additional details of **BINTABLE** compression may be found in ?, but the specifications in this Standard *shall* supersede those in the registered convention. The uncompressed table *may* be subdivided into tiles, each containing a subset of rows, then each column of data within each tile is extracted, compressed, and stored as a variable-length array of bytes in the output compressed table. The header keywords from the uncompressed table, with only a few limited exceptions, *shall* be copied verba-

tim to the header of the compressed table. The compressed table *must* itself be a valid **FITS** binary table (albeit one where the contents cannot be interpreted without *uncompressing* the contents) that contains the same number and order of columns as in the uncompressed table, and that contains one row for each tile of rows in the uncompressed table. Only the compression algorithms specified in Sect. ?? are permitted.

10.3.1. Required Keywords

With only a few exceptions noted below, all the keywords and corresponding comment fields from the uncompressed table *must* be copied verbatim, in order, into the header of the compressed table. Note in particular that the values of the reserved column descriptor keywords **TYPEn**, **TUNITn**, **TSCALEn**, **TZEROn**, **TNULLn**, **TDISPn**, and **TDIMn**, as well as all the column-specific WCS keywords defined in the **FITS standard**, *must* have the same values and data types in both the original and in the compressed table, with the understanding that these keywords apply to the uncompressed data values.

The only keywords that *must not* be copied verbatim from the uncompressed table header to the compressed table header are the mandatory **NAXIS1**, **NAXIS2**, **PCOUNT**, and **TFORMn** keywords, and the optional **CHECKSUM**, **DATASUM** (see Sect. ??), and **THEAP** keywords. These keywords *must* necessarily describe the contents and structure of the compressed table itself. The original values of these keywords in the uncompressed table *must* be stored in a new set of reserved keywords in the compressed table header. Note that there is no need to preserve a copy of the **GCOUNT** keyword because the value is always equal to **1** for **BINTABLES1** for **BINTABLE extensions**. The complete set of keywords that have a reserved meaning within a tile-compressed binary table are given below: .

ZTABLE – [logical; value: 'T'] The value field of this keyword *shall* be 'T' to indicate that the **FITS** binary table **FITS** extension contains a compressed **BINTABLE**, and that logically this extension *should* be interpreted as a tile-compressed binary table.

ZNAXIS1 – [integer; default: none] The value field of this keyword *shall* contain an integer that gives the value of the **NAXIS1** keyword in the original uncompressed **FITS** table header. This represents the width in bytes of each row in the uncompressed table.

ZNAXIS2 – [integer; default: none] The value field of this keyword *shall* contain an integer that gives the value of the **NAXIS2** keyword in the original uncompressed **FITS** table header. This represents the number of rows in the uncompressed table.

ZPCOUNT – [integer; default: none] The value field of this keyword *shall* contain an integer that gives the value of the **PCOUNT** keyword in the original uncompressed **FITS** table header.

ZFORMn – [string; indexed; default: none] The value field of these keywords *shall* contain the character string values of the corresponding **TFORMn** keywords that defines the data type of **Column n** in the original uncompressed **FITS** table.

ZCTYPn – [string; indexed; default: none] The value field of these keywords *shall* contain the character string

character-string value mnemonic name of the algorithm that was used to compress **column n** **Column n** of the table. The only permitted values are given in Sect. ??, and the corresponding algorithms are described in Sect. ??.

ZTILELEN – [integer; default: none] The value field of this keyword *shall* contain an integer representing the number of rows of data from the original binary table that are contained in each tile of the compressed table. The number of rows in the last tile may be **less fewer** than in the previous tiles. Note that if the entire table is compressed as a single tile, then the compressed table will only contains a single row, and the **ZTILELEN** and **ZNAXIS2** keywords will have the same value.

10.3.2. Procedure for **Table Compression** **table compression**

The procedure for compressing a **FITS** **FITS** binary table consists of the following sequence of steps: .

1. Divide table into tiles (*optional*)

In order to limit the amount of data that must be managed at one time, large **FITS** **FITS** tables *may* be divided into tiles, each containing the same number of rows (except for the last tile, which *may* contain fewer rows). Each tile of the table is compressed in order, and each is stored in a single row in the output compressed table. There is no fixed upper limit on the allowed tile size, but for practical purposes it is **recommended** **recommended** that it not exceed 100 MB.

2. Decompose each tile into the component columns

FITS **FITS** binary tables are physically stored in row-by-row sequential order, such that the data values for the first row in each column are followed by the values in the second row, and so on (see Sect. ??). Because adjacent columns in binary tables can contain very non-homogeneous types of data, it can be challenging to efficiently compress the native stream of bytes in the **FITS** **FITS** tables. For this reason, the table is first decomposed into its component columns, and then each column of data is compressed separately. This also allows one to choose the **most efficient** **most-efficient** compression algorithm for each column.

3. Compress each column of data

Each column of data *must* be compressed with one of the lossless compression algorithms described in Sect. ?? . If the table is divided into tiles, then the same compression algorithm *must* be applied to a given column in every tile. In the case of variable-length array columns (where the data are stored in the table heap: see Sect. ??), each individual **variable length vector** **variable-length vector** *must* be compressed separately.

4. Store the compressed bytes

The compressed stream of bytes for each column *must* *must* be written into the corresponding column in the output table. The compressed table *must* *must* have exactly the same number and order of columns as the input table, however, the data type of the columns in the output table will all have a variable-length byte data type, with **TFORMn** = '1QB' **TFORMn** = '1QB' . Each row in the compressed table corresponds to a tile of rows in the uncompressed table.

In the case of variable-length array columns, the array of descriptors that point to each compressed variable-length array, as well as the array of descriptors from the input un-

compressed table, *must* *must* also be compressed and written into the corresponding column in the compressed table. See Sect. ?? for more details.

10.3.3. Compression **Directive Keywords** **directive keywords**

The following compression-directive keywords, if present in the header of the table to be compressed, are reserved to provide guidance to the compression software on how the table should be compressed. The compression software *should* attempt to obey these directives, but if that is not possible the software *may* *may* disregard them and use an appropriate alternative. These keywords are optional, but *must* *must* be used as specified below.

– **FZTILELN** – [integer] The value field of this keyword *shall* contain an integer that specifies the requested number of table rows in each tile **which that** are to be compressed as a group.

– **FZALGOR** – [string] The value field of this keyword *shall* contain a character string giving the mnemonic name of the algorithm that is requested to be used by default to compress every column in the table. The permitted values are given in Sect. ??.

– **FZALGn** – [string; indexed] The value fields of these keywords *shall* contain a character string giving the mnemonic name of the algorithm that is requested to compress **column n** **Column n** of the table. The current allowed values are the same as for the **FZALGOR** **FZALGOR** keyword. The **FZALGn** **FZALGn** keyword takes precedence over **FZALGOR** **FZALGOR** in determining which algorithm to use for a particular column if both keywords are present.

10.3.4. Other **Reserved Keywords** **reserved keywords**

The following keywords are reserved to store a verbatim copy of the value and comment fields for specific keywords in the original uncompressed **BINTABLE** **BINTABLE**. These keywords, if present, *should* be used to reconstruct an identical copy of the uncompressed **BINTABLE**, **and should not** **BINTABLE**, **and should not** appear in the compressed table header unless the corresponding keywords were present in the uncompressed **BINTABLE** **BINTABLE**.

ZTHEAP – [integer; default: none] The value field of this keyword *shall* contain an integer that gives the value of the **THEAP** keyword if present in the original uncompressed **FITS** **FITS** table header.

ZCHECKSUM – [string; default: none] The value field of this keyword *shall* contain a character string that gives the value of the **CHECKSUM** keyword (see Sect. ??.) in the original uncompressed **FITS** **FITS** HDU.

ZDATASUM – [string; default: none] The value field of this keyword *shall* contain a character **string** that gives the value of the **DATASUM** keyword (see Sect. ??.) in the original uncompressed **FITS** **FITS** HDU.

10.3.5. Supported **Compression Algorithms** **compression algorithms** for **Table** **tables**

The permitted algorithms for compressing **BINTABLE** **columns** are , , and (plus **BINTABLE** **columns** are 'RICE_1', 'GZIP_1',

and 'GZIP_2' (plus 'NOCOMPRESS'), which are lossless and are described in Sect. ???. Lossy compression could be allowed in the future once a process is defined to preserve the details of the compression.

10.3.6. Compressing Variable-Length Array Columns variable-length array columns

Compression of BINTABLE BINTABLE tiles that contain variable-length array (VLA) columns requires special consideration because the array values in these columns are not stored directly in the table, but are instead stored in a data heap, which follows the main table (see Sect. ??). The VLA column in the original, uncompressed table only contains descriptors, which are composed of comprise two integers that give the size and location of the arrays in the heap. When uncompressing decompressing, these descriptor values will be needed to write the uncompressed decompressed VLAs back into the same location in the heap as in the original uncompressed table. Thus, the following process *must* be followed, in order, when compressing a VLA column within a tile: . Refer to ? for additional details.

1. For each VLA in the column:
 - Read read the array from the input table, and compress it using the algorithm specified by ZCTYP for this VLA column. ;
 - Write the resulting bytestream write the resulting byte stream to the heap of the compressed table. ; and
 - Store store (or append) the descriptors to the compressed bytestream byte stream (which *must* be 64-bit Q-type) in a temporary array.
2. Append the VLA descriptors from the uncompressed table (which *may* be either Q-type or P-type) to the temporary array of VLA descriptors for the compressed table.
3. Compress the combined array of descriptors using 'GZIP_1', and write that byte stream into the corresponding VLA column in the output table, so that the compressed array is appended to the heap.

When uncompressing decompressing a VLA column, two stages of uncompression decompression *must* be performed in order: .

1. Uncompress Decompress the combined array of descriptors using the Gzip algorithm.
2. For each descriptor to a compressed array:
 - Read read the compressed VLA from the compressed table and uncompress , and decompress it using the algorithm specified by ZCTYP for this VLA column. ; and
 - Write write it to the correct location in the uncompressed decompressed table.

Table 36: Valid mnemonic values for the ZCMPTYPE and ZCTYPn keywords

Value	Sect.	Compression Type
'RICE_1'	??	Rice algorithm for integer data
'GZIP_1'	??	Combination of the LZ77 algorithm and Huffman coding, used in Gnu GZIP GNU Gzip
'GZIP_2'	??	Like 'GZIP_1', but with reshuffled pixel byte values
'PLIO_1'	??	IRAF PLIO algorithm for integer data
'HCOMPRESS_1'	??	H-compress algorithm for 2-D two-dimensional images
'NOCOMPRESS'		The HDU remains uncompressed

10.4. Compression Algorithms algorithms

The name of the permitted algorithms for compressing FITS FITS HDUs, as recorded in the ZCMPTYPE keyword, are listed in Table ??; if other types are later supported, they *must* be registered with the IAUFWG to reserve the keyword values. Keywords for the parameters of supported compression algorithms have also been reserved, and are described with each algorithm in the subsections below. If alternative compression algorithms require keywords beyond those defined below, they *must* also be registered with the IAUFWG to reserve the associated keyword names.

10.4.1. Rice compression

When ZCMPTYPE = 'RICE_1' ZCMPTYPE = 'RICE_1', the Rice algorithm (?) *shall* be used for data (de)compression. When selected, the keywords in Table ?? *should* also appear in the header with one of the values indicated. If these keywords are absent, then their default values *must* be used. The Rice algorithm is lossless, but can only be applied to integer-valued arrays. It offers a significant performance advantage over the other compression techniques (see ?).

Table 37: Keyword parameters for Rice compression

Keyword	Values		
	Permitted	Default	Meaning
ZNAME1	'BLOCKSIZE'	–	Size of block in pixels
ZVAL1	16, 32 16, 32	32 32	No. of pixels in a block
ZNAME2	'BYTEPIX'	–	Size of pixel value in bytes
ZVAL2	1, 2, 4, 8 1, 2, 4, 8	4 4	No. 8-bit of eight-bit bytes per original pixel value

10.4.2. GZIP Gzip compression

When ZCMPTYPE = 'GZIP_1' the gzip ZCMPTYPE = 'GZIP_1', the Gzip algorithm *shall* be used for data (de)compression. There are no algorithm parameters, so the keywords ZNAME_n and ZVAL_n *should not* appear in the header. The gzip Gzip algorithm is used in the free GNU software compression utility of the same name. It was created by J.-L. Gailly and M. Adler, based on the DEFLATE algorithm (?), which is a combination of LZ77 (?) and Huffman coding. The unix gzip Unix gzip program accepts an integer parameter that provides a trade between optimization for speed (1) and compression ratio (9), which does not affect the format of the resultant data stream.

The selection of this parameter is an implementation detail that is not covered by this Standard.

When `ZCMPTYPE = 'GZIP_2'` `ZCMPTYPE = 'GZIP_2'`, the `gzip2` algorithm shall be used for data (de)compression. The `gzip2` algorithm is a variation on `'GZIP_1'`. There are no algorithm parameters, so the keywords `ZNAME n` and `ZVAL n` should not appear in the header. In this case the bytes in the array of data values are shuffled so that they are arranged in order of decreasing significance before being compressed. For example, a 5-element five-element contiguous array of 2-byte two-byte (16-bit) integer values, with an original big-endian byte order of:

$$A_1A_2B_1B_2C_1C_2D_1D_2E_1E_2$$

will have the following byte order after shuffling:


$$A_1B_1C_1D_1E_1A_2B_2C_2D_2E_2,$$

where $A_1, B_1, C_1, D_1,$ and E_1 are the most significant most-significant bytes from each of the integer values. Byte shuffling shall only be performed for integer or floating-point numeric data types; logical, bit, and character types must not be shuffled.

10.4.3. IRAF/PLIO compression

When `ZCMPTYPE = 'PLIO_1'` `ZCMPTYPE = 'PLIO_1'`, the IRAF PLIO algorithm shall be used for data (de)compression. There are no algorithm parameters, so the keywords `ZNAME n` and `ZVAL n` should not appear in the header. The PLIO algorithm was developed to store integer-valued image masks in a compressed form. The compression algorithm used is based on run-length encoding, with the ability to dynamically follow level changes in the image, in principle allowing a 16-bit encoding to be used regardless of the image depth. However, this algorithm has only been implemented in a way that supports image depths of no more than 12 bits; therefore `'PLIO_1'` `PLIO_1` must only be used for integer image types with values between 0 and 2^{24} .

The compressed line lists are stored as variable length variable-length arrays of type short integer (16 bits per list element), regardless of the mask depth. A line list consists of a series of simple instructions, which are executed in sequence to reconstruct a line of the mask. Each 16 bit 16-bit instruction consists of the sign bit (not used), a three bit three-bit opcode, and twelve bits of data, i.e. : as depicted below.



The significance of the data depends upon the instruction. In order to reconstruct a mask line, the application executing these instructions is required to keep track of two values, the current high value and the current position in the output line. The detailed operation of each instruction is given in Table ??.

The high value must be set to 1 at the beginning of a line, hence the `IH, DH` and `IS, DS` `'IH, DH'` and `'IS, DS'` instructions are not normally needed for Boolean masks.

Table 38: PLIO Instructions

Instr.	Opcode	Meaning
'ZN'	'00'	Zero the next N N output pixels.
'HN'	'04'	Set the next N N output pixels to the current high value.
'PN'	'05'	Zero the next $N-1$ $N-1$ output pixels, and set pixel N Pixel N to the current high value.
'SH'	'05'	Set the high value (absolute rather than incremental), taking the high 15 bits from the next word in the instruction stream, and the low 12 bits from the current data value.
'IH, DH'	'02, 03'	Increment (<code>'IH'</code> <code>'IH'</code>) or decrement (<code>'DH'</code> <code>'DH'</code>) the current high value by the data value. The current position is not affected.
'IS, DS'	'06, 07'	Increment (<code>'IS'</code> <code>'IS'</code>) or decrement (<code>'DS'</code> <code>'DS'</code>) the current high value by the data value, and step, i.e., output one high value.

10.4.4. H-Compress algorithm

When `ZCMPTYPE = 'HCOMPRESS_1'` `ZCMPTYPE = 'HCOMPRESS_1'`, the H-compress algorithm shall be used for data (de)compression. The algorithm was described by ?, and can be applied only to images with two dimensions. Briefly, the compression method is to apply, in order:

1. a wavelet transform called the H-transform (a Haar transform generalized to two dimensions), followed by
2. a quantization that discards noise in the image while retaining the signal on all scales, followed by and finally
3. a quadtree coding of the quantized coefficients.

The H-transform is a two-dimensional generalization of the Haar transform. The H-transform is calculated for an image of size $2^N \times 2^N$ as follows: .

1. Divide the image up into blocks of 2×2 pixels. Call the four pixel values in a block $a_{00}, a_{10}, a_{01},$ and a_{11} .
2. For each block compute four coefficients:
 $h_0 = (a_{11} + a_{10} + a_{01} + a_{00}) / (\text{SCALE} * \sigma)$
 $h_x = (a_{11} + a_{10} - a_{01} - a_{00}) / (\text{SCALE} * \sigma)$
 $h_y = (a_{11} - a_{10} + a_{01} - a_{00}) / (\text{SCALE} * \sigma)$
 $h_c = (a_{11} - a_{10} - a_{01} + a_{00}) / (\text{SCALE} * \sigma)$
 where `SCALE` is an algorithm parameter defined below, and σ characterizes the RMS noise in the uncompressed image.
3. Construct a $2^{N-1} \times 2^{N-1}$ image from the h_0 values for each 2×2 block. Divide that image up into 2×2 blocks and repeat the above calculation. Repeat this process N times, reducing the image in size by a factor of 2 two at each step, until only one h_0 value remains.

This calculation can be easily inverted to recover the original image from its transform. The transform is exactly reversible using integer arithmetic. Consequently, the program can be used for either lossy or lossless compression, with no special approach needed for the lossless case.

Noise in the original image is still present in the H-transform, however. To compress noisy images, each coefficient can be divided by `SCALE * σ` , where `SCALE ~ 1` is chosen according to

how much loss is acceptable. This reduces the noise in the transform to $0.5/SCALE$, so that large portions of the transform are zero (or nearly zero) and the transform is highly compressible.

There is one user-defined parameter associated with the H-Compress algorithm: a scale factor to the RMS noise in the image that determines the amount of compression that can be achieved. It is not necessary to know what scale factor was used when compressing the image in order to **uncompress decompress** it, but it is still useful to record it. The keywords in Table ?? *should* be recorded in the header for this purpose.

Table 39: Keyword parameters for H-compression

Keyword	Values		Meaning
	Permitted	Default	
ZNAME1	'SCALE'	- '-'	Scale factor
ZVAL1	0.0 0.0 or larger	0.0 0.0	Scaling of the RMS noise; 0.0 yields lossless compression

Scale Factor – The floating-point scale parameter (whose value is stored in Keyword ZVAL1) determines the amount of compression; higher values result in higher compression, but with greater loss of information. $SCALE = 0.0\ 0.0$ is a special case that yields lossless compression, i.e. the decompressed image has exactly the same pixel values as the original image. $SCALE > 0.0$ leads to lossy compression, where $SCALE$ determines how much of the noise is discarded.

Appendix A: Syntax of keyword records

This *Appendix appendix* is not part of the *FITSstandard* *FITS Standard* but is included for convenient reference.

<code>:=</code>	means ‘is defined to be’
<code>X Y</code>	means one of X or Y X or Y (no ordering relation is implied)
<code>[X]</code>	means that X X is <i>optional</i>
<code>X...</code>	means X X is repeated one or more times
<code>‘B’</code>	means the ASCII character B
<code>‘A’–‘Z’</code>	means one of the ASCII characters A through Z in the ASCII collating sequence, as shown in Appendix ??
<code>\0xnn</code>	means the ASCII character associated with the hexadecimal code nn
<code>{...}</code>	expresses a constraint or a comment (it immediately follows the syntax rule)

The following statements define the formal syntax used in *FITSFITS* free-format keyword records, as well as for long-string keywords spanning more than one keyword record).

```
FITS_keyword :=
  single_record_keyword |
  long_string_keyword
```

```
single_record_keyword :=
  FITS_keyword_record
```

```
FITS_keyword_record :=
  FITS_commentary_keyword_record |
  FITS_value_keyword_record
```

```
FITS_commentary_keyword_record :=
  COMMENT_keyword [ascii_text_char...] |
  HISTORY_keyword [ascii_text_char...] |
  BLANKFIELD_keyword [ascii_text_char...] |
  keyword_field anychar_but_equal
    [ascii_text_char...] |
  keyword_field ‘=’ anychar_but_space
    [ascii_text_char...]
```

{Constraint: The total number of characters in a `FITS_commentary_keyword_record` **mustmust** be exactly equal to 80.}

```
FITS_value_keyword_record :=
  keyword_field value_indicator [space...] [value]
    [space...] [comment]
```

{Constraint: The total number of characters in a `FITS_value_keyword_record` **mustmust** be exactly equal to 80.}

{Comment: If the value field is not present, the value of the *FITSFITS* keyword is not defined.}

```
long_string_keyword :=
  initial_kwd_record [continuation_kwd_record...]
  last_continuation_record
```

{Comment: the value of a `long_string_keyword` is reconstructed by concatenating the `partial_string_values` of the `initial_kwd_record` and of any `continuation_kwd_records` in the order they occur, and the `character_string_value` of the

```
last_continuation_record.}
```

```
initial_kwd_record :=
  keyword_field value_indicator [space...]
  [partial_string_value] [space...] [comment]
{Constraint: The total number of characters in an initial_kwd_record must be exactly equal to 80.}
```

```
continuation_kwd_record :=
  CONTINUE_keyword [space...]
  [partial_string_value] [space...] [comment]
{Constraint: The total number of characters in a continuation_kwd_record must be exactly equal to 80.}
```

```
last_continuation_record :=
  CONTINUE_keyword [space...]
  [character_string_value] [space...] [comment]
{Constraint: The total number of characters in a last_continuation_record must be exactly equal to 80.}
```

```
keyword_field :=
  [keyword_char...] [space...]
{Constraint: The total number of characters in the keyword_field mustmust be exactly equal to 8.}
```

```
keyword_char :=
  ‘A’–‘Z’ | ‘0’–‘9’ | ‘_’ | ‘-’
```

```
COMMENT_keyword :=
  ‘C’ ‘O’ ‘M’ ‘M’ ‘E’ ‘N’ ‘T’ space
```

```
HISTORY_keyword :=
  ‘H’ ‘I’ ‘S’ ‘T’ ‘O’ ‘R’ ‘Y’ space
```

```
BLANKFIELD_keyword :=
  space space space space space space space space
```

```
CONTINUE_keyword :=
  ‘C’ ‘O’ ‘N’ ‘T’ ‘I’ ‘N’ ‘U’ ‘E’
```

```
value_indicator :=
  ‘=’ space
```

```
space :=
  ‘ ’
```

```
comment :=
  ‘/’ [ascii_text_char...]
```

```
ascii_text_char :=
  space–‘~’
```

```
anychar_but_equal :=
  space–‘<’ | ‘>’–‘~’
```

```
anychar_but_space :=
  ‘|’–‘~’
```

```
value :=
  character_string_value | logical_value |
  integer_value | floating_value |
```

complex_integer_value | complex_floating_value

character_string_value :=

begin_quote [string_text_char...] end_quote

{Constraint: The begin_quote and end_quote are not part of the **character string** character-string value but only serve as delimiters. Leading spaces are significant; trailing spaces are not.}

partial_string_value :=

begin_quote [string_text_char...] ampersand end_quote

{Constraint: The begin_quote, end_quote, and ampersand are not part of the character-string value but only serve respectively as delimiters or continuation indicator. }

begin_quote :=

quote

end_quote :=

quote

{Constraint: The ending quote **must not** be immediately followed by a second quote.}

quote :=

\0x27

ampersand :=

'&'

string_text_char :=

ascii_text_char

{Constraint: A string_text_char is identical to an ascii_text_char except for the quote char; a quote char is represented by two successive quote chars.}

logical_value :=

'T' | 'F'

integer_value :=

[sign] digit [digit...]

{Comment: Such an integer value is interpreted as a signed decimal number. It **may** contain leading zeros.}

sign :=

'-' | '+'

digit :=

'0'–'9'

floating_value :=

decimal_number [exponent]

decimal_number :=

[sign] [integer_part] ['.' [fraction_part]]

{Constraint: At least one of the integer_part and fraction_part **must** be present.}

integer_part :=

digit | [digit...]

fraction_part :=

digit | [digit...]

exponent :=

exponent_letter [sign] digit [digit...]

exponent_letter :=

'E' | 'D'

complex_integer_value :=

(' [space...] real_integer_part [space...] ';' [space...] imaginary_integer_part [space...] ')

real_integer_part :=

integer_value

imaginary_integer_part :=

integer_value

complex_floating_value :=

(' [space...] real_floating_part [space...] ';' [space...] imaginary_floating_part [space...] ')

real_floating_part :=

floating_value

imaginary_floating_part :=

floating_value

Appendix B: Suggested **time scale** time-scale specification

*The content of this **Appendix appendix** has been superseded by **SectionSect. ??** of the formal Standard, which derives from ?.*

Appendix C: Summary of keywords

This *Appendix appendix* is not part of the *FITSstandardFITS Standard*, but is included for convenient reference.

All of the mandatory and reserved keywords that are defined in the *standardStandard*, except for the reserved WCS keywords that are discussed separately in Sect. ??, are listed in Tables ??, ??, and ??. An *alphabetized alphabetical* list of these keywords and their definitions is available online: http://heasarc.gsfc.nasa.gov/docs/fcg/standard_dict.html.

Table C.1:

Mandatory *FITSFITS* keywords for the structures described in this document.

Primary HDU	Conforming extension	Image extension	ASCII-table extension	Binary-table extension	Compressed images ⁶
SIMPLE SIMPLE	XTENSION XTENSION	XTENSION XTENSION ¹	XTENSION XTENSION ²	XTENSION XTENSION ³	ZIMAGE =T
BITPIX BITPIX	BITPIX BITPIX	BITPIX BITPIX	BITPIX = 8	BITPIX = 8	ZBITPIXZBITPIX
NAXIS NAXIS	NAXIS NAXIS	NAXIS NAXIS	NAXIS = 2	NAXIS = 2	ZNAXISZNAXIS
NAXISn NAXISn ⁴	NAXISn NAXISn ⁴	NAXISn NAXISn ⁴	NAXIS1 NAXIS1	NAXIS1 NAXIS1	ZNAXISn ZNAXISn
END END	PCOUNT PCOUNT	PCOUNT = 0	NAXIS2 NAXIS2	NAXIS2 NAXIS2	ZCMPTYPE ZCMPTYPE
	GCOUNT GCOUNT	GCOUNT = 1	PCOUNT = 0	PCOUNT PCOUNT	
	END END	END END	GCOUNT = 1	GCOUNT = 1	
			TFIELDS TFIELDS	TFIELDS TFIELDS	
			TFORMn TFORMn ⁵	TFORMn TFORMn ⁵	
			TBCOLn TBCOLn ⁵	END END	
			END END		

⁽¹⁾**XTENSION**=_'IMAGE_...' XTENSION=_'IMAGE_...' for the image extension. ⁽²⁾**XTENSION**=_'TABLE_...' for the ASCII table XTENSION=_'TABLE_...' for the ASCII-table extension. ⁽³⁾**XTENSION**=_'BINTABLE' for the binary table XTENSION=_'BINTABLE' for the binary-table extension. ⁽⁴⁾Runs from 1 through the value of **NAXIS**NAXIS. ⁽⁵⁾Runs from 1 through the value of **TFIELDS**TFIELDS. ⁽⁶⁾**required** Required in addition to the mandatory keywords for binary tables.

Table C.2:

Reserved *FITSFITS* keywords for the structures described in this document.

All ¹ HDUs	Array ² HDUs	ASCII-table extension	Binary-table extension	Compressed images
DATE DATE	EXTNAME EXTNAME	BSCALE BSCALE	TSCALn TSCALn	ZTILEn ZTILEn
DATE-OBS DATE-OBS	EXTVER EXTVER	BZERO BZERO	TZEROn TZEROn	ZNAMEi ZNAMEi
ORIGIN ORIGIN	EXTLEVEL EXTLEVEL	BUNIT BUNIT	TNULLn TNULLn	ZVALi ZVALi
AUTHOR AUTHOR	EQUINOX EQUINOX	BLANK BLANK	TTYPEn TTYPEn	ZMASKCMP ZMASKCMP
REFERENCE REFERENC	EPOCH EPOCH ³	DATAMAX DATAMAX	TUNITn TUNITn	ZQUANTIZ ZQUANTIZ
COMMENT COMMENT	BLOCKED BLOCKED ³	DATAMIN DATAMIN	TDISPn TDISPn	ZDITHER0 ZDITHER0
HISTORY HISTORY	EXTEND EXTEND ⁴		TDMAXn TDMAXn	ZSIMPLEZ ZSIMPLE
	TELESCOPE TELESCOP		TDMINn TDMINn	ZEXTEND ZEXTEND
OBJECT OBJECT	INSTRUME INSTRUME		THEAP THEAP	ZBLOCKED ZBLOCKED
OBSERVER OBSERVER			TLMAXn TLMAXn	ZTENSION ZTENSION
CONTINUE CONTINUE			TLMINn TLMINn	ZPCOUNT ZPCOUNT
INHERIT INHERIT ⁵				ZGCOUNT ZGCOUNT
CHECKSUM CHECKSUM				ZCHECKSUM ZCHECKSUM
DATASUM DATASUM				ZDATASUM ZDATASUM

⁽¹⁾These keywords are further categorized in Table C.3. ⁽²⁾Primary HDU, *image* IMAGE extension, user-defined HDUs with same array structure.

⁽³⁾Deprecated. ⁽⁴⁾Only permitted in the primary HDU. ⁽⁵⁾Only permitted in extension HDUs, immediately following the mandatory keywords.

Table C.3:

General reserved **FITS**/**FITS** keywords described in this document.

Production	Bibliographic	Commentary	Observation
DATE DATE	AUTHOR AUTHOR	COMMENT COMMENT	DATE-OBS DATE-OBS
ORIGIN ORIGIN	REFERENC REFERENC	HISTORY HISTORY	TELESCOP TELESCOP
BLOCKED BLOCKED ¹		INSTRUME INSTRUME
			OBSERVER OBSERVER
			OBJECT OBJECT
			EQUINOX EQUINOX
			EPOCH EPOCH ¹

⁽¹⁾Deprecated.

DRAFT

Table D.1: ASCII character set.

ASCII control			ASCII text								
dec	hex	char	dec	hex	char	dec	hex	char	dec	hex	char
0	00	NUL	32	20	SP	64	40	@	96	60	`
1	01	SOH	33	21	!	65	41	A	97	61	a
2	02	STX	34	22	"	66	42	B	98	62	b
3	03	ETX	35	23	#	67	43	C	99	63	c
4	04	EOT	36	24	\$	68	44	D	100	64	d
5	05	ENQ	37	25	%	69	45	E	101	65	e
6	06	ACK	38	26	&	70	46	F	102	66	f
7	07	BEL	39	27	'	71	47	G	103	67	g
8	08	BS	40	28	(72	48	H	104	68	h
9	09	HT	41	29)	73	49	I	105	69	i
10	0A	LF	42	2A	*	74	4A	J	106	6A	j
11	0B	VT	43	2B	+	75	4B	K	107	6B	k
12	0C	FF	44	2C	,	76	4C	L	108	6C	l
13	0D	CR	45	2D	-	77	4D	M	109	6D	m
14	0E	SO	46	2E	.	78	4E	N	110	6E	n
15	0F	SI	47	2F	/	79	4F	O	111	6F	o
16	10	DLE	48	30	0	80	50	P	112	70	p
17	11	DC1	49	31	1	81	51	Q	113	71	q
18	12	DC2	50	32	2	82	52	R	114	72	r
19	13	DC3	51	33	3	83	53	S	115	73	s
20	14	DC4	52	34	4	84	54	T	116	74	t
21	15	NAK	53	35	5	85	55	U	117	75	u
22	16	SYN	54	36	6	86	56	V	118	76	v
23	17	ETB	55	37	7	87	57	W	119	77	w
24	18	CAN	56	38	8	88	58	X	120	78	x
25	19	EM	57	39	9	89	59	Y	121	79	y
26	1A	SUB	58	3A	:	90	5A	Z	122	7A	z
27	1B	ESC	59	3B	;	91	5B	[123	7B	{
28	1C	FS	60	3C	<	92	5C	\	124	7C	
29	1D	GS	61	3D	=	93	5D]	125	7D	}
30	1E	RS	62	3E	>	94	5E	^	126	7E	~
31	1F	US	63	3F	?	95	5F	_	127	7F	DEL ¹

¹ Not ASCII Text

Appendix D: ASCII text

This appendix is not part of the *FITS Standard*; the material in it is based on the ANSI standard for ASCII (?) and is included here for informational purposes.)

In Table ??, the first column is the decimal and the second column the hexadecimal value for the character in the third column. The characters hexadecimal 20 to 7E (decimal 32 to 126) constitute the subset referred to in this document as the restricted set of *ASCII text* characters.

Appendix E: IEEE floating-point formats

The material in this *Appendix* is not part of this *Standard*; it is adapted from the IEEE-754 floating-point standard (?) and provided for informational purposes. It is not intended to be a comprehensive description of the IEEE formats; readers should refer to the IEEE standard.)

FITS recognizes all IEEE basic formats, including the special values.


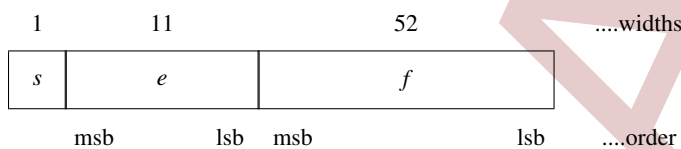
E.1. Basic formats

Numbers in the single and double formats are composed of the following three fields:

- 1-bit sign s ,
- Biased exponent $e = E + bias$ a biased exponent $e = E + bias$, and
- Fraction $f = \bullet b_1 b_2 \dots b_{p-1}$.

Table E.1: Summary of format parameters.

Parameter	Format			
	Single	Single extended	Double	Double extended
p	24	≥ 32	53	≥ 64
E_{max}	+127	$\geq +1023$	+1023	$\geq +16383$
E_{min}	-126	≤ -1022	-1022	≤ -16382
Exponent <i>bias</i>	+127	unspecified	+1023	unspecified
Exponent width in bits	8	≥ 11	11	≥ 15
Format width in bits	32	≥ 43	64	≥ 79

Fig. E.1: Single Format. **msb** means **most significant bit**, **lsb** means **least significant bit**.Fig. E.2: Double Format. **msb** means **most significant bit**, **lsb** means **least significant bit**.

The range of the unbiased exponent E shall include every integer between two values E_{min} and E_{max} , inclusive, and also two other reserved values $E_{min} - 1$ to encode ± 0 and denormalized numbers, and $E_{max} + 1$ to encode $\pm \infty$ and NaNs. The foregoing parameters are given in Table ???. Each nonzero numerical value has just one encoding. The fields are interpreted as follows: .

E.1.1. Single

A 32-bit **single format** number X is divided as shown in Fig. ?. The value v of X is inferred from its constituent fields thus .

1. If $e = 255$ and $f \neq 0$, then v is NaN regardless of s .
2. If $e = 255$ and $f = 0$, then $v = (-1)^s \infty$.
3. If $0 < e < 255$, then $v = (-1)^s 2^{e-127} (1 \bullet f)$.
4. If $e = 0$ and $f \neq 0$, then $v = (-1)^s 2^{e-126} (0 \bullet f)$ (denormalized numbers).
5. If $e = 0$ and $f = 0$, then $v = (-1)^s 0$ (zero).

E.1.2. Double

A 64-bit **double format** number X is divided as shown in Fig. ?. The value v of X is inferred from its constituent fields thus .

1. If $e = 2047$ and $f \neq 0$, then v is NaN regardless of s .
2. If $e = 2047$ and $f = 0$, then $v = (-1)^s \infty$.
3. If $0 < e < 2047$, then $v = (-1)^s 2^{e-1023} (1 \bullet f)$.
4. If $e = 0$ and $f \neq 0$, then $v = (-1)^s 2^{e-1022} (0 \bullet f)$ (denormalized numbers).
5. If $e = 0$ and $f = 0$, then $v = (-1)^s 0$ (zero).

E.2. Byte patterns

Table ?? shows the types of IEEE floating-point value, whether regular or special, corresponding to all **double and single precision** hexadecimal byte patterns.

Table E.2: IEEE floating-point formats.

IEEE value	Double precision	Single precision
+0	00000000000000000000000000000000	0000000000000000
denormalized	0000000000000001 to 0000000000000000	000000100000001 to 007FFFFF007FFFFF
positive underflow	0010000000000000 to 0010000000000001	0080000000800000 to 0080000100800001
positive numbers	0010000000000001 to 7FEFFFFFFF7FEFFFFFFF	0080000100800001 to 7F7FFFFE7F7FFFFE
positive overflow	7FEFFFFFFF7FEFFFFFFF to 7FF0000000000000	7F7FFFFE7F7FFFFE to 7F8000007F800000
+∞	7FF0000000000000	7F8000007F800000
NaN ¹	7FF0000000000001 to 7FFFFFFF7FFFFFFF	7F8000017F800001 to 7FFFFFFF7FFFFFFF
−0	8000000000000000	8000000080000000
negative	8000000000000001 to 8000000000000000	8000000180000001 to 807FFFFF807FFFFF
denormalized	8000000000000000 to 8010000000000000	807FFFFF807FFFFF to 8080000080800000
negative underflow	8010000000000000 to 8010000000000001	8080000080800000 to 8080000180800001
negative numbers	8010000000000001 to FFEFFFFFFF7FEFFFFFFF	8080000180800001 to FF7FFFFE7F7FFFFE
negative overflow	FFEFFFFFFF7FEFFFFFFF to FFF0000000000000	FF7FFFFE7F7FFFFE to FF7FFFFF7FFFFF
−∞	FFF0000000000000	FF800000FF800000
NaN ¹	FFF0000000000001 to FFFFFFFF7FFFFFFF	FF800001FF800001 to FFFFFFFF

¹ Certain values may be designated as *quiet* NaN (no diagnostic when used) or *signaling* (produces diagnostic when used) by particular implementations.

Appendix F: Reserved extension type names

This *Appendix appendix* is not part of the *FITSstandardFITS Standard*, but is included for informational purposes. It describes the extension type names registered as of the date this *standard Standard* was issued.) A current list is available from the *FITSSupport Office web site FITS Support Office website* at <http://fits.gsfc.nasa.gov>.

F.1. Standard extensions

These three extension types have been approved by the IAUFWG and are defined in Sect. ?? of this *standard Standard* document as well as in the indicated *Astronomy and Astrophysics* journal articles.

- 'IMAGE_???' – This extension type provides a means of storing a multi-dimensional array similar to that of the *FITSFITS* primary header and data unit. Approved as a standard extension in 1994 (?).
- 'TABLE_???' – This *ASCII table ASCII-table* extension type contains rows and columns of data entries expressed as ASCII characters. Approved as a standard extension in 1988 (?).
- 'BINTABLE' – This *binary table binary-table* extension type provides a *more flexible more-flexible* and efficient means of storing data structures than is provided by the *TABLETABLE* extension type. The table rows can contain a mixture of numerical, logical, and character data entries. In addition, each entry is allowed to be a *single dimensioned single-dimensioned* array. Numeric data are kept in binary formats. Approved as a standard extension in 1994 (?).

F.2. Conforming extensions

These conventions meet the requirements for a conforming extension as defined in in Sect. ?? of this *standardStandard*, however they have not been formally approved or endorsed by the IAUFWG.

- 'IUEIMAGE' – This name was given to the prototype of the *IMAGEIMAGE* extension type and was primarily used in the IUE project data archive from approximately 1992 to 1994. Except for the name, the format is identical to the *IMAGEIMAGE* extension.
- 'A3DTABLE' – This name was given to the prototype of the *BINTABLEBINTABLE* extension type and was primarily used in the AIPS data processing system developed at NRAO from about 1987 until it was replaced by *BINTABLEBINTABLE* in the early 1990s. The format is defined in the 'Going AIPS' manual (?), Chapter 14. It is very similar to the *BINTABLEBINTABLE* type except that it does not support the variable-length*array-array* convention.
- 'FOREIGN_?' – This extension type is used to put a *FITSFITS* wrapper about an arbitrary file, allowing a file or tree of files to be wrapped up in *FITSFITS* and later restored to disk. A full description of this extension type is given in the Registry of *FITSFITS* conventions on the *FITSSupport Office web siteFITS Support Office website*.
- 'DUMP_???' – This extension type can be used to store a stream of *binary data binary-data* values. The only known use of this extension type is to record telemetry header packets for data from the Hinode mission. The *more general*

FOREIGNmore-general FOREIGN extension type could also be used to store this type of data.

F.3. Other suggested extension names

There have been occasional suggestions for other extension names that might be used for other specific purposes. These include a *COMPRESSCOMPRESS* extension for storing compressed images, a *FITSFITS* extension for hierarchically embedding entire *FITSFITS* files within other *FITSFITS* files, and a *FILEMARKFILEMARK* extension for representing the equivalent of an end-of-file mark on *magnetic tape magnetic-tape* media. None of these extension types have been implemented or used in practice, therefore these names are not reserved. These extension names (or any other extension name not specifically mentioned in the previous sections of this appendix) *should notshould not* be used in any *FITSFITS* file without first registering the name with the IAU *FITS FITS* Working Group.

Appendix G: MIME types

This *Appendix appendix* is not part of the *FITSstandardFITS Standard*, but is included for informational purposes.

RFC 4047 (?) describes the registration of the Multipurpose Internet Mail Extensions (MIME) sub-types 'application/fitsapplication/fits' and 'image/fitsimage/fits' to be used by the international astronomical community for the interchange of *FITSFITS* files. The MIME type serves as an electronic tag or label that is transmitted along with the *FITSFITS* file that tells the receiving application what type of file is being transmitted. The remainder of this appendix has been extracted verbatim from the RFC 4047 document.

The general nature of the full *FITSstandard FITS Standard* requires the use of the media type 'application/fitsapplication/fits'. Nevertheless, the principal intent for a great many *FITSFITS* files is to convey a single data array in the primary HDU, and such arrays are very often *2-dimensional two-dimensional* images. Several common image viewing applications already display single-HDU *FITSFITS* files, and the prototypes for *virtual observatory virtual-observatory* projects specify that data provided by web services be conveyed by the data array in the primary HDU. These uses justify the registration of a second media type, namely 'image/fitsimage/fits', for files *which that* use the subset of the *standard Standard* described by the original *FITSstandard FITS Standard* paper. The MIME type 'image/fitsimage/fits' *may* be used to describe *FITSFITS* primary HDUs that have other than two dimensions, however it is expected that most files described as 'image/fitsimage/fits' will have two-dimensional (*NAXIS NAXIS =2 2*) primary HDUs.

G.1. MIME type 'application/fitsapplication/fits'

A *FITSFITS* file described with the media type 'application/fitsapplication/fits' *should* conform to the published standards for *FITSFITS* files as determined by convention and agreement within the international *FITSFITS* community. No other constraints are placed on the content of a file described as 'application/fitsapplication/fits'.

A *FITS* file described with the media type ‘application/fits’ may have an arbitrary number of conforming extension HDUs that follow its mandatory primary header and data unit. The extension HDUs may be one of the standard types (IMAGE, TABLE, and BINTABLE) or any other type that satisfies the ‘Requirements for Conforming Extensions’ (Sect. ??). The primary HDU or any IMAGE extension may contain zero to 999 dimensions with zero or more pixels along each dimension.

The primary HDU may use the random groups convention, in which the dimension of the first axis is zero and the keywords GROUPS, PCOUNT and GCOUNT appear in the header. PCOUNT and GCOUNT appear in the header. NAXIS1 = 0 and GROUPS = T is the signature of random groups; see Sect. ??.

G.1.1. Recommendations for application writers

An application intended to handle ‘application/fits’ should be able to provide a user with a manifest of all of the HDUs that are present in the file and with all of the keyword/value pairs from each of the HDUs.

An application intended to handle ‘application/fits’ should be prepared to encounter extension HDUs that contain either ASCII or binary tables, and to provide a user with access to their elements.

An application which can modify FITS files or retrieve FITS files from an external service should be capable of writing such files to a local storage medium.

Complete interpretation of the meaning and intended use of the data in each of the HDUs typically requires the use of heuristics that attempt to ascertain which local conventions were used by the author of the FITS file.

As examples, files with media type ‘application/fits’ might contain any of the following contents:

- An empty primary HDU (containing zero data elements) followed by a table HDU that contains a catalog of celestial objects.
- An empty primary HDU followed by a table HDU that encodes a series of time-tagged photon events from an exposure using an X-ray detector.
- An empty primary HDU followed by a series of IMAGE HDUs containing data from an exposure taken by a mosaic of CCD detectors.
- An empty primary HDU followed by a series of table HDUs that contain a snapshot of the state of a relational database.
- A primary HDU containing a single image along with keyword/value pairs of metadata.
- A primary HDU with NAXIS1 = 0 and GROUPS = T followed by random groups data records of complex fringe visibilities.

G.2. MIME type ‘image/fitsimage/fits’

A FITS file described with the media type ‘image/fitsimage/fits’ should have a primary HDU with positive integer values for the NAXIS and NAXISn keywords, and hence should contain at least one pixel. Files with 4 or more non-degenerate axes (NAXISn > 1) should be described as ‘application/fitsimage/fits’, not as ‘image/fitsimage/fits’. (In rare cases it may be appropriate to describe a NULL image – a dataless container for FITS keywords, with NAXIS = 0 or NAXISn = 0 – or an image with 4+ non-degenerate axes as ‘image/fitsimage/fits’ but this usage is discouraged because such files may confuse simple image viewer applications.)

FITS files declared as ‘image/fitsimage/fits’ may also have one or more conforming extension HDUs following their primary HDUs. These extension HDUs may contain standard, non-linear, world coordinate system (WCS) information in the form of tables or images. The extension HDUs may also contain other, non-standard metadata pertaining to the image in the primary HDU in the forms of keywords and tables.

A FITS file described with the media type ‘image/fitsimage/fits’ should be principally intended to communicate the single data array in the primary HDU. This means that ‘image/fitsimage/fits’ should not be applied to FITS files containing multi-exposure-frame mosaic images. Also, random groups files must be described as ‘application/fitsimage/fits’ and not as ‘image/fitsimage/fits’.

A FITS file described with the media type ‘image/fitsimage/fits’ is also valid as a file of media type ‘application/fitsimage/fits’. The choice of classification depends on the context and intended usage.

G.2.1. Recommendations for application writers

An application that is intended to handle ‘image/fitsimage/fits’ should be able to provide a user with a manifest of all of the HDUs that are present in the file and with all of the keyword/value pairs from each of the HDUs. An application writer may choose to ignore HDUs beyond the primary HDU, but even in this case the application should be able to present the user with the keyword/value pairs from the primary HDU.

Note that an application intended to render ‘image/fitsimage/fits’ for viewing by a user has significantly more responsibility than an application intended to handle, e.g., ‘image/tiff’ or ‘image/gif’. FITS data arrays contain elements which typically represent the values of a physical quantity at some coordinate location. Consequently they need not contain any pixel rendering information in the form of transfer functions, and there is no mechanism for color look-up tables. An application should provide this functionality, either statically using a more or less sophisticated algorithm, or interactively allowing a user various degrees of choice.

Furthermore, the elements in a FITS data array may be integers or floating-point numbers. The dy-

dynamic range of the **data array** `data-array` values may exceed that of the display medium and the eye, and their distribution may be highly **nonuniform**. Logarithmic, square-root, and quadratic transfer functions along with **histogram equalization** techniques have proved helpful for rendering **FITS** data arrays. Some elements of the array may have values **which that** indicate that their data are undefined or invalid; these **should** be rendered distinctly. Via WCS Paper I (?) the **standard permits CTYPE_n** Standard permits `CTYPEn = 'COMPLEX'` to assert that a data array contains complex numbers (future revisions might admit other elements such as quaternions or general tensors).

Three-dimensional data arrays (**NAXIS** `NAXIS = 3` with **NAXIS1**, **NAXIS2** and **NAXIS3** 3 with **NAXIS1**, **NAXIS2**, and **NAXIS3** all greater than 1) are of special interest. Applications intended to handle **'image/fits'** may default to displaying the first **2D** two-dimensional plane of such an image cube, or they may default to presenting such an image in a fashion akin to that used for an animated GIF, or they may present the data cube as a mosaic of 'thumbnail' images. The time-lapse movie-looping display technique can be effective in many instances, and application writers **should** consider offering it for all three-dimensional arrays.

An **'image/fits'** primary HDU with **NAXIS** `NAXIS = 1` is describing a one-dimensional entity such as a spectrum or a time series. Applications intended to handle **'image/fits'** may default to displaying such an image as a graphical plot rather than as a two-dimensional picture with a single row.

An application that cannot handle an image with dimensionality other than two **should** gracefully indicate its limitations to its users when it encounters **NAXIS** `NAXIS = 1` or **NAXIS** `NAXIS = 3` cases, while still providing access to the keyword/value pairs.

FITS files with degenerate axes (i.e., one or more **NAXIS_n** `NAXISn = 1`) may be described as **'image/fits'**, but the first axes **should** be non-degenerate (i.e., the degenerate axes **should** be the highest dimensions). An algorithm designed to render only two-dimensional images will be capable of displaying such an **NAXIS** `NAXIS = 3` or **NAXIS** `NAXIS = 4` array that has one or two of the axes consisting of a single pixel, and an application writer **should** consider coding this capability into the application. Writers of new applications that generate **FITS** files intended to be described as **'image/fits'** **should** consider using the **WCSEXES** keyword (?) to declare the dimensionality of such degenerate axes, so that **NAXIS** can be used to convey the number of non-degenerate axes.

G.3. File extensions

The **FITS** Standard originated in the era when files were stored and exchanged via magnetic tape; it does not prescribe any nomenclature for files on disk. Various sites within the **FITS** community have long-established practices where files are presumed to be **FITS** by context. File extensions used at such sites commonly indicate content of the file instead of the data format.

In the absence of other information it is reasonably safe to presume that a file name ending in **'fits.fits'** is intended to be a **FITS** file. Nevertheless, there are other commonly used extensions; e.g., **'fit.fit'**, **'fts.fts'**, and many others not suitable for listing in a media type registration.

Appendix H: Past changes or clarifications to the formal definition of **FITS**

*This Appendix is not part of the **FITS** Standard, but is included for informational purposes.*

H.1. Differences between the requirements in this **Standard** and the requirements in the original **FITS** papers.

1. Sect. ?? : The original **FITS** definition paper (?) disallows **lower case** letters in the keyword name, but does not specify what other characters may or may not appear in the name.
2. Sect. ?? : The slash between the value and comment is 'recommended' in the original paper (?) whereas the **Standard** requires that it be present, which is consistent with the prescription of Fortran list-directed input.
3. Sect. ?? : The original paper (?) speculated that **FITS** would eventually support the full range of flexibility that is allowed by Fortran list-directed input, including dimensioned parameters. The **Standard** restricts the value field to a single value, not an array.
4. Sect. ?? and Sect. ?? : The original paper (?) defined a fixed format for complex keyword values, with the real part right justified in **bytes** 11 through 30 and the imaginary part right justified in **bytes** 31 through 50. There are no known **FITS** files that use this fixed format. The **Standard** does not define a fixed format for complex keyword values. Instead, complex values are represented in conformance with the rules for Fortran list-directed input, namely, with the real and imaginary parts separated by a comma and enclosed in parentheses.
5. Sect. 4.4.1.1 and Sect. 4.4.1.2: The paper that defines generalized extensions (?) does not prohibit the appearance of the **SIMPLE** keyword in extensions nor the **XTENSION** keyword in the primary header.

H.2. List of modification to the **FITS** Standard, version 3.0

After the IAUFWG officially approved **version 3** of the **FITS** Standard in 2008, the following additional corrections, clarifications, or format modifications have been made to the document.

1. Two typographical errors in Table ?? (previously Table 8.1) were corrected. The last **2** lines of the third column should read **'LONPOLEa LONPOLEa (= PVi_3a)PVi_3a'** and **'LATPOLEa LATPOLEa (= PVi_4a)PVi_4a'**, instead of **PVi_1a** and **PVi_2a**, respectively. (October 2008)
2. The **latex** text source document was reformatted to conform to the Astronomy & Astrophysics journal page style (June 2010). The visible changes include the following: .

- The tables, figures, equations, and footnotes are numbered sequentially throughout the entire the document, instead of sequentially within each chapter.
 - The citations use the standard ‘Author (year)’ format instead of being referenced by a sequential number. Also, the ‘Bibliography’ section at the end of the document has been replaced by a ‘References’ section in which the citations are listed alphabetically by author.
3. The following minor corrections or clarifications were made during the refereeing process after submitting **version 3 of the FITSstandard Version 3.0 of the FITS Standard** for publication in the *Astronomy & Astrophysics journal* (July 2010):
- A sentence was added to the end of Sect. ??: ‘This **web site website** also contains the contact information for the Chairman of the IAUFWG, to whom any questions or comments regarding this **standard Standard** should be addressed.’
 - A ‘Section’ column was added to Table ?? to reference the relevant section of the document.
 - The wording of the second sentence in Sect. ?? was revised from ‘Except where specifically stated otherwise in this standard, keywords may appear in any order.’ to ‘Keywords may appear in any order except where specifically stated otherwise in this **standard Standard**.’
 - A sentence was added to the end of the ‘Keyword name’ subsection in Sect. ??: ‘Note that keyword names that begin with (or consist solely of) any combination of hyphens, underscores, and digits are legal.’
 - A footnote to the description of the **REFERENC** keyword in Sect. ?? was added: ‘This bibliographic convention (Schmitz 1995) was initially developed for use within NED (NASA/IPAC Extragalactic Database) and SIMBAD (operated at CDS, Strasbourg, France).’
 - In Sect. ??, the phrase ‘**TFORMn TFORMn** format code’ was corrected to read ‘**TDISPn TDISPn** format code’ (in four places).
 - The wording in the ‘Expressed as’ column in Table ?? for the ‘**LOG**’, ‘**GRI**’, ‘**GRA**’, and ‘**TAB**’ LOG, GRI, GRA, and TAB spectral algorithm codes was clarified.
 - In Table ?? the **EXTNAME**, **EXTVER**, and **EXTLEVEL** ?? the **EXTNAME**, **EXTVER**, and **EXTLEVEL** keywords were moved under the ‘All HDUs’ column because they are now allowed in the primary array header.
 - The last paragraph of Sect. 4.1.2.3 was corrected to state that the **ASCII text ASCII-text** characters have hexadecimal values 20 through 7E, not 41 through 7E.

H.3. List of modifications to the latest **FITS standardFITS Standard**

1. The representation of time coordinates has been incorporated by reference from ? and is summarized in Sect. ?. Cross-references have been inserted in pre-existing sections of the Standard (namely in **SectSects. ??, ??, ??,1, ??,2** and ??, as well as in various places of Sect. ??, **like ?? and such as Sect. ?? and Sect. ??**). New keywords are listed in a re-arranged Table ?. Contextually an erratum was applied in Sect. ?: keywords OBSGEO-[XYZ] were incorrectly marked as OBSGEO-[XYZ]a; the TAI-UTC difference in Table ?? was updated with respect to ? taking into account the latest leap second; the possibility of introducing more sources for the **solar system Solar System** ephemerides was re-worded (at the end of Sect.?? and in Table ??).
2. The continued string keywords described in Sect. ??,2 were originally introduced as a **FITSconvention since FITS convention during** 1994, and registered in 2007. The text of the original convention is reported at http://fits.gsfc.nasa.gov/registry/continue_keyword.html. The differences with this **standard concern : Standard concern the following**.
 - In the convention, the **LONGSTRN** keyword was used to signal the possible presence of long strings in the HDU. The use of this keyword is no longer **required or recommendedrequired or recommended**.
 - Usage of the convention was **not recommendednot recommended** for reserved or mandatory keywords. Now it is *explicitly forbidden* unless keywords are explicitly declared long-string.
 - To avoid ambiguities in the application of the previous clause, the declaration of string keywords in **sections Sects. ??, ?? and ??** has been reset from the generic ‘character’ to ‘string’.
 - It is also explicitly clarified there is no limit to the number of continuation records.
 - The description of continued comment field is new.
3. The blank header space convention described in Sect. ??,4 was used **since from** 1996, and registered in 2014. The text of the original convention is reported at <http://fits.gsfc.nasa.gov/registry/headerspace.html>. It included a *recommendation* about using the convention in a controlled environment, which does not appear in this **standard Standard**.
4. The **INHERIT** keyword described in Sect. ??,6 was originally introduced as a **FITSFITS** convention in 1995, and registered in 2007. The text of the original convention is reported at <http://fits.gsfc.nasa.gov/registry/inherit.html>. See also references and practical considerations therein. The differences with the present document concern a **more precise RFC-2219 more-precise RFC 2119** compliant wording in a couple of sentences in Appendix ??.
5. The checksum keywords described in Sect. ??,7 were originally introduced as a **FITSconvention since FITS convention during** 1994, and registered in 2007. The text of the original convention is reported at <http://fits.gsfc.nasa.gov/registry/checksum.html>. The differences with this **standard Standard** concern:
 - **The the** omission of some additional implementation guidelines. , and
 - **The the** omission of a discussion on alternate algorithms and relevant additional references.
6. The table keywords described in Sect. ?? and ?? were originally introduced as a **FITSconvention since FITS convention during** 1993, and registered in 2006. The text of the original convention is reported at <http://fits.gsfc.nasa.gov/registry/colminmax.html>. The differences with this **standard concern: Standard are as follows**.

- The exclusion of undefined or IEEE special values when computing maximum and minimum is now *mandatory* while it was *optional*.
 - The original text included the possibility of using the fact **TDMINn**TDMINn were greater than **TDMAXn**(or **TLMINn**greater than **TLMAXn**TDMAXn (or **TLMINn**greater than **TLMAXn**) as an indication the values were undefined. This clause has been removed
 - The original text contained usage examples and additional minor explanatory details.
7. The Green Bank convention, mentioned in Sect. ?? and described in Appendix ??, has been in use since 1989, and was registered in 2010. The text of the registered convention is reported at <http://fits.gsfc.nasa.gov/registry/greenbank/greenbank.pdf> and contains some additional details about the history of the convention.
 8. The conventions for compressed data described in Sect. ?? were originally introduced as a couple of **FITS***FITS* conventions registered in 2007 and 2013. The text of the original conventions is reported at <http://fits.gsfc.nasa.gov/registry/tilecompression.html> for compressed images and at <http://fits.gsfc.nasa.gov/registry/tiletablecompression.html> for compressed binary tables. The differences with this **standard concern**: Standard are listed below.
 - In Sect. ?? the original text for **FZALGn** mentioned the possibility that, ‘If the column cannot be compressed with the requested algorithm (e.g., if it has an inappropriate data type), then a default compression algorithm will be used instead.’ But there is no default algorithm. This is irrelevant for the Standard.
 - In Sect. ?? the alias ‘**RICE.ONE**’ is *not* adopted in the Standard as a synonym for ‘**RICE.1**’.
 - In Sect. ?? a sentence was left out about requiring additional instructions in **PLIO** to make it work for more than 2^{12} bits, since we aren’t allowing this possibility in the Standard.
 - In Sect. ?? the reference to a ‘smoothing flag’ was dropped.
 - Also in Sect. ?? the *scale factor* is now floating point, while it was originally integer.
 - In Table ?? (and Sect. ??) the ‘**NOCOMPRESS**’ algorithm is explicitly mentioned.

H.4. List of modifications for language editing

1. Apply systematically **LaTeX** macros for keyword names and values, and for RFC 2119 expressions, according to instructions reported in the **LaTeX** source preamble (for future editors of the Standard).
2. The acronym *FITS* is always indicated in italics.
3. Use italics systematically for RFC 2119 obligations and recommendations.
4. Apply consistent use of italic and typewriter fonts, and ‘ quotation marks around literal keyword values. Correct other minor **LaTeX** issues.
5. Apply systematic capitalization of the names of specific entities, where appropriate. These include Standard (when referring to the *FITS* Standard document), Version (where numbered), Byte, Column, Parameter, Field, and Axis. Start some

words with a lower-case letter that previously began with a capital letter.

6. Address other typographical issues, such as the insertion of commas in several places, adding a few non-breaking spaces, and better handling of references to sections, etc.
7. Several cases of minor rewording.
8. Express small numbers in letter form (one to nine), not in numerals (1 to 9), wherever sensible. However, there is the customary exception for normalization in sentences and headings that also contain numbers greater than nine.
9. Compound nouns are systematically hyphenated to highlight the correct grouping (and hence meaning) of the components. This includes the attributive references to **ASCII-table**, **binary-table**, and **random-groups**.
10. Improve the aesthetics of some tables.

Appendix I: Random Number GeneratorRandom-number generator

This *Appendix appendix* is not part of the *FITSstandardFITS Standard*, but is included for informational purposes.

The portable **random number** random-number generator algorithm below is from ?. This algorithm repeatedly evaluates the function

$$seed = (a * seed) \bmod m$$

where the values of *a* and *m* are shown below, but it is implemented in a way to avoid integer overflow problems.

```
int random_generator(void) {
/* initialize an array of random numbers */

int ii;
double a = 16807.0;
double m = 2147483647.0;
double temp, seed;
float rand_value[10000];

/* initialize the random numbers */
seed = 1;
for (ii = 0; ii < N_RANDOM; ii++) {
temp = a * seed;
seed = temp - m * ((int) (temp / m) );
/* divide by m for value between 0 and 1 */
rand_value[ii] = seed / m;
}
}
```

If implemented correctly, the $10\,000^{th}$ $10\,000^{th}$ value of seed will equal 1 043 618 065.

Appendix J: CHECKSUMImplementation GuidelinesCHECKSUM implementation guidelines

This *Appendix appendix* is not part of the *FITSstandardFITS Standard*, but is included for informational purposes.

J.1. Recommended *CHECKSUM* Keyword Implementation *CHECKSUM* keyword implementation

The recommended *CHECKSUM* keyword algorithm described here generates a 16-character ASCII string that forces the 32-bit 1's ones' complement checksum accumulated over the entire *FITS* HDU to equal negative 0 (all 32 bits equal to 1). In addition, this string will only contain alphanumeric characters within the ranges 0–9, A–Z, and a–z to promote human readability and transcription. If the present algorithm is used, the *CHECKSUM* keyword value must be expressed in fixed format, with the starting single quote character in column 11 and the ending single quote character in column 28 of the *FITS* keyword record, because the relative placement of the value string within the keyword record affects the computed HDU checksum. The steps in the algorithm are as follows: .

1. Write the *CHECKSUM* keyword into the HDU header with an initial value consisting of 16 ASCII zeros ('0000000000000000' '0000000000000000') where the first single quote character is in column 11 of the *FITS* keyword record. This specific initialization string is required by the encoding algorithm described in Sect. ???. The final comment field of the keyword, if any, must also be written at this time. It is recommended that the current date and time be recorded in the comment field to document when the checksum was computed.
2. Accumulate the 32-bit 1's ones' complement checksum over the *FITS* logical records that make up the HDU header in the same manner as was done for the data records by interpreting each 2880-byte logical record as 720 32-bit unsigned integers.
3. Calculate the checksum for the entire HDU by adding (using 1's ones' complement arithmetic) the checksum accumulated over the header records to the checksum accumulated over the data records (i.e., the previously computed *DATASUM* keyword value).
4. Compute the bit-wise complement of the 32-bit total HDU checksum value by replacing all 0 bits with 1 and all 1 bits with 0.
5. Encode the complement of the HDU checksum into a 16-character ASCII string using the algorithm described in Sect. ??.
6. Replace the initial *CHECKSUM* keyword value with this 16-character encoded string. The checksum for the entire HDU will now be equal to negative 0.

J.2. Recommended ASCII Encoding Algorithm encoding algorithm

The algorithm described here is used to generate an ASCII string, which, when substituted for the value of the *CHECKSUM* keyword, will force the checksum for the entire HDU to equal negative 0. It is based on a fundamental property of 1's ones' complement arithmetic that the sum of an integer and the negation of that integer (i.e, the bitwise complement formed by replacing all 0 bits with 1s and all 1 bits with 0s) will equal negative 0 (all bits set to 1). This principle is applied here by constructing a 16-character string, which, when

interpreted as a byte stream of four 32-bit integers, has a sum that is equal to the complement of the sum accumulated over the rest of the HDU. This algorithm also ensures that the 16 bytes that make up the four integers all have values that correspond to ASCII alpha-numeric characters in the range 0–9, A–Z, and a–z.

1. Begin with the 1's ones' complement (replace 0s with 1s and 1s with 0s) of the 32-bit checksum accumulated over all the *FITS* records in the HDU after first initializing the *CHECKSUM* keyword with a fixed-format string consisting of 16 ASCII zeros ('0000000000000000' '0000000000000000').
2. Interpret this complemented 32-bit value as a sequence of four unsigned 8-bit integers, A, B, C and D, where A is the most significant byte and D is the least significant byte. Generate a sequence of four integers, A1, A2, A3, A4, B1, B2, B3, B4, C1, C2, C3, C4, D1, D2, D3, D4, that are all equal to the original byte value divided by 4 (truncated to an integer if necessary). If the original byte value is not evenly divisible by 4, add the remainder to the first integer. The key property to note here is that the sum of the four new integers is equal to the original byte value (e.g., $A = A1 + A2 + A3 + A4$). Perform a similar operation on B, C, and D, resulting in a total of 16 integer values, 4 from each of the original bytes, which should be rearranged in the following order:

A1 B1 C1 D1 A2 B2 C2 D2 A3 B3 C3 D3 A4 B4 C4 D4 .

Each of these integers represents one of the 16 characters in the final *CHECKSUM* keyword value. Note that if this byte stream is interpreted as 4 32-bit integers, the sum of the integers is equal to the original complemented checksum value.

3. Add 48 (hex 30), which is the value of an ASCII zero character, to each of the 16 integers generated in the previous step. This places the values in the range of ASCII alphanumeric characters '0' (ASCII zero) to 'r'. This offset is effectively subtracted back out of the checksum when the initial *CHECKSUM* keyword value string of 16 ASCII 0s is replaced with the final encoded checksum value.
4. To improve human readability and transcription of the string, eliminate any non-alphanumeric characters by considering the bytes a pair at a time (e.g., $A1 + A2, A3 + A4, B1 + B2, B3 + B4, C1 + C2, C3 + C4, D1 + D2, D3 + D4$, etc.) and repeatedly increment the first byte in the pair by 1 and decrement the second byte by 1 as necessary until they both correspond to the ASCII value of the allowed alphanumeric characters 0–9, A–Z, and a–z shown in Figure 1. Note that this operation conserves the value of the sum of the 4 equivalent 32-bit integers, which is required for use in this checksum application.
5. Cyclically shift all 16 characters in the string one place to the right, rotating the last character (D4) to the beginning of the string. This rotation compensates for the fact that the fixed format *FITS* character string values are not aligned on 4-byte word boundaries in the *FITS* file. (The first character of the string starts in column 12 of the header card image, rather than column 13).

Fig. J.1: Only ASCII alpha-numeric characters are used to encode the checksum – punctuation is excluded

6. Write this string of 16 characters to the value of the **CHECKSUMCHECKSUM** keyword, replacing the initial string of 16 ASCII zeros.

To invert the ASCII encoding, cyclically shift the 16 characters in the encoded string one place to the left, subtract the hex 30 offset from each character, and calculate the checksum by interpreting the string as four 32-bit unsigned integers. This can be used, for instance, to read the value of **CHECKSUMCHECKSUM** into the software when verifying or updating a HDU.

J.3. Encoding Exampleexample

This example illustrates the encoding algorithm given in Sect. ?? Consider a **FITSHDU** whose 1's **FITS** HDU whose ones' complement checksum is 868229149, which is equivalent to hex **33C0201D33C0201D**. This number was obtained by accumulating the 32-bit checksum over the header and data records using 1's ones' complement arithmetic after first initializing the **CHECKSUMCHECKSUM** keyword value to '0000000000000000'0000000000000000'. The complement of the accumulated checksum is 3426738146, which is equivalent to hex **CC3FDFE2CC3FDFE2**. The steps needed to encode this hex value into ASCII are shown schematically below: .

Byte				Preserve byte alignment																				
A	B	C	D	A1	B1	C1	D1	A2	B2	C2	D2	A3	B3	C3	D3	A4	B4	C4	D4					
CC	3F	DF	E2	->	33	0F	37	38	33	0F	37	38	33	0F	37	38	33	0F	37	38				
+ remainder					0	3	3	2																
= hex					33	12	3A	3A	33	0F	37	38	33	0F	37	38	33	0F	37	38				
+ 0 offset					30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30				
= hex					63	42	6A	6A	63	3F	67	68	63	3F	67	68	63	3F	67	68				
ASCII					c	B	j	j	c	?	g	h	c	?	g	h	c	?	g	h				
Eliminate punctuation characters																								
initial values	c	B	j	j	c	?	g	h	c	?	g	h	c	?	g	h	c	?	g	h				
.	c	C	j	j	c	>	g	h	c	@	g	h	c	>	g	h	c	>	g	h				
.	c	D	j	j	c	=	g	h	c	A	g	h	c	=	g	h	c	=	g	h				
.	c	E	j	j	c	<	g	h	c	B	g	h	c	<	g	h	c	<	g	h				
.	c	F	j	j	c	;	g	h	c	C	g	h	c	;	g	h	c	;	g	h				
.	c	G	j	j	c	:	g	h	c	D	g	h	c	:	g	h	c	:	g	h				
final values	c	H	j	j	c	9	g	h	c	E	g	h	c	9	g	h	c	9	g	h				
final string	"hcHjJc9ghcEghc9g" (rotate 1 place to the right)																							

In this example **byte B1** **Byte B1** (originally ASCII **BB**) is shifted higher (to ASCII **HH**) to balance **byte B2** **Byte B2** (originally ASCII **??**) being shifted lower (to ASCII **99**). Similarly, **bytes B3** and **B4** **Bytes B3** and **B4** are shifted by opposing amounts. This is possible because the two sequences of ASCII punctuation characters that can occur in encoded checksums are both preceded and followed by longer sequences of

ASCII alphanumeric characters. This operation is purely for cosmetic reasons to improve readability of the final string.

This is how these **CHECKSUM** and **DATASUM** **CHECKSUM** and **DATASUM** keywords would appear in a **FITSFITS** header (with the recommended time stamp in the comment field). :

```
DATASUM = '2503531142' / 2015-06-28T18:30:45
CHECKSUM= 'hcHjJc9ghcEghc9g' / 2015-06-28T18:30:45
```

J.4. Incremental Updating updating of the Checksumchecksum

The symmetry of 1's ones' complement arithmetic also means that after modifying a **FITSFITS** HDU, the checksum **may** **may** be incrementally updated using simple arithmetic without accumulating the checksum for portions of the HDU that have not changed. The new checksum is equal to the old total checksum plus the checksum accumulated over the modified records, minus the original checksum for the modified records.

An incremental update provides the mechanism for end-to-end checksum verification through any number of intermediate processing steps. By *calculating* rather than *accumulating* the intermediate checksums, the original checksum test is propagated through to the final data file. On the other hand, if a new checksum is accumulated with each change to the HDU, no information is preserved about the HDU's original state.

The recipe for updating the **CHECKSUMCHECKSUM** keyword following some change to the HDU is: $C' = C - m + m'$, where C and C' represent the HDU's checksum (that is, the complement of the **CHECKSUMCHECKSUM** keyword) before and after the modification and m and m' are the corresponding checksums for the modified **FITSFITS** records or keywords only. Since the **CHECKSUMCHECKSUM** keyword contains the complement of the checksum, the correspondingly complemented form of the recipe is more directly useful: $\sim C' = \sim(C + \sim m + m')$, where \sim (tilde) denotes the (1's ones') complement operation. See ????. Note that the tilde on the right hand side of the equation cannot be distributed over the contents of the parentheses due to the dual nature of zero in 1's ones' complement arithmetic (?).

J.5. Example C Code code for Accumulating accumulating the Checksumchecksum

The 1's ones' complement checksum is simple and fast to compute. This routine assumes that the input records are a multiple of 4 four bytes long (as is the case for **FITS FITS** logical records), but it is not difficult to allow for odd length records if necessary. To use this routine, first initialize the **CHECKSUM** keyword to '0000000000000000' and initialize **sum32 = 0** **CHECKSUM** keyword to '0000000000000000' and initialize **sum32 = 0**, then step through all the **FITSFITS** logical records in the **FITS FITS** HDU.

```
void checksum (
    unsigned char *buf, /* Input array of bytes to be checksummed */
                    /* (interpret as 4-byte unsigned ints) */
    int length, /* Length of buf array, in bytes */
              /* (must be multiple of 4) */
    unsigned int *sum32) /* 32-bit checksum */
{
    /*
    Increment the input value of sum32 with the 1's complement sum
    accumulated over the input buf array.
    */
    unsigned int hi, lo, hicarry, locarry, i;
```

```

/* Accumulate the sum of the high-order 16 bits and the */
/* low-order 16 bits of each 32-bit word, separately. */
/* The first byte in each pair is the most significant. */
/* This algorithm works on both big and little endian machines.*/
hi = (*sum32 >> 16);
lo = *sum32 & 0xFFFF;
for (i=0; i < length; i+=4) {
    hi += ((buf[i] << 8) + buf[i+1]);
    lo += ((buf[i+2] << 8) + buf[i+3]);
}

/* fold carry bits from each 16 bit sum into the other sum */
hicarry = hi >> 16;
locarry = lo >> 16;
while (hicarry || locarry) {
    hi = (hi & 0xFFFF) + locarry;
    lo = (lo & 0xFFFF) + hicarry;
    hicarry = hi >> 16;
    locarry = lo >> 16;
}

/* concatenate the full 32-bit value from the 2 halves */
*sum32 = (hi << 16) + lo;
}

```

J.6. Example C Code code for ASCII Encodingencoding

This routine encodes the complement of the 32-bit HDU checksum value into a 16-character string. The byte alignment of the string is permuted one place to the right for *FITS* to left justify the string value starting in **column** Column 12.

```

unsigned int exclude[13] = {0x3a, 0x3b, 0x3c, 0x3d, 0x3e, 0x3f, 0x40,
                          0x5b, 0x5c, 0x5d, 0x5e, 0x5f, 0x60 };

int offset = 0x30; /* ASCII 0 (zero) */
unsigned long mask[4] = { 0xff000000, 0xff0000, 0xff00, 0xff };

void char_encode (
    unsigned int value, /* 1's complement of the checksum */
    /* value to be encoded */
    char *ascii) /* Output 16-character encoded string */
{
    int byte, quotient, remainder, ch[4], check, i, j, k;
    char asc[32];

    for (i=0; i < 4; i++) {
        /* each byte becomes four */
        byte = (value & mask[i]) >> ((3 - i) * 8);
        quotient = byte / 4 + offset;
        remainder = byte % 4;
        for (j=0; j < 4; j++)
            ch[j] = quotient;

        ch[0] += remainder;

        for (check=1; check;) /* avoid ASCII punctuation */
            for (check=0, k=0; k < 13; k++)
                for (j=0; j < 4; j+=2)
                    if (ch[j]==exclude[k] || ch[j+1]==exclude[k]) {
                        ch[j]++;
                        ch[j+1]--;
                        check++;
                    }

        for (j=0; j < 4; j++) /* assign the bytes */
            asc[4*j+i] = ch[j];
    }

    for (i=0; i < 16; i++) /* permute the bytes for FITS */
        ascii[i] = asc[(i+15)%16];

    ascii[16] = 0; /* terminate the string */
}

```

Appendix K: Header inheritance convention

This *Appendix appendix* is not part of the *FITSstandardFITS Standard*, but is included for informational purposes.

The reserved **boolean** *INHERITBoolean* *INHERIT* keyword described in Sect. ??.6 is *optionaloptional*, but if present it *shallshall* appear in the extension header immediately after the mandatory keywords. The *INHERITkeyword must notINHERIT keyword must not* appear in the primary header. Keyword inheritance provides a mechanism to store keywords in the primary HDU, and have them be shared by one or more extensions in the file. This mechanism minimizes duplication (and maintenance) of metadata in multi-extension *FITS FITS* files.

It *shouldshould* only be used in *FITSFITS* files that have a null primary array (e.g., with *NAXIS NAXIS =0 0*). to avoid possible confusion if array-specific keywords (e.g., *BSCALEand BZEROBSCALE and BZERO*) were to be inherited.

When an application reads an extension header with *INHERIT INHERIT =T*, it *should T*, it *should* merge the keywords in the current extension with the primary header keywords. The exact merging mechanism is left up to the application. The mandatory primary array keywords (e.g., *BITPIX, NAXIS, and NAXISnBITPIX, NAXIS, and NAXISn*) and any *COMMENT, HISTORYCOMMENT, HISTORY*, and blank keywords in the primary header *must notmust not* be inherited. It is assumed also that the table-specific keywords described in Sect. ?? and ??, and the table-specific WCS keywords described in Sect. ??, cannot be inherited since they will never appear in the primary header. If the same keyword is present in both the primary header and the extension header, the value in the extension header *shallshall* take precedence. If *INHERIT INHERIT =F F* in an extension header, the keywords from the primary header *shouldnot should not* be inherited.

An application *which that* merely reads a *FITS FITS* file is authorized by *INHERIT INHERIT =T T* to look in the primary HDU for an expected keyword not found in the current HDU. However if the application writes out a modified file, it has to be very careful to avoid unwanted duplication of keywords, and preserve the separation of primary and extension headers. If an application modifies the value of an inherited keyword while processing an extension HDU, then it is *recommended recommended* to write the modified value of that keyword into the extension header, leaving the value of the keyword in the primary header unchanged. The primary array keywords *should should* only be modified when the intent is to explicitly change the value that will subsequently be inherited in the extensions.

Also if the *FITS FITS* file is read in sequentially (e.g., from tape or Internet downloads), the reader would need to cache the primary header in case it turns out that a later extension in the file uses the *INHERIT INHERIT* keyword.

Appendix L: Green Bank convention

This *Appendix appendix* is not part of the *FITSstandardFITS Standard*, but is included for informational purposes.

The Green Bank convention was developed at a meeting in October 1989 at the US National Radio *Astronomy Astronomy* Observatory in Green Bank, West Virginia, to discuss the use of *FITS for single dish radio astronomy FITS for single-dish radio-astronomy* data, and has since been widely used in conjunction with the SDFITS convention¹⁶. It was devised primarily to record WCS keywords independently for each row of a table containing an image array column, but subsequently it has found *more general more-general* application.

¹⁶ <http://fits.gsfc.nasa.gov/registry/sdfits.html>

The basic idea is that of expanding header keywords into **binary table** **binary-table** columns, and vice versa, of collapsing unvarying **binary table** **binary-table** columns into header keywords.

For example, the standard header keyword DATE-OBS, which records the date and time of observation, could be expanded into a column with **TTYPEn** **TTYPEn** = 'DATE-OBS' 'DATE-OBS' to record the date and time independently for each row of a binary table. Conversely, a **binary table column with TYPEn binary-table column with TYPEn** = 'HUMIDITY' 'HUMIDITY' containing the same value in each row, could be collapsed into a keyword, HUMIDITY, that recorded the constant value.

When the Green Bank convention is used (and arguably otherwise) **a keyword should not**, **a keyword should not** coexist with a column of the same name within a single binary table. Should this situation occur, the column value takes precedence over the keyword.

When expanding keywords into columns, the Green Bank convention applies to all **FITS** **FITS** keywords that may appear in a binary table except for the following, most of which describe the structure or identity of a binary table HDU: XTENSION, BITPIX, NAXIS, NAXIS n , PCOUNT, GCOUNT, TFIELDS, EXTNAME, EXTVER, EXTLEVEL,, TYPEn, TFORM n , TUNIT n , TSCAL n , TZEROn, TNULL n , TDISP n , THEAP, TDIM n , DATE, ORIGIN, COMMENT, HISTORY, CONTINUE, and END.

In order to collapse a column into a keyword, the name of the column (given by **) must TYPEn**) **must** be a valid keyword name, and the column's constant value **must must** be amenable to representation as a valid keyvalue.

Software that implements the Green Bank convention **must must** take into account the possibility that any "keyword" (apart from those on the proscribed list), such as DATE-OBS, may change value from row to row of a table. Moreover, when searching the header for a particular keyword, it must first consider the values of the TYPEn keywords in case the desired keyword has been expanded as a column. Likewise, it must consider each header keyword potentially as a collapsed column, so that a request for the value in a particular row or rows of the non-existent 'HUMIDITY' HUMIDITY column would be satisfied by the value of the HUMIDITY keyword.

References

Note: Many of these **FITS** **FITS** references are available electronically from the NASA Astrophysics Data System (ADS) and/or the **FITSSupport Office** **websites** **FITS Support Office websites** at <http://adswwww.harvard.edu> and http://fits.gsfc.nasa.gov/fits_documentation.html.

- Allen, S. & Wells, D. 2005, IETF RFC 4047, <http://www.ietf.org/rfc/rfc4047.txt>
- ANSI 1977, **American National Standard for Information Processing: Code for Information Interchange** **American National Standard for Information Processing: Code for Information Interchange**, ANSI X3.4-1977 (ISO 646) New York: American National Standards Institute, Inc.
- Braden, R. T., Borman, D.A., and Partridge, C. 1988 ACM Computer Communication Review, 19, no. 2, 86, IETF RFC 1071, <https://tools.ietf.org/html/rfc1071>
- Bradner, S. 1997, IETF RFC 2119, <http://www.ietf.org/rfc/rfc2119.txt>
- Bunclark, P. & Rots, A. 1997, **Precise re-definition of DATE-OBS Keyword encompassing the millennium** **Precise re-definition of DATE-OBS Keyword encompassing the millennium**, <http://fits.gsfc.nasa.gov/year2000.html>
- Calabretta, M. R. & Greisen, E. W. 2002, A&A, 395, 1077

- Calabretta, M. R. & Roukema, B. F. 2007, MNRAS, 381, 865
- Cotton, W. D., Tody, D. B., & Pence, W. D. 1995, A&AS, 113, 159
- Cotton, W. D., et al. 1990, **Going AIPS: A Programmer's Guide to the NRAO Astronomical Image Processing System** **Going AIPS: A Programmer's Guide to the NRAO Astronomical Image Processing System**, Charlottesville: NRAO
- Deutsch P. 1996, RFC 1951, Network Working Group; available online: <http://tools.ietf.org/html/rfc1951>
- Folkner, W. M., Williams, J. G., & Boggs, D. H. 2009, Interplanetary Network Progress Report 42-178, available online: http://tmo.jpl.nasa.gov/progress_report/42-178/178C.pdf
- Folkner, W. M. et al. 2014, Interplanetary Network Progress Report 42-196, available online: http://ipnpr.jpl.nasa.gov/progress_report/42-196/196C.pdf
- Greisen, E. W. & Calabretta, M. R. 2002, A&A, 395, 1061
- Greisen, E. W., Calabretta, M. R., Valdes, F. G., & Allen, S. L. 2006, A&A, 446, 747
- Greisen, E. W. & Harten, R. H. 1981, A&AS, 44, 371
- Grosbøl, P., Harten, R. H., Greisen, E. W., & Wells, D. C. 1988, A&AS, 73, 359
- Grosbøl, P. & Wells, D. C. 1994, **Blocking of Fixed-block Sequential Media and Bitstream Devices** **Blocking of Fixed-block Sequential Media and Bitstream Devices**, <http://fits.gsfc.nasa.gov/blocking94.html>
- Hanisch, R., et al. 2001, A&A, 376, 359
- Harten, R. H., Grosbøl, P., Greisen, E. W., & Wells, D. C. 1988, A&AS, 73, 365
- IAU 1983, **Transactions of the IAU** **Transactions of the IAU**, XVIIIIB, 45
- IAU 1988, **Transactions of the IAU** **Transactions of the IAU**, XXB, 51
- IAU 1997, Resolution B1 of the XXIIIrd General Assembly – Transactions of the IAU Vol. XXIII B, Ed. J. Andersen, (Dordrecht: Kluwer). Available online: http://www.iau.org/static/resolutions/IAU1997_French.pdf
- IEEE 1985, **American National Standard – IEEE Standard for Binary Floating Point Arithmetic** **American National Standard – IEEE Standard for Binary Floating Point Arithmetic**, ANSI/IEEE 754-1985, New York: American National Standards Institute, Inc.
- Irwin, A. W. & Fukushima, T. A. 1999, A&A348, 642
- ISO 2004, **Information technology – Programming languages – Fortran** **Information technology – Programming languages – Fortran**, ISO/IEC 1539-1:2004, Geneva: International Organization for Standardization
- ISO 2004b, International Standard ISO 8601:2004(E), **Data elements and interchange formats – Information interchange – Representation of dates and times**
- NASA/JPL Planetary Ephemerides 2014a, available online: <http://ssd.jpl.nasa.gov/?ephemerides>
- NASA/JPL Solar and Planetary Ephemerides 2014b, available online: http://ssd.jpl.nasa.gov/?planet_eph_export
- Mallory, T. & Kullberg, A. 1990, IETF RFC 1141, <https://tools.ietf.org/html/rfc1141>
- McNally, D., ed. 1988, **Transactions of the IAU, Proceedings of the Twentieth General Assembly** **Transactions of the IAU, Proceedings of the Twentieth General Assembly** (Dordrecht: Kluwer)
- Park, X. & Miller, X. 1988, Comm. ACM, 31, Issue 10, 1192; available online: <http://dl.acm.org/citation.cfm?id=63042>
- Pence, W. D., Seaman, R., & White, R. L. 2009, PASP, 121, 414
- Pence, W. D., Chiappetti, L., Page, C. G., Shaw, R. A., & Stobie, E. 2010, A&A, 524, A42
- Pence, W. D., Seaman, R., & White, R. L. 2013, **Tiled Table Convention for Compressing FITS Binary Tables**, **FITS FITS Support Office**; available online: <http://fits.gsfc.nasa.gov/registry/tiletablecompression.html>
- Ponz, J. D., Thompson, R. W., & Muñoz, J. R. 1994, A&AS, 105, 53
- Rice, R. F., Yeh, P.-S., & Miller, W. H. 1993, in Proc. 9th AIAA Computing in Aerospace Conf., AIAA-93-4541-CP, American Institute of Aeronautics and Astronautics
- Rijsinghani, A. (ed.) 1994, IETF RFC 1624, <https://tools.ietf.org/html/rfc1624>
- Rots, A. H., Bunclark, P. S., Calabretta, M. R., Allen, S. L., Manchester, R. N. & Thompson, W. T. 2015, A&A, 574, A36
- Schmitz, M., et al. 1995, **Information & On-line data in Astronomy** **Information & On-line data in Astronomy**, eds. D. Egret & M. A. Albrecht (Kluwer Academic Pub.), 259
- Standish, E. M. 1990, A&A, 233, 252
- Standish, E. M. 1998, JPL Memo IOM 312.F-98-048
- Wells, D. C., Greisen, E. W., & Harten, R. H. 1981, A&AS, 44, 363
- Wells, D. C. & Grosbøl, P. 1990, **Floating Point Agreement for FITS** **Floating Point Agreement for FITS**, <http://fits.gsfc.nasa.gov/fp89.txt>
- White, R. L. 1992, in Proceedings of the NASA Space and Earth Science Data Compression Workshop, ed. J. C. Tilton, Snowbird, UT; available online:

https://archive.org/details/nasa_techdoc_19930016742

White, R. L., & Greenfield, P. 1999, in ADASS VIII, ASP Conf. Ser. 172, eds.

D. M. Mehringer, R. L. Plante, & D. A. Roberts (San Francisco: ASP), 125

White, R. L., Greenfield, P., Pence, W., Tody, D. & Seaman, R. 2013, *Tiled Image Convention for Storing Compressed Images in FITS* FITS Binary Tables, FITS FITS Support Office; available online: <http://fits.gsfc.nasa.gov/registry/tilecompression.html>

Ziv, J., & Lempel, A. 1977, IEEE Transactions on Information Theory, 23 (3), 337

DRAFT

Index

N_{bits} , 11, 12, 17

angular units, 10, 31

ANSI, 3, 56

ANSI, IEEE, 16, 26

array descriptor, 22–24, 26–29

array size, 11, 12, 17

array value, 3, 4, 14, 20

array, multi-dimensional, 5, 24, 30, 59

array, variable-length, 1, 24, 27–29, 59

ASCII character, 3, 16, 19, 21, 56

ASCII table, 19

ASCII text, 3–5, 7, 13, 21, 25, 56

ASCII, ANSI, 66

AUTHOR, 13

binary table, 4, 16, 22, 54

BITPIX, 11, 12, 14, 16–19, 22

BLANK, 14, 16

blocking, 6

BSCALE, 14, 16

BUNIT, 14

byte order, 5, 16, 26

BZERO, 14, 16

case sensitivity, 6, 7, 10, 20, 23

character string, 3, 7, 21, 24, 25

checksum, 15, 45, 48, 49, 62–65

COMMENT, 6, 13

complex data, 9, 23, 26, 27

compressed binary tables, 48, 54, 62

compressed images, 44, 54, 62

compression algorithms, 44, 49, 50

compression, lossy, 48

conforming extension, 3–5

CONTINUE, 6, 7, 62

coordinate systems, 29

DATAMAX, 14

DATAMIN, 14

DATE, 12, 42

DATE-OBS, 13, 42

DATExxxx, 13, 42

deprecate, 3, 4, 6, 9, 13, 16, 22, 30, 31, 34

dithering, 47

durations, 43

END, 5, 11, 17, 18, 20, 22, 28

EPOCH, 34

EQUINOX, 34

EXTEND, 12

extension, 3–5, 15, 16, 59, 61

extension registration, 5, 11

extension type name, 3, 5, 11, 15

extension, conforming, 3–5

extension, standard, 4, 5

EXTLEVEL, 15

EXTNAME, 15

EXTVER, 15

field, empty, 22, 25, 26

file size, 4

fill, 5, 6, 11, 18, 20, 21, 24, 25, 28

FITS structure, 3, 4, 6, 12

floating-point, 8, 26, 56

floating-point FITS agreement, 67

floating-point, complex, 9, 26

format, data, 16

format, fixed, 7

format, free, 7, 8, 52

format, keywords, 7

Fortran, 5, 19–21, 24, 66

GCOUNT, 12, 17–19, 22

Green Bank convention, 31, 62, 66

group parameter value, 3, 17, 18

GROUPS, 17

GTI tables, 43

GZIP compression, 50

H-compress algorithm, 51

HDU, 4, 11

HDU, extension, 3, 4

HDU, primary, 3–5

header space, preallocation, 14, 62

heap, 4, 12, 22–24, 26, 28

HISTORY, 6, 14

hyphen, 6, 20, 23, 31, 34

IAU, 1, 4, 66

IAU Style Manual, 10, 67

IAUFWG, 1, 4–6, 11, 29, 41, 59

IEEE floating-point, 16

IEEE special values, 4, 14, 16, 56

image extension, 18

INHERIT, 15, 62, 65

INSTRUME, 13

integer, 16-bit, 16, 26

integer, 32-bit, 16, 26

integer, 64-bit, 16, 26

integer, complex, 9

integer, eight-bit, 16, 26

integer, unsigned, 14, 16, 23, 26

ISO-8601 date, 37

JD, 37

keyword record, 5, 6

keyword, commentary, 6, 13

keyword, indexed, 4, 6, 11

keyword, mandatory, 7, 10, 17–19, 22, 54

keyword, new, 16

keyword, order, 11, 17, 19

keyword, required, 4, 10, 11, 17, 18, 22, 44, 48

keyword, reserved, 4, 12, 17, 18, 20, 22, 30, 31, 42, 45, 49, 54

keyword, valid characters, 6

logical value, 8, 25, 26

magnetic tape, 6
 min and max in columns, keywords, 20, 24, 62
 MJD, 37

 NaN, IEEE, 16, 26, 56, 57
 NAXIS, 4, 5, 11, 12, 17–19, 22
 NAXIS1, 17, 19, 21, 22, 24, 25, 28
 NAXIS2, 19, 21, 22, 24, 25, 28
 NAXISn, 5, 11, 12, 17, 18
 NULL, ASCII, 3, 25

 OBJECT, 13
 OBSERVER, 13
 order, byte, 5, 16, 26
 order, extensions, 5
 order, FITS structures, 4
 order, keyword, 6, 11, 17, 19
 ORIGIN, 12

 PCOUNT, 12, 17–19, 22, 28
 phase, 43
 physical value, 3, 4, 14, 17, 18, 20, 23
 PLIO compression, 50
 primary data array, 3–5, 17, 18
 primary header, 3, 4, 11, 17
 PSCALn, 17, 18
 PTYPEn, 17, 18
 PZEROn, 17, 18

 quantization of data, 46, 63

 random groups, 3, 16, 17
 random-groups, 14
 random-groups array, 17
 REFERENC, 13
 repeat count, 4, 22, 25
 Rice compression, 50

 scaling, data, 17, 18, 20, 23
 sign bit, 16
 sign character, 8, 21
 SIMPLE, 5, 11, 17
 slash, 7, 10
 solar system ephemeris, 41
 special records, 3–5
 special values, IEEE, 26
 standard extension, 4, 5

 TABLE, 19
 TBCOLn, 19
 TDIMn, 24
 TDISPn, 20, 24
 TELESCOP, 13
 TFIELDS, 19, 22
 TFORMn, 19, 22, 25, 26, 28
 THEAP, 24, 28
 time, 12, 13, 34, 36, 37
 time keywords, 42
 time reference, 38
 time reference direction, 40
 time reference position, 39
 time resolution, 42
 time scale, 37, 38

 time units, 41
 time, universal, 12, 38
 timelag, 43
 TIMESYS, 37
 TNULLn, 20, 21, 24, 26
 TSCALn, 20, 23, 28
 TTYPEn, 20, 23
 TUNITn, 20, 23
 two's complement, 16, 26
 TZEROn, 20, 23, 28

 underscore, 6, 20, 23
 units, 4, 10, 14, 20, 23, 31, 36

 value, 6, 7, 12
 value, undefined, 7, 14, 16, 20, 21, 24, 60
 variable-length array, 1, 24, 27–29, 59
 variable-length arrays, compression, 49

 WCS, 29
 WCS, celestial, 34
 WCS, spectral, 34
 WCS, timing, 36, 62

 XTENSION, 3, 5, 11, 15, 18, 19, 22